



Nelson Electricity Ltd Asset Management Plan

April 2016 – March 2026

April 2016



Nelson Electricity Ltd central Nelson city view

Table of Contents

COMPLIANCE SUMMARY	1
SECTION 1 - SUMMARY OF ASSET MANAGEMENT PLAN	3
1.1 BACKGROUND AND OBJECTIVES	3
1.2 ASSETS COVERED	3
1.3 SERVICE LEVELS	4
1.4 NETWORK DEVELOPMENT AND LIFECYCLE ASSET MANAGEMENT PLANNING	4
1.5 ASSET INFORMATION MANAGEMENT	5
1.6 RISK ASSESSMENT	5
1.7 EVALUATION OF PERFORMANCE	6
1.8 EXPENDITURE FORECASTS AND RECONCILIATIONS	6
SECTION 2 - BACKGROUND AND OBJECTIVES	9
2.1 OBJECTIVES	9
2.2 PLANNING PROCESS	10
2.3 PLANNING PERIOD	11
2.4 ISSUES FOR NEL ASSET MANAGEMENT CONSIDERATION	12
2.5 STAKEHOLDER INTERESTS	12
2.6 RESPONSIBILITIES	14
2.7 ASSET MANAGEMENT JUSTIFICATION	16
2.8 INFORMATION MANAGEMENT	16
2.9 OFFICE MANAGEMENT SYSTEM KEY DRIVERS	16
2.10 OFFICE MANAGEMENT SYSTEM INPUTS	17
2.11 OFFICE MANAGEMENT SYSTEM OUTPUTS	17
2.12 GEOGRAPHIC INFORMATION SYSTEM (GIS)	18
2.13 GEOGRAPHIC INFORMATION SYSTEM (GIS) INPUTS	18
2.14 GEOGRAPHIC INFORMATION SYSTEM (GIS) OUTPUTS	18
2.15 OUTAGE STATISTIC MANAGEMENT	19
2.16 KEY ASSUMPTIONS	20
2.17 CAPABILITY TO DELIVER	24
SECTION 3 - ASSETS COVERED	25
3.1 INTRODUCTION	25
3.2 IDENTIFICATION OF ASSETS	26
3.3 JUSTIFICATION OF ASSETS	27
3.4 LOCATION, AGE AND CONDITION OF ASSETS	28
3.5 ASSET REPLACEMENT	32
3.6 NON-ASSET SOLUTIONS	37
3.7 DISTRIBUTED GENERATION	38
3.8 ENVIRONMENTAL CONSIDERATIONS	38
3.9 CONNECTION TERMS AND CONDITIONS (COMMERCIAL)	39
3.10 SAFETY STANDARDS	39
3.11 TECHNICAL STANDARDS	39
3.12 RE-DEPLOYMENT AND UPGRADE OF EXISTING ASSETS	39
3.13 ACQUISITION OF NEW ASSETS	40
3.14 ADOPTION OF NEW TECHNOLOGY	40
3.15 DISPOSAL OF EXISTING ASSETS	40
SECTION 4 - SERVICE LEVELS	41
4.1 RELIABILITY AND PERFORMANCE	41
4.2 SAIDI - SYSTEM AVERAGE INTERRUPTION DURATION INDEX	43
4.3 SAIFI - SYSTEM AVERAGE INTERRUPTION FREQUENCY INDEX	44

4.4	CAIDI - CUSTOMER AVERAGE INTERRUPTION DURATION INDEX	45
4.5	NUMBER OF FAULTS PER 100 KILOMETRES OF NETWORK	46
4.6	ASSET PERFORMANCE	47
4.7	FINANCIAL PERFORMANCE	48
4.8	IMPROVEMENTS	50
4.9	QUALITY OF SUPPLY	52
4.10	CUSTOMER SERVICE	56
SECTION 5 - NETWORK DEVELOPMENT		61
5.1	PLANNING CRITERIA	61
5.2	PREDICTED NETWORK DEMAND GROWTH	64
5.3	DEVELOPMENT PLAN	86
5.4	CAPITAL EXPENDITURE PLANNING	87
SECTION 6 - LIFE CYCLE ASSET MANAGEMENT PLANNING		95
6.1	INTRODUCTION	95
6.2	MAINTENANCE INPUTS	96
6.3	MAINTENANCE TYPES	96
6.4	AUDITING AND MAINTENANCE BY ASSET TYPE	96
6.5	NETWORK CONNECTION POINTS	101
6.6	NEW TECHNOLOGY	101
SECTION 7 - NON-NETWORK DEVELOPMENT, MAINTENANCE AND RENEWAL		103
7.1	INTRODUCTION	103
7.1	NON NETWORK ASSET DESCRIPTION	103
7.2	NON NETWORK ASSET DEVELOPMENT, MAINTENANCE AND RENEWAL POLICIES	103
7.3	DESCRIPTION OF MATERIAL CAPITAL EXPENDITURE OR MAINTENANCE PROJECTS	103
SECTION 8 - RISK MANAGEMENT		105
8.1	INTRODUCTION	105
8.2	RISK MODELLING	105
8.3	IMPACT	109
8.4	PROBABILITY	109
8.5	ASSET PERFORMANCE STANDARDS	110
8.6	AUDITING PROGRAMME	112
8.7	RISK ASSESSMENT	112
8.8	EXPOSURE TO NATURAL DISASTERS	112
8.9	EXPOSURE TO NATURAL DISASTERS	115
8.10	EXPOSURE TO PHYSICAL RISK	116
8.11	EMERGENCY PLANS	117
SECTION 9 - EVALUATION OF PERFORMANCE		119
9.1	EVALUATION OF PERFORMANCE	119
9.2	REVIEW OF PROGRESS AND GAP ANALYSIS	119
SECTION 10 - EXPENDITURE FORECASTS AND RECONCILIATIONS		125
10.1	CAPITAL EXPENDITURE	125
10.2	OPERATIONAL EXPENDITURE	126
APPENDICES		129
APPENDICES A-E		129
INFORMATION DISCLOSURE COMPLIANCE SCHEDULES (11-13)		137

Compliance Summary

Nelson Electricity continually improves the Asset Management Plan where areas of weakness have been identified.

To maintain the Asset Management Plan to a high standard, Nelson Electricity reviews other lines companies Asset Management Plans and makes changes where improvements can be identified.

This Plan is also peer reviewed by qualified electrical engineers with all comments taken into account.

SECTION 1 - Summary of Asset Management Plan

This Asset Management Plan is prepared as the key internal asset planning document for Nelson Electricity. It is also designed to meet Electricity Information Disclosure Requirements. The Plan contains sufficient information that will demonstrate to stakeholders that Nelson Electricity's asset management processes are in line with best practice.

This Plan was approved by the Board of Directors on 31 March 2016.

1.1 Background and Objectives

Nelson Electricity's goals are to:

- Have network reliability and performance consistent with other networks of similar kind in New Zealand;
- Manage and configure the assets efficiently, including responding to customers' requests for additional reliability where those customers are prepared to enter into appropriate contracts;
- Ensure commercial returns to its shareholders.

This Asset Management Plan is written in support of these goals and outlines:

- The current state of the assets;
- The role of risk modelling and Asset Performance Standards;
- The tools for planning and executing continuous improvement;
- Stakeholder interests;
- Service levels;
- Asset maintenance;
- Network development.

This Plan, which will be treated as a dynamic document, covers the 10 year period from 1 April 2016 to 31 March 2026, and will next be updated 1 April 2017. The Plan represents the best estimates, according to current criteria and known events, and this may be subject to change if different circumstances prevail. The main focus is on the current years projects and works identified as more certain. Beyond this the Plan is more indicative and subject to change as new requirements are identified.

1.2 Assets Covered

The Nelson Electricity network comprises approximately 9,200 connections in a concentrated area of 24 square kilometres in the central Nelson city area. The connections are largely CBD, industrial and dense urban. Nelson Electricity has a peak loading of 33.0MW, during winter months and distributes 145GWh annually through the network.

The distribution system has four 33kV feeders supplying one 33kV Zone Substation. Thirteen 11kV feeders radiate to ultimately supply 198 11kV/400V transformer sites that feed the 400V network.



1.3 Service Levels

All assets are maintained in line with good industry practice and the results are reflected in Nelson Electricity's system reliability statistics. Nelson Electricity has the goal to seek reliability and performance statistics consistent with other networks of similar kind in New Zealand while also meeting consumer expectation.

NEL has long term targets of:

- SAIDI 45.0
- SAIFI 0.9
- CAIDI 50.0

Overall Nelson Electricity SAIDI Statistics (Class B & C)




To achieve its goal, Nelson Electricity will continually monitor its asset management and operational processes and carry out ongoing asset life cycle auditing.

1.4 Network Development and Lifecycle Asset Management Planning

Risk modelling and ongoing life cycle audits are the focus for asset management and development within constraints resulting from the regulated environment. Modelling assets against their performance standard defines areas of weakness and is the key driver for the Condition Driven Maintenance programme. Areas of risk are being continually identified and improvement/reinforcement scheduled.

Data obtained from planned preventative maintenance, load surveys, risk modelling and life cycle auditing will influence the direction of the Asset Management Plan.

The capital expenditure for 2016 is dominated by the return to asset replacement and renewal focusing on under rated and aged 11kV cables along with security of supply enhancements to the CBD LV network.

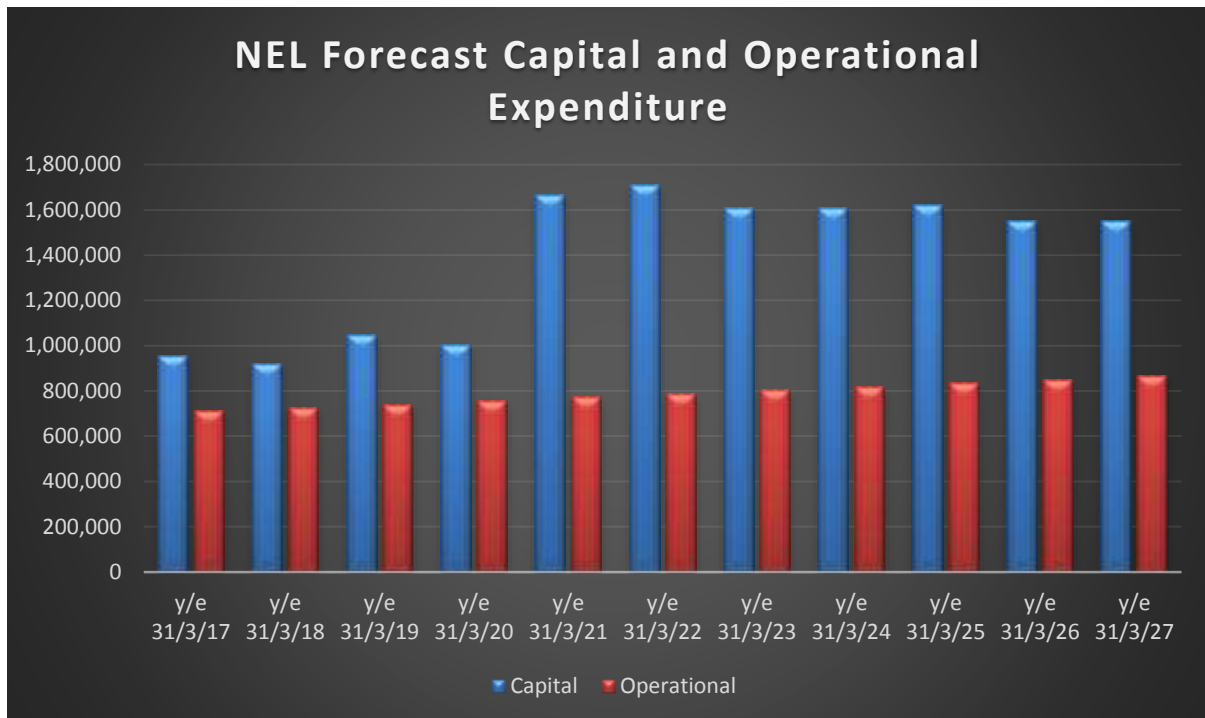

1.5 Asset Information Management

All asset and business information is contained in the Office Management System which provides computerised control of information and workflows. This system uses Microsoft Office software products and manages all information crucial to the execution of Nelson Electricity’s business. The main component for assets is the Access Database which provides storage, updating and retrieval of information. System forms and reporting facilities provide for continuous improvement and accountability for staff and contractors. The Office Management System is complemented by GIS software.

1.6 Risk Assessment

Risk assessment is the risk of failure of assets causing non supply to consumers as well as consumer and worker safety. The assessment process is Nelson Electricity’s key driver for maintenance and the continual improvement of the operation and development of the network. An asset risk model is utilised to assess the performance of an asset against a given Asset Performance Standard. This is used to determine the adequacy of the asset and whether replacement or upgrade is required.

The Asset Performance Standard takes into consideration the aspects of the impact and probability of asset failure. Asset condition audits provide accurate information on each individual asset and its life cycle performance. The audit results are input to the Access Database and the asset modelled for its own asset performance ranking compared to the appropriate standard.

Asset Performance Standards are also used for evaluating capital work and modelling corrective action contingencies for the most appropriate solution for non-complying assets.

1.7 Evaluation of Performance

The Nelson Electricity Asset Management Plan is a dynamic document and can be changed at any stage during the year when issues are identified or changes needed. It is based on best industry practise and is peer reviewed prior to disclosure.

Nelson Electricity's costs are relatively stable even with pressures coming from areas such as compliance with regulation and local government conditions for digging in streets. It is expected Nelson Electricity can continue to maintain direct and indirect costs at current levels.

Reliability has improved over recent years with the completion of major project works contributing to a reduction in Class C (unplanned) outages. At the same time there has been a very large reduction in Class B outages (planned) while the focus has been completing the 33kV Zone Substation replacement and the installation of a fourth 33kV feeder from Transpower's Stoke Substation. Together this has resulted in an improved overall SAIDI performance. Whilst remaining within the forecast 45 minutes, the overall SAIDI statistics are expected to rise from the 2016 level following reprioritising of the capital plan over 2015/16 and the subsequent implementation of proposed works in the short to medium term.

The number of faults on the network for 2015/16 is calculated at five per 100 kilometres of line. Although this is lower than the industry average, it remains higher than the Nelson Electricity target of four. Nelson Electricity has set this target given approximately 10% of the network is overhead. Initiatives put in place to reduce the impact of cable strikes has improved the overall fault rate in recent years but Nelson Electricity will continue to educate contractors on the risks associated with digging near or around cables and has also implemented a rigorous vegetation management programme to reduce the fault rate on the overhead sections of the network.

The flattening of peak demand and reduction of kilowatt hour consumption since 2008 has reduced the capacity utilisation and load factors to below target. The lowering of consumption has not meant a removal of transformer capacity as the reduction has been across the network rather than any large individual consumer disconnecting from the network. These factors are unlikely to improve over the short to medium term given the forecast continued decline in consumption due to energy efficiency and energy conservation throughout the network.

Nelson Electricity does not have many issues with fluctuating voltage or with harmonics and interference. Any issues with these are investigated promptly and dealt with if an issue is identified.

Nelson Electricity records are continually being updated and input into the Office Management System and GIS software. Historical as-built cable records remain on hand drawn plans and in field books. Nelson Electricity is still looking at options to economically convert these into electronic or GIS records.

The Office Management System and Risk Model system are both flexible systems easily modified in accordance with Nelson Electricity's continual improvement philosophies.

All staff are involved in evaluating the performance of the Asset Management Plan and business in general. Regular meetings are held to review and discuss improvements to the Office Management System, Risk Model, Asset Management Plan and Business Plan. The Improvement Form is the tool for invoking improvements and solutions to the network and its management.

Gap analysis is the process of the Office Management System identifying the gaps in the system and reporting them to management. The results are then portrayed by the Improvement Form or scheduled on an internal staff Planner for corrective and, if necessary, preventive action.

1.8 Expenditure Forecasts and Reconciliations

A review of progress against the financial portions of the Asset Management Plan Update 2014–2024 and the Asset Management Plan Update 2015–2025 shows Nelson Electricity has overspent the Capital Expenditure and underspent the Operational Expenditure budgets in the year ending 31 March 2015.

It is anticipated to underspend both Capital and Operational Expenditure budgets for the year ending 31 March 2016.

Expenditure for year ending 31 March 2015

Expenditure	Actual 31 Mar 2015	Budget 31 Mar 2015	Variance % 31 Mar 2015
Total Capital Expenditure	\$1,265,000	\$885,000	143%
Total Operational Expenditure	\$1,906,000	\$2,399,000	79%

The Capital Expenditure for the year ending 31 March 2015 was above the Asset Management Plan estimate due to the completion of the cut-over from the old outdoor Zone Substation to the new indoor Zone Substation at Haven Road being undertaken in the 2014/15 year when most of this work was planned to be completed the previous year. This additional expenditure of \$663,000 was partially offset by the deferral and removal of most growth related projects for the year due to flat demand and declining kilowatt hour consumption.

Network Operational Expenditure for the year ending 2015 was \$535,000 which was \$264,000 under the budget of \$799,000. This was due to a reprioritising of works as a result of diverting contractor resources to the completion of the new Zone Substation project. All urgent and safety related works were undertaken and did not compromise network security of supply.

Non-Network Expenditure was 14% lower for the year. This was a good result given the additional workload to complete the new Zone Substation at Haven Road and the additional resources required dealing with regulatory compliance eg; The Default Price Quality Path 2015-2020 reset.

Expenditure for year ending 31 March 2016

Expenditure	Estimate 31 Mar 2016	Budget 31 Mar 2016	Variance % 31 Mar 2016
Total Capital Expenditure	\$650,000	\$869,000	75%
Total Operational Expenditure	\$1,954,000	\$2,109,000	93%

The forecast Capital Expenditure for 2015/16 will be \$650,000 which will be under the disclosed estimate in the 2015-2025 Asset Management Plan Update of \$869,000. A number of growth projects and renewal projects have been deferred or removed from the Plan due to continued flat demand and forecast kilowatt hour consumption reduction.

Network operating expenditure forecast for the year ending 2016 is \$554,000 which is \$211,000 under the budget of \$765,000. This 28% reduction is as a result of less works due to planned preventative maintenance and asset auditing programmes. There were also reductions in vegetation management costs and unplanned maintenance.

Non-Network Expenditure is forecast to be line with the budget of \$1,081,000.

SECTION 2 - Background and Objectives

Nelson Electricity Limited (NEL) is a limited liability company registered under the Companies Act 1993 and is jointly owned by Network Tasman and Marlborough Lines. NEL owns and operates the electricity distribution network in the central Nelson city area.

NEL's principal mission is to –

“own and operate the electricity network within the central Nelson area commensurate with appropriate standards of maintenance and reliability of supply whilst maximising shareholder value and providing a return at least equal to weighted average cost of capital.”

This Asset Management Plan is prepared as the key internal asset planning document for NEL. It is also designed to meet Electricity Information Disclosure Requirements. The Plan contains sufficient information that will demonstrate to stakeholders that NEL's asset management processes are in line with best practice.

2.1 Objectives

The objective of this Plan is to describe the strategies that will ensure NEL meets the needs of its stakeholders through a reliable and compliant network. The Plan outlines methods of ensuring customer and response standards are met; that all maintenance and development of the network and its assets are carried out utilising resources efficiently and economically; that Asset Risk Management is the key to condition and performance of the network; and that customer requests for alternative combinations of supply, quality and price are adequately considered.

NEL's business goals and objectives are the key drivers influencing this Asset Management Plan. These are listed below.


- **Statement of Corporate Intent**

In accordance with the Section 39 of the Energy Companies Act, NEL submits a draft Statement of Corporate Intent to shareholders for the coming financial year. This gives a high level overview of the business and the direction it is heading. The principal objectives of the Statement of Corporate Intent are taken into account throughout the Asset Management Plan development process:

- To operate as a successful business in the distribution of electricity and other related activities;
- To have regard among other things the desirability of ensuring the efficient use of electricity;
- To ensure that all services and responses to maintenance and fault requirements are provided with an appropriate standard of customer service;
- To maintain existing reliability and efficiency levels;
- To adopt non-discriminatory pricing and network access policies for all users of the NEL network;
- To ensure that all resources, financial, physical, and human are utilised efficiently and economically;
- To seek to provide an appropriate rate of return to shareholders not less than “weighted average cost of capital” and to seek to maximise the longer term value of shareholders' funds;
- To provide for future development of the network through investigation and the acquisition of land and physical assets as is appropriate;
- To ensure the company complies with all legislative requirements including health and safety legislation, and all industry initiatives in respect of safety in the workplace;
- To be a good employer providing;
 - ✦ Remuneration consistent with performance,
 - ✦ A safe, satisfying and stimulating work environment,

- ✦ Equal employment opportunities.
- Contracts such as:
 - Use Of System Agreements;
 - 24 Hour Fault Service Contracts
- Design standards and policies such as:
 - NEL Network Extension and Design Standards 2010;
 - NEL Network Code 2000;
 - NEL Risk Management Policy;
 - NEL Asset Performance Standards.
- Legislation to ensure the company complies with all industry legislative requirements such as:
 - Electricity (Safety) Regulations 2010
 - Electricity Act 1992 and Amendments;
 - Commerce Act 1986
 - Injury Prevention, Rehabilitation and Compensation Act 2001;
 - Electricity Reform Act 1998;
 - Electricity (Hazards from Trees) Regulations 2003;
 - Health and Safety in Employment Act 1992, 1998 and 2002;
 - NZ Electrical Codes of Practice;
 - Resource Management Act 1991;
 - Building Act;
 - Local Government Act;
 - Public Bodies Act;
 - Public Works Act;
 - Human Rights Act 1993;
 - Employment Relations Act 2000;
 - Privacy Act 1993;
 - Electricity Information Disclosure Requirements 2008;
 - AS/NZS 3000 2007;
 - Civil Defence Emergency Act 2002.

2.2 Planning Process

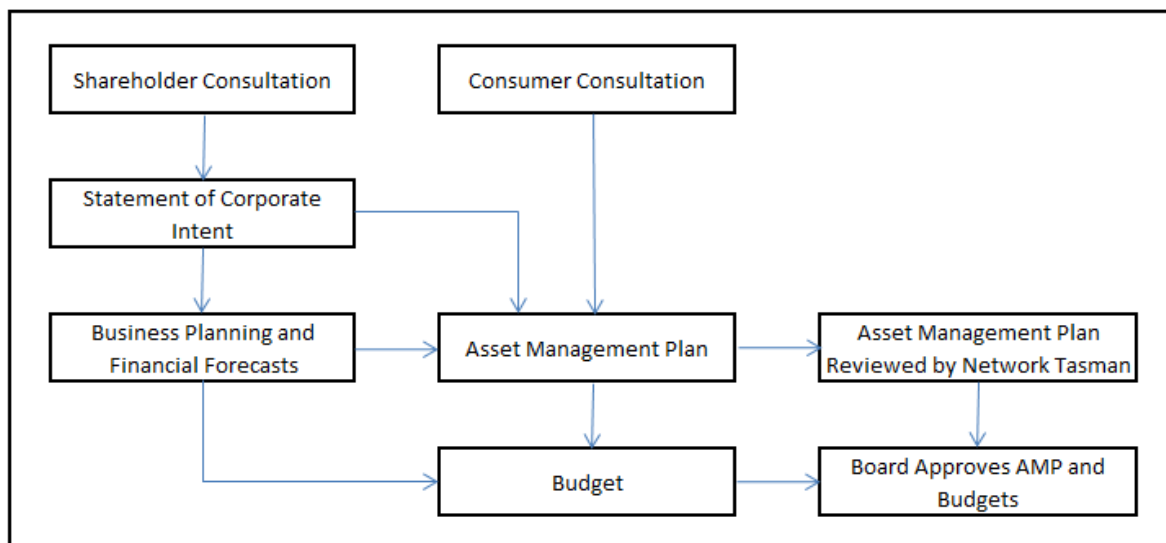

NEL engages various stakeholders when compiling the Asset Management Plan.

- **Shareholders**

NEL's two shareholders (Network Tasman and Marlborough Lines), being Electricity Distribution Businesses, have some input into the asset management process. Both companies have significant expertise that can assist in the development of plans that are in accordance with the requirements. NTL has an additional review role as part of their provision of engineering services agreement with NEL.

- **Retailer Feedback**

NEL does engage electricity retailers on a regular basis as they have a direct contractual relationship with NEL's electricity consumers and also hold their metering information. Retailers have a better grasp on the consumption trends of their customers which NEL can leverage off and take into consideration in asset planning.

- **Consumer Consultation**

NEL engages its consumers on a regular basis. The methods used are:

- Surveys included in NEL newsletters;
- Phone survey of major consumers;
- Phone survey of mass market consumers;
- When applying for new/changed connection;
- Tariff options.

Feedback and survey results are taken into consideration in the asset management planning process.

- **Budgets**

The asset management process provides expenditure level requirements for both capital and operational. These budgets are approved by the NEL Board as close to the beginning of the financial year as possible. The financial year is aligned with the Regulatory Disclosure year 1 April 2016 to 31 March 2017.

- **Business Plan**

The major focus for NEL is the asset management planning process and the subsequent completion of the Asset Management Plan. The works programme and actions identified in the Plan are used as the basis of the Network Business Plan.

2.3 Planning Period

This Plan covers the 10 year period from 1 April 2016 to 31 March 2026. The Asset Management Plan will be reviewed on an annual basis based on the financial year to incorporate up to date information and improvement. Given the Plan covers a 10 year period, there is greater accuracy in the first five years of the planning period compared to the last five as there is more uncertainty and potential for change into the future.

The date of Version 18 is 1 April 2016 and was approved by the Board of Directors on 31 March 2016. The next review date for the Asset Management Plan is 1 April 2017.

As this is a planning document, projects may be included but may alter significantly or not proceed at all due to a change in operational requirements. As such the document is dynamic, being subject to annual review. It can also be amended part way through the 2016-2017 year if circumstances make changes to the Asset Management Plan necessary.

2.4 Issues for NEL Asset Management Consideration

The Asset Management Plan is a comprehensive plan that encompasses the entire asset management process. While every attempt is made to ensure the performance of the network remains high and reliability is consistent with that of other similar networks whilst also meeting consumer expectation, there are issues that may conflict with this.

- Previously NEL has sought to achieve best practice and to be the best network in the country for an adequate return but the potential for conflicting requirements arising from Use of System Agreements, Electricity Act, Energy Company's Act and the Commerce Commission requirements may create another outcome. Over time it can be expected that unless the company has the ability to invest within the network, reliability will diminish.
- Service forecast levels are set to be maintained at current levels into the foreseeable future rather than incremental improvements. The cost associated with improvement in reliability of an already efficient network is high. NEL in 2011 increased line charges to assist in the funding of an additional 33kV feeder and Zone Substation replacement. These projects are now completed.
- The capital Asset Management Plan is based on a minimalist approach because of the uncertainties created by the price path requirements of the Commission. The changes from using the ODV criteria to actual cost has assisted with the capital expenditure planning although there are still some projects that have not proceeded unless there is additional funding from other parties, eg; overhead to underground conversion projects typically only proceed if they have a significant portion paid by Nelson City Council by way of road excavation and reinstatement. All safety projects are proceeding as per normal on an expedited basis.
- Network assets are long-term assets that require long-term planning. Long-term investment within the network is dependent upon the company having the flexibility to invest and receive an appropriate return.

2.5 Stakeholder Interests

The main drivers of the principal mission, objectives, Statement of Corporate Intent and ultimately the Asset Management Plan are the interests of the key stakeholders, expressly the NEL Board, electricity consumers and retailers. Feedback from all stakeholders through surveys, direct communication and the complaints process is used to establish objectives, plans and specifically target levels of service.

NEL also enters into contracts with end use customers that determine level of service drivers for this Asset Management Plan. The NEL Board agrees NEL's overall intentions and objectives and on performance targets and other measures in relation to its objectives through the Statement of Corporate Intent process.

The Asset Management Plan recognises the following stakeholders with interests in Nelson Electricity's asset management:

Stakeholder	Interests
Contractors	Contractors have an interest in asset management to the extent that it sets out network policy, standards and criteria and impacts on physical work undertaken on the system.
Electricity Customers and Retailers	Delivery of a safe, reliable, efficient and sustainable supply of electricity at minimum cost.
Government (Ministry of Economic Development, Commerce Commission, Electricity Commission)	Legislate and control compliance of statutory requirements and economic efficiency.

Stakeholder	Interests
Insurers	NEL insures all substations on the network (except pole mounted substations), including the main Zone Substation at Haven Road. NEL uses insurance brokers Marsh Ltd for all insurance requirements.
Landowners	Landowners with NEL assets on their property have interests in safety, easements and access requirements.
NEL Employees	NEL employees have interests in health and safety and career opportunities.
Property Developers	Property developers wish to ensure that connection policies and costs are fair and that network expansion plans are timely.
Shareholders	Achievement of an adequate return on investment and good corporate citizenship.
Territorial Local Authorities	Territorial authorities have interests in minimising environmental impacts, development of underground power systems, local economic development and in the control of assets in road reserves.
Transit NZ	Transit NZ is interested in controlling assets in road reserves.
Transpower	NEL relies on the Transpower grid to deliver electricity through to the NEL network and Transpower relies on the NEL network to deliver the electricity to end use customers.


Stakeholder interests have been identified and accommodated in the asset management practices of NEL through the following processes:

- The NEL Board of Directors agrees to an annual Statement of Corporate Intent which details corporate strategy with respect to asset management planning.
- Corporate organisational goals and objectives support the establishment and completion of asset management projects consistent with corporate vision.
- Meetings and discussions with customers, developers and landowners help to establish asset management policy and practices in regards to levels of service, charging regimes and network planning including the price/quality trade-off.
- Regular surveys of residential, commercial and large user customers provide valuable feedback on security and reliability of supply which assists in network planning, and on the price-quality trade-off.
- Government and territorial authority legislation provides a key input into the way that asset management work is designed, planned and undertaken.
- Customer complaints provide valuable feedback on quality of supply and influence the development plan.
- Consultation with interested parties over specific projects ensures that they are included in the Asset Management Plan as early as possible to allow sufficient planning to be undertaken.
- Project performance reporting is provided to the Board of Directors on a monthly basis and includes contractor performance, project management performance and financial performance. This is used to establish future Asset Management Plan programmes and to compare progress against targets in each annual Asset Management Plan.

Any conflicting stakeholder interests are managed by systems that ensure that appropriate levels of separation, accountability and authority are in place. Decisions are normally made based on the asset management drivers detailed in the following section, in order of priority as listed below. If these criteria fail to provide a solution, a decision is made by the Board.

2.6 Responsibilities

Accountabilities and responsibilities in respect of network operations and management are summarised in the chart below.

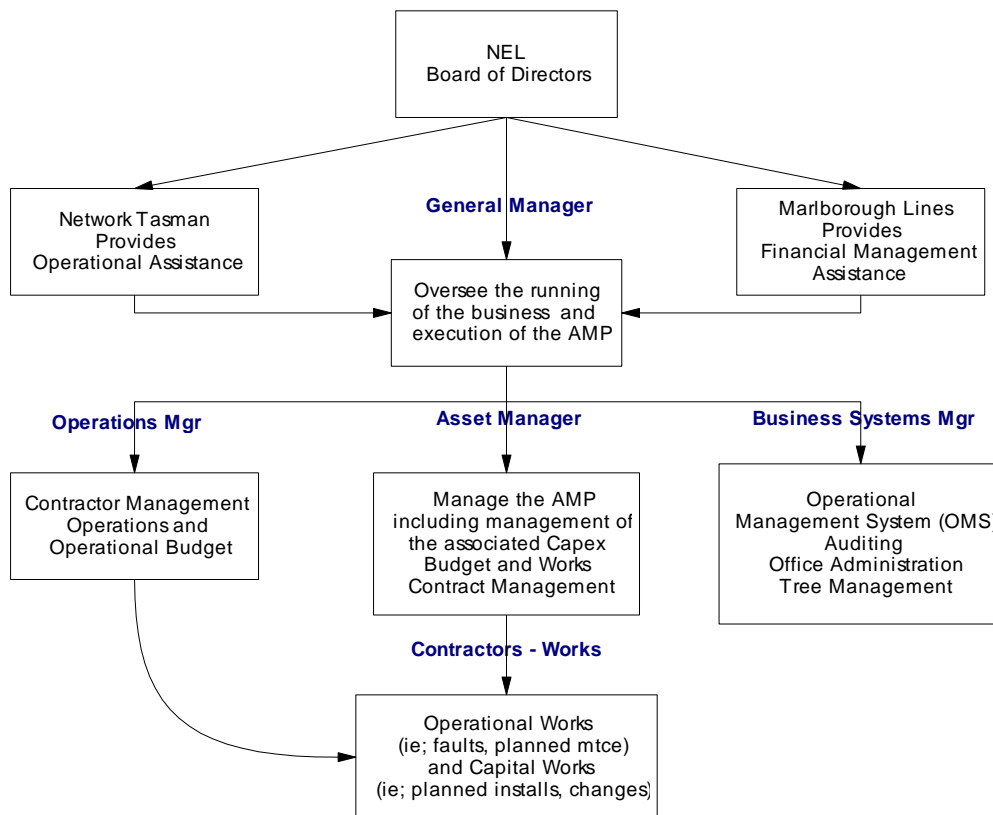

NEL Board of Directors

The Board consists of five Directors; two appointed by Network Tasman, two appointed by Marlborough Lines and one independent Chairman approved by both shareholders. The Directors have the overall governance role of the company and are legally accountable for the company. The Asset Management Plan and budgets are approved by the Board of Directors. Projects exceeding \$50,000 require separate Board approval.

The Board meets every two months as well as being provided with financial performance reports on a monthly basis. The Board meeting agenda includes:

- Financial Reports (performance versus budget);
- Operational Reports (including health and safety, outage statistics, capital project updates, retailer performance, kilowatt hours and network losses);
- Capital Expenditure Proposals.

General Manager

The General Manager is directly responsible for reporting to the Board and attending Board meetings. He has the responsibility for the day to day management of the company and its assets and for implementing company policy. The General Manager is permitted to approve projects up to \$50,000.

Operations Manager

The Operations Manager is directly responsible to the General Manager. He prepares the Operational Budget for inclusion in the Asset Management Plan as well as being involved in the Asset Management Plan development process. The Operations Manager is also responsible for the day to day operation and performance of the network including the management of electrical contractors working on the network. NEL has contracts with electrical contracting companies to cover all physical work undertakings including electrical faults, planned maintenance, renewals and new works. The Operations Manager is responsible for administering these contracts.

Network Manager

The Network Manager is directly responsible to the General Manager. He is responsible for the preparation of the Capital Works Budget. The Network Manager is also responsible for preparation of the Asset Management Plan in conjunction with other staff members. The key role in this position is ensuring the network can cater to the load requirements and ensuring that the network meets the appropriate security of supply standards. The Network Manager also prepares and lets tender documents for all projects estimated to have a cost higher than a value fixed by the Board.

Business Systems Manager

The Business Systems Manager is directly responsible to the General Manager. She has the key responsibility of ensuring the Information Technology requirements of the company are met as well as maintaining information systems and the associated data. The Business Systems Manager edits and ties together the individual inputs which go to form the final Asset Management Plan, then prepares the document for publication and listing on the website. The Business Systems Manager attends and provides editorial and logistical comment at Asset Management Plan meetings.

* * * * *

Provision of Additional Resources

NEL operates with a staff of four to manage the operation of the network. To achieve this and to ensure that the network operates efficiently in terms of network performance and operational efficiency, there is a need to call upon additional resources and skills from time to time. NEL has achieved this by having agreements in place with both shareholding companies for these requirements. The responsibilities of both shareholding companies is summarised below.

- **Network Tasman**
Network Tasman provides engineering and other technical advice. The responsibilities include review of the Asset Management Plan, review of capital and operational budgets, policy development and review, advice on commercial and contractual issues, provide backup staffing resources and help with investigations into major projects from time to time. Network Tasman reports to the General Manager and also to the Board on some issues.
- **Marlborough Lines**
Marlborough Lines provide supervision and management of the financial and administrative functions of NEL. The responsibilities include internal control, management of accounting requirements, payment of salaries, management of PAYE and GST, treasury function, relevant executive reporting to Board, assistance in setting budgets and provision of back-up staffing resources. Marlborough Lines reports to the General Manager and also to the Board.

Electrical Contractors

NEL contracts out all network development, replacement and maintenance to electrical contractors. The main day to day contracts are a fault response and repair contract and planned preventative maintenance contract. All electrical contracting companies must hold an Authorisation Holder Contract with trained staff who have appropriate Class Approvals for the type of work they perform. The main contracts are negotiated with the General Manager and the day to day management of the contracts are managed by the Operations Manager.

Delegations

Document approvals and levels of expenditure delegation are in the following table:

Document/Expenditure Level	Approval Authority
Statement of Corporate Intent	Shareholders
Asset Management Plan	Board
Budgets	Board
Expenditure > \$150,000	Board
Expenditure > \$50,000	Chairman
Expenditure < \$50,000	General Manager

2.7 Asset Management Justification

The Asset Management Plan has a number of drivers and processes in place to enable NEL to deliver a reliable supply of electricity and high quality service now and into the future.

Audit and Maintenance Programme

This programme exists to inspect, test and, if required, maintain all assets on a regular basis to ensure that the safety, reliability and risk assessment goals for the network are met.

Network Development

The development of the network is driven primarily by customer demand. Other significant drivers are the requirement for safety compliance, security of supply and minimal environmental impact.

Performance Measurement

Performance is based primarily on quality of service, which includes safety, power quality, reliability, efficiency and environmental impact. Examples of these are; lost time injury, harmonics, SAIDI statistics, fault response and oil spills, respectively. Financial performance is also significant.

2.8 Information Management

NEL utilises an integrated Office Management System to provide the key drivers to achieve a safe, compliant and efficient network. This system uses Microsoft Office software products which manage all electronic information and documents crucial to the execution of NEL's business.

The implementation and continuing development of the GIS using the current version of ArcView, is amalgamating all asset information into a user-friendly data information and analysis tool. The data which is progressively being linked is:

- 400V Network Schematics;
- 11kV Network Schematics;
- 33kV Network Schematics;
- Connection point and consumer site information;
- Asset condition, location and history;
- Underground cable location plans and field books;
- Asset valuation and ODV;
- Ductline location plans.

2.9 Office Management System Key Drivers

One of the main information systems used by NEL is the Office Management System which controls the following aspects of the business by:

- Providing an interface between the company and its contractors;
- Providing the infrastructure to ensure the Health and Safety of staff, contractors and the public;
- Facilitating continuous improvement;
- Providing individual accountability;
- Reporting on processes, task scheduling, audit requirements, financial statistics;
- Managing stock control;
- Managing asset information;
- Detailing the Risk Model;
- Analysing network data;
- Encompassing the financial system;
- Providing fault history.

2.10 Office Management System Inputs

The inputs to the Office Management System are provided by the following:

- Work Permits;
- Planned Maintenance forms;
- Audit Sheets;
- Fault Sheets;
- Commissioning Sheets.

An Access Database is utilised for the Office Management System and records the asset type, location, condition, components, size, maintenance and auditing records which are acquired from the input data.

The computerised forms used for inputting data and been designed with built-in procedures to assist with the completion of each project.

An example of an Office Management System input is the Work Permit which is a form that is essential for tasks to be undertaken by contractors. The Work Permit, along with other forms, covers the following:

- Outlines parameters of a task;
- Responsibilities - who carries out the work, authorises the work, audits the work;
- Asset addition/change/removal information;
- Asset numbering;
- Timing - advises start and completion dates, date of auditing/payment date. Any task or work not completed by due date appears on the reports produced fortnightly and followed up by staff and management;
- Stock updates - records stock item used and updates stock system;
- Defect liability periods;
- Financial allocations and pricing - records quotes and pricing and budget allocation;
- Auditing - records date of works audited and any non-conformances. Non-conformance details are then recorded on the Improvement Form along with the suggested corrective/preventive action and issued to contractor for correction and sign off;
- Safety and hazard identification;
- Fault Forms also include: fault type; timing; fault cause.

2.11 Office Management System Outputs

From the input data, reports are generated on a fortnightly basis or as required which advise staff and management of:

- Works completed for a set period;
- Works or tasks not completed by their due date;

- Asset information;
- Works for auditing;
- Fault history;
- Contractor works approved weekly report.

Staff and management then follow up these reports especially if deadlines have not been met.

The Task Planner specifies all tasks and works to be carried out by staff and contractors and is issued to staff on a monthly basis. The Planner contains details of the task, responsibility for the task and the proposed completion date. Individual monthly planners are issued to staff for execution of scheduled tasks.

The Audit Programme covers a 10 year period. A list of audits is issued to the Operations Manager with the monthly Planner. A copy of the current Audit Programme is in **Appendix A**.

The Improvement Form is the tool to achieve continuous improvement for the business as a whole. This form is utilised for:

- Recording non-conformances;
- Organising and recording corrective actions;
- Recording measures to prevent recurrences;
- Requests or recommendations for any improvements to any aspect of the business eg; improve a procedure.

Improvement forms are reported on fortnightly for completion date met and auditing of the improvement.

2.12 Geographic Information System (GIS)

The GIS provides valuable information to staff and contractors alike. The GIS plans were converted from Geo-Schematic AutoCad drawings and now reside on ArcView software. The plans consist of separate layers for the 33kV, 11kV and 400V networks overlaid on a DCDB map of Nelson city. Assets included in the system are substations, conductors, poles, link boxes, spare duct lines and pillar boxes as well as customer connection point attributes. The asset information in the GIS is kept as up to date and as accurate as possible. The source for additions, deletions and modifications is from the work permits for the works from the office management system.

2.13 Geographic Information System (GIS) Inputs

The Network Manager is responsible for all editing of the GIS. The inputs for the system come from field audits and network extension/alteration as-built data on a regular basis.

Links have been established between the Asset Database, the ICP Database and the GIS to enable semi-automatic updates to be made to the GIS and for comparative checks to be made between the three systems to ensure that they are all synchronised. An aerial photographic layer of the city improves asset location accuracy and operational efficiency.

2.14 Geographic Information System (GIS) Outputs


All staff members have access to the GIS via ArcReader software although only on a “read only” basis. On a monthly basis the latest version of the system is provided to Authorisation Holder certified contractors working on the network. Geo-schematic drawings of the 33kV, 11kV and 400V networks are printed in hardcopy and displayed on separate wall maps in the Zone Substation Control Room for operational purposes. These maps are updated on a monthly basis.

A computer containing ArcReader and an AutoCad reader resides in the Control Room so that Operators are able to access "live" 11kV and 400V network data for operational, fault and switching information.

2.15 Outage Statistic Management

NEL is required to collect and record accurate information regarding all transmission, sub-transmission and 11kV outages. The methods and information used has to be robust as the information is used in the disclosure of both SAIDI and SAIFI statistics as part of the Quality Threshold disclosure. Overleaf is a flow chart on the collection and management of outage information.

Outage Statistics Reporting Flow Chart

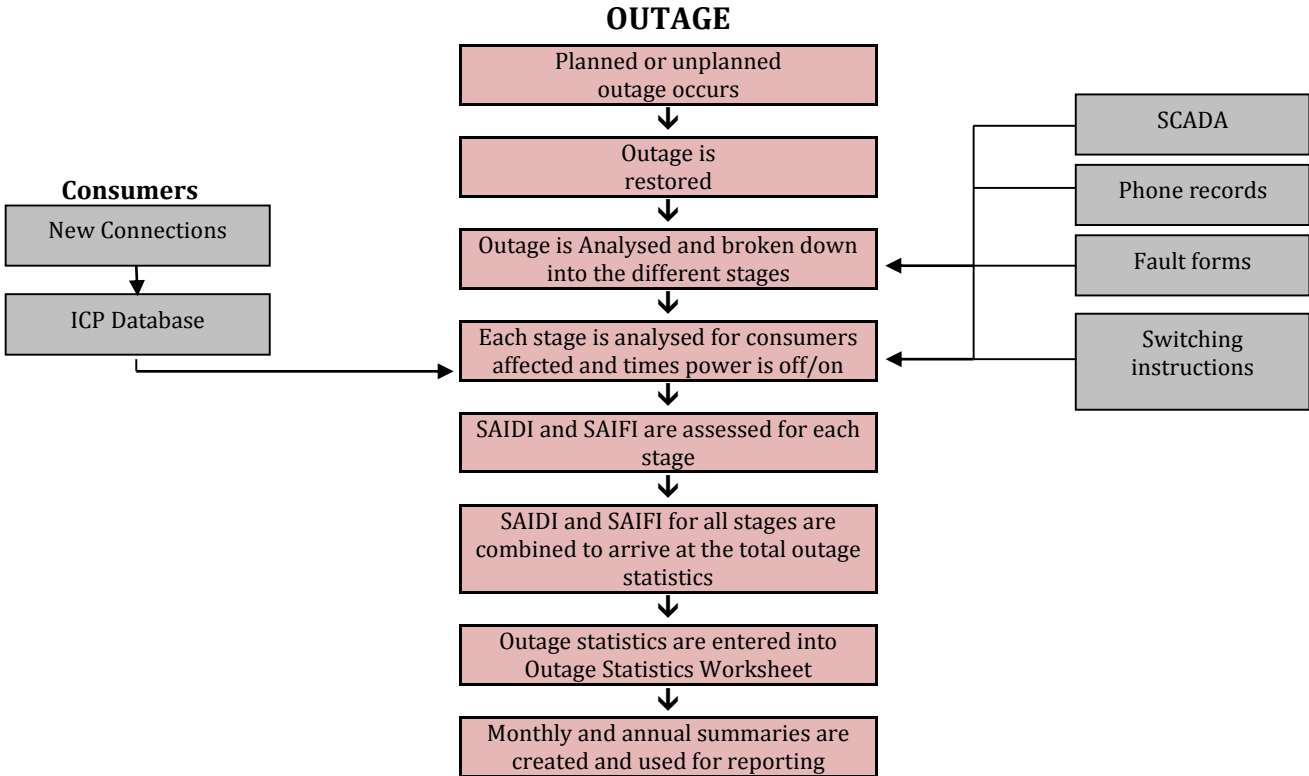

2.16 Key Assumptions

The Asset Management Plan is a document with a planning period of 10 years. The Plan is based on known information about the network and the environment but there are assumptions made about many aspects of the business. This section outlines some of the major assumptions made to complete this Plan.

This section is also written in a format that complies with the Electricity Distribution Information Disclosure Determination 2012.

The Electricity Distribution Information Disclosure Determination introduces new requirements in relation to Asset Management Plan information. In addition to the information to be included in the Asset Management Plan, each assumption combines the requirements where applicable:

- All significant assumptions, clearly identified in a manner that makes their significance understandable to electricity consumers, and quantified where possible;
- A description of changes proposed where the information is not based on the Distribution Business's existing business;
- The basis on which significant assumptions have been prepared, including the principal sources of information from which they have been derived;
- The factors that may lead to a material difference between the prospective information disclosed and the corresponding actual information recorded in future disclosures;
- The assumptions made in relation to these sources of uncertainty and the potential effect of the uncertainty on the prospective information.

Regulation and Legislative Requirements

Existing external regulatory and legislative requirements are assumed to remain unchanged throughout the planning period. Thus the external drivers which influence reliability targets and design, environmental, health and safety standards and industry codes of practice are constant throughout the Asset Management Plan's period.

Network Growth

Network Demand has been flat since 2009 and kilowatt hour consumption has been declining at 1% per year. Previous Asset Management Plans have forecast both demand and kilowatt hour growth of between 1% and 1.5%. After further analysis of the network, consumer behaviour and other New Zealand network experiences, NEL has determined that the flat demand and declining kilowatt hour consumption trend will continue for the 10 year planning period.

There is, however, considerable uncertainty for NEL to determine an accurate growth forecast for this Asset Management Plan. Metering information is still showing a decline in consumption heading into the 2016 year. Peak demand, while flat, is potentially held up by less use of load control in the winter months. The real uncertainty comes from the mix of variables that has an influence on this being; weather, economy, shift to more energy efficient appliances, more appliances in households, change to more efficient heating options, subsidies for retrospective insulation installation and solar PV installations. The ongoing trend is uncertain and may well continue to decline. This complicates the Asset Management planning as growth has been a key part of the planning of the network.

Current consumption trends could change and it is prudent for Asset Management purposes that NEL, until such time as more evidence suggests, should consider growth rates will remain flat and be used for the 10 year planning period. The change from a "positive growth" to "flat" has meant \$2 million of growth related projects and some renewal related projects are being removed from the Asset Management Plan from 2014 to 2019.

Assets are replaced or upgraded based on a number of factors although a key factor is growth. There are three types of growth for the network; **Connections**, **Demand** and **Consumption**. The key type is Demand. This is typically the deciding factor on whether to replace an asset based on growth. The timing of the maximum demand is typically mid-morning during the peak of winter.

- **Connections** are the number of consumers connected to the network. Historically the growth rate of connections has been between 0.5% and 1.0%. It is anticipated that this trend will continue for the entire planning period. The current number of connections is approximately 9,200 so the Plan will allow for the lower end of the scale at 50 new connections a year.
- **Demand** is the increase in peak demand on the network. This typically occurs during the peak of winter during weekday mornings. The long term growth rate has typically between 1.0 % and 1.5% per year. Historical increases have been due more to consumers using more electrical appliances and switching to cleaner more efficient heating options. Since 2009 peak demand has flattened off and it is apparent that on a per consumer basis consumers are using more efficient appliances and less energy is being used on heating as a result of improved insulation and more efficient heating options. Current maximum demand is 33.3MW, which is down from the previous year of 34.1MW, maximum demand in 2009 was 33.5MW. The Plan assumes the peak demand growth rate remaining flat at 33.3MW for the planning period.
- **Consumption** is the number of kWh used. There is some connection between demand and consumption. The historical growth rate for consumption up to 2008 has been between 1.0% and 1.5%. Since then annual consumption has declined by 1.5% per year on average. For the purposes of asset management it is forecast for consumption to continue to decline at 2% for the 2016 year and then 1% for the rest of the planning period.

If there is a fundamental change from forecast in **connections, demand** and/or **consumption** then this could have an impact on the timing of the capital expenditure programme either by advancing projects or deferment. Given there is currently no forecast growth on the network, except for new connections, almost all growth related projects have already been deferred or removed from the next 10 year planning period. The asset replacement programme will, however, continue mostly unchanged as the predominant justification is age and condition. The major financial risk is if there is network growth and deferred projects have to be brought forward but this would not exceed 10% of the capital expenditure budget as any growth will unlikely be at the historical rates of 1% - 1.5%.

Expenditure Projections

All projections of expenditure are presented in New Zealand dollars as at the disclosure date of this Asset Management Plan. This includes the effect of exchange rates for overseas sourced equipment.

The Operational Expenditure, on an annual basis, has been relatively stable except for occasional targeted spending in topical areas eg; 2014 – Overhead Line Compliance and 2015 – Vulnerable Underground Cables. There has also been variance due to the availability of appropriate electrical or civil contractors to undertake the work. This Plan assumes there will be a smooth flow of work provided to electrical contractors who will have the appropriate staff to undertake the work in a timely manner.

It is also assumed that in the auditing process there will be 8% asset replacement from service box and link box audits based on the last two years audit/replacement results. It is assumed this percentage will reduce over time given NEL is completing its second cycle of audits meaning fewer assets should fail the condition assessment.

Any asset replacements due to growth have been deferred unless due to a known specific development. If, however, technology or consumer behaviour changes then this could result in a review and accelerate or delay some projects depending on the outcome.

Asset Condition

Another key assumption underpinning this Plan is the assumption of asset condition. Asset condition of overhead lines can be visually seen but 88% of the network is underground and so condition assessments are much more difficult and costly.

Given that NEL cannot dig and check cable condition everywhere, NEL has assumed that cable condition will be based on the age and type of cable unless it has been uncovered previously or there is fault history that supports a change on condition assessment. To date any site cable condition assessment has shown

condition to be better than assumed, but it can be expected that there will be areas where this may not be the case.

Load Control

NEL now primarily utilises load control to minimise transmission costs through minimising its contribution to the upper South Island peaks Regional Coincident Maximum Demand (RCPD). The 2016 year sees a change from the transmission charges being based on the average of the 12 largest peaks for the year to the average top 100 peaks. The implications are that load control will be used more extensively as the timing of the top 100 peaks could occur in the shoulder months of winter as well as summer. Load control is also an important tool to maximise the efficiency and performance of the network if required. NEL has a pricing structure that encourages the utilisation of controllable loads, the biggest being water heating. This Plan assumes that the consumer's utilisation of load control will continue for the planning period. Future developments in smart metering and more retailer control on load are issues which will be monitored. Currently the assessed benefit of load control is 3MW approximately 10% of total maximum demand.

Load Profiles

Grid Exit Point and 11kV feeder load profile patterns remain consistent with historical trends. The main time any change in pattern is an issue is during the coldest days of winter when NEL has its highest electricity consumption peaks. If the historical load patterns were to shift, then this could bring forward asset replacement or network upgrade works. Any load changes outside the winter months of June, July and August will not have any significant effect at all.

Embedded Generation

It is assumed that increasing levels of embedded generation will be commissioned during the planning period. With the improved economic viability of photo voltaic panels it is expected there will be a greater number of embedded generation sites in residential areas than in the previous five years. This will have a material impact on the Asset Management Plan in the longer term.

If the cost of technology continues to decrease further and photo voltaic embedded generation becomes even more viable, there could be large changes which could impact on future planning for the network and administering these connections would also become important from a safety perspective. Currently there are 73 sites with embedded generation on the network of which six are 10kW or more. NEL has implemented systems and procedures for new embedded generation connections and the ongoing management of existing connections from a safety management, operational and quality of supply perspective.

Potential issues identified:

- Over voltage;
- Inverters shutting down due to high voltage;
- Harmonics;
- Quality of electricity injected into network;
- Safety of network during outages (prevention of embedded generation injecting into network during a network fault).

There are also limits to the level of photo voltaic saturation that the existing network can support. NEL will monitor photo voltaic installations on its network and where network capital works become necessary to support incremental photo voltaic installation, then capital contributions may become necessary from consumers installing photo voltaic in line with the capital contributions policy.

It is assumed that the introduction of more photo voltaic embedded generation will not have any significant impact on the network peak demand. The peak demand times are in the winter months when cloud cover would significantly limit the effectiveness of solar panels and, as such, there would still be a high reliance on the distribution network to supply electricity during those peak demand times.

Any larger installations (diesel generators) will predominantly be installed for the benefit of the consumer in emergency situations but back-feeding into the network always needs to be considered. It is assumed

there would not be any embedded generation installed for the sole purpose of selling of electricity in the central Nelson City area.

Transmission

Transpower continues to provide sufficient capacity to meet NEL's requirements at the Stoke Grid Exit Point. Transpower completed its planned 33kV switchboard and transformer changes at Stoke during 2013. Nelson Electricity connected its fourth 33kV feeder to Stoke around the same time.

Consumers

Consumer expectation on reliability and quality of supply remains unchanged for the planning period. Most are happy with current quality and reliability and are unwilling to pay more for improvement.

Natural Disaster and Climate Change

It is assumed neither the NEL network nor the local transmission grid is exposed to a major natural disaster during the planning period. Any significant event of this nature will require a complete review of the asset management process. Priority and type of works could change significantly as a result.

It is also assumed the NEL network is exposed to normal climatic variation over the planning period including temperature, wind and rain variances consistent with experiences since 2000.

The Emergency Recovery Plan is used to cater to any major emergency event. This takes into consideration additional important learning from the Christchurch earthquakes and recent Civil Emergency's in the Nelson region during December 2011 and April 2014.

NEL Ownership

NEL ownership and management structure is maintained as is currently.

No changes are proposed to the existing business of NEL and, thus, all prospective information has been prepared consistent with the existing NEL business ownership and structure.

Local Government

Generally zoning for land use purposes remains unchanged during the planning period with the exception of special housing areas identified by Nelson City Council. The Council entered a Housing Accord with Government allowing aspects of the city's resource management plan to be bypassed. Three of these areas fall within the NEL network area which could create 160 new homes in a relatively short time frame.

The Nelson City Council application of the National Code of Practice for Utilities Access to the Transport Corridors does not increase costs to work in the Nelson city area but can have a significant impact on costs of digging in streets.

Inflation

Inflation has been assumed based on Statistics New Zealand NZIER forecasts. This is about as accurate as Nelson Electricity can obtain from outside sources. It is forecast to be within the 1.0% to 2.0% range. The expenditure plans are based on today's monetary value and inflation is not taken into account.

Interest Rates

Interest rates will remain around 3.0% and lift to 5.0% over the next few years. NEL will continue to pay off debt for the two major capital expenditure projects completed in 2013. Any increases above forecast will have an influence on the debt servicing costs. NEL will minimise this effect by entering into fixed interest rate arrangements where appropriate.

2.17 Capability to Deliver

Asset Management Plan Realistic and Achievable

NEL has developed the Asset Management Plan which has been fully reviewed and is now reasonably stable in nature and the works deriving from this Plan are undertaken in a sustainable manner principally using the resources available.

The objectives set can be achieved in the timeframes unless there is a need to review based on changed assumptions.

Organisation Structure and Process for Authorisation

Refer to Section 2.6 which describes the organisational structure and responsibilities and decision making accountabilities for NEL.

SECTION 3 - Assets Covered

3.1 Introduction

NEL has just over 9,200 connections in a concentrated area of 24 square kilometres. The area is of central Nelson city and includes most of the Port area, Port Hills, Victory Square, Hospital, Brook, Wood, Nelson East, Nelson South and the central business district. Refer to [Appendix B](#) for a map of the supply area.

There are approximately 318 kilometres of circuits and a total 11kV transformer capacity of 95MVA with a capacity utilisation of 35%.

Four feeders are installed from the Grid Exit Point to supply a single 33kV/11kV Zone Substation at Haven Road, Nelson. Part of the route to the Zone Substation is in aerial lines while the latter portion consists of underground cables (see [Appendix B](#)).

The four 33kV feeders are configured to supply three 33kV/11kV 16/24 MVA transformer banks. The 11kV is configured into three sections operated as a continuous bus with the capability to be sectionalised for operational or protection reasons.

NEL recognises its vulnerability with all supplies to the city passing through a single substation. There are two 11kV interconnection points between NEL's network and that of neighbouring Network Tasman at North Road and Vickerman Street. This enables approximately 4MW of load to be supplied from one network to the other when the necessity arises through extraordinary circumstances, depending on network demand at the time. Both existing interconnection points are connected to one Network Tasman Zone Substation which has two separate 33kV supplies.

Fourteen key 11kV feeders radiate from NEL's Zone Substation to strategically placed major 11kV switching stations located at the city's load centres. Most of these stations have radio communication links with the SCADA system at the Zone Substation, for remote alarm purposes. The major switching stations are all located within a radius of two kilometres of the Zone Substation. From these stations, a primarily ring-fed 11kV network reticulates the city via other 11kV switching stations and an extensively ring-fed 400V network providing supply at 400 and 230 volts (see [Appendix D](#)).

NEL supplies several major customers with capacities larger than 1MVA. The most notable are:

- Sealord's - fish processing factory with one connection;
- Port Nelson Limited - port facilities with many connections;
- Nelson Marlborough District Health Board - hospital with six connections;
- Nelson City Council - local government with many connections.

NEL owns a permanently mounted 80kVA generator on site to provide emergency power to the Zone Substation in the event of a total 33kV supply outage. NEL does not own any mobile generating plant.

The Nelson Marlborough District Health Board has increased the size of its existing emergency generators to two 1200kW diesel generators. These generators can be used in an emergency situation to operate and inject back into the network.

The Nelson City Council has a 400kVA generator at their central Trafalgar Street site and exporting onto the network would be possible if required but this needs to be addressed further with the Council.

NEL has a fibre link between its Zone Substation and Transpower's Grid Exit Point at Stoke for the purpose of monitoring load and for 33kV feeder protection.

NEL has a radio communication system between the Zone Substation and major 11kV switching stations to communicate OCB status and alarms on the SCADA. On receipt of an alarm from an out-station or from the 33kV/11kV system at the Zone Substation, a message is generated by the SCADA system and transmitted to NEL's call answering service, currently Call Care, or any other selected receiver.

3.2 Identification of Assets

Identification of Assets by Category

The assets of NEL have been grouped for ease of modelling by the Asset Performance Standard into:

- Sub-transmission Network;
- Zone Substation;
- Distribution Network;
- Distribution Substations and Transformers
- Distribution Switchgear
- LV Network;
- Other Network Assets (includes Communications and SCADA);
- Non-Network Assets

Sub-transmission Network

This group addresses all assets attached to the four 33kV feeders between the Grid Exit Point at Stoke and the 33kV terminals on the 33kV/11kV transformers at NEL's Zone Substation at Haven Road.

Zone Substation

This group covers the Zone Substation at Haven Road which includes all equipment within the substation including the building, 33kV/11kV transformers, 33kV and 11kV Switchgear, protection, generator. etc.

Distribution Network

The assets addressed in this group include all major assets between the 11kV bushings on the 33kV/11kV Zone Substation transformers and the 11kV bushings on the 11kV/400V distribution transformers throughout the network.

Distribution Substations and Transformers

This group covers the 11kV/400V distribution substation and transformers but excludes Distribution Switchgear.

Distribution Switchgear

This group covers the 11kV distribution switchgear throughout the network.

LV Network

This group addresses the assets in the network contained between the 11kV/400V transformer LV bushing and the customer network connection point.

Other Network Assets

This group includes all assets that are not included in the above categories ie; communications and SCADA.

Non-Network Assets

This group is for all assets that are not used for the direct operation of the network. These include vehicles and office equipment.

See [Appendix E](#) for Asset Quantities as disclosed in the 31 March 2015 Disclosure Schedule 9a and Regulatory Asset Base Value by Asset Category as disclosed in the 31 March 2015 Disclosure Schedule 4(vii).

3.3 Justification of Assets

Introduction

The selection of 33kV as the supply voltage into the Zone Substation is mainly an historical one which has been largely influenced by the availability of 33kV at the Stoke Grid Exit Point. Because of the density and small area covered by the NEL network, 11kV has served as a more than adequate secondary transmission voltage for the network. The operation of the network at both of the above voltages has ensured that system losses have been kept to acceptable levels. The configuration of the 11kV network has maintained a high quality and reliability of supply to the end user. The use of a 400V ring-feed network compliments the transmission voltages with enhanced reliability statistics. All assets are provided to meet regulatory voltage requirements under system peak loads while meeting security levels as mentioned in the next section.

Security

NEL assets are in place to provide a reliable power supply to its consumers. The new Zone Substation and four 33kV feeders have N-1 capability, therefore, with the exception of short lengths of 33kV cable there is no requirement for NEL to hold spares for these assets for the purpose of an enhanced security of supply.

There is also sufficient spare capacity within the 11kV network to provide N-1 security levels for a single event occurrence.

NEL has strategic emergency spares available to support repair or replacement of failed assets on the network.

Current practice with the NEL network is to plan to provide N-1 where practicable except for the rural and peripheral residential areas. However, this may be compromised in the future by the limitations on revenue as a result of price path regulation.

NEL will also provide alternative levels of supply security and price for customers who are prepared to enter into appropriate contracts. These areas still meet the Asset Performance Standard and current security level outlined below.

NEL - Current Security Level

Security Level	33kV Network	33kV Transformer	11kV Network	11kV/400V Transformer	400V Network
Urban large business and industrial	N-1	N-1	N-1*	N-1	N-1
Urban small business and residential	N-1	N-1	N-1*	N-1	N-1
Central business district	N-1	N-1	N-1*	N-1	N-1
Rural and peripheral urban residential	N-1	N-1	N*	N	N

***11kV Switchgear, Zone Substation Bus or Bus Coupler Fault** – NEL's 11kV Zone Substation bus meets N-1 criteria. The only exception at the 11kV level is in the event of a bus fault at a first out switching station. Security of Supply level is N, where it will take repair time. Repair time could be extended beyond six hours depending on the severity of fault.

N-1 means that supply to all consumers affected by a single failure event shall be restored by means of switching only (ie; no replacement of in-service equipment).

N means that supply may be restored to consumers affected by a failure event by either replacement or the repair of in-service equipment.

The criteria used to develop the Asset Performance Standards reflect asset performance levels that can be obtained by the N-1 methodology.

Optimisation

NEL gathers data from the network by way of:

- Annual Load Survey;
- Network Asset Auditing;
- Planned Preventive Maintenance;
- Network Load and Temperature Logging.

This information is analysed for the purposes of optimisation and redundancy by:

- Asset Performance Modelling;
- Operational Management System;
- ODV Analysis.

Where NEL identifies assets installed on the network that provide a security and capacity level higher than either the Asset Performance Standards required or customers have specifically contracted for and are deemed as unnecessary or excessive as opportunities arise, NEL either removes these assets from service or downsizes the asset.

3.4 Location, Age and Condition of Assets

Categories

The graph and table below give an indication as to the regulatory asset base value by asset category and average ages.



The total replacement cost above is derived from the ODV process. The actual replacement cost, if based on historical cost, would be significantly higher. This demonstrates the inadequacy of the ODV process in reflecting the true costs of networks.

Assets by Age


Asset Category	Average Install Date
Zone Substation	2014
Sub-transmission Network	1998
Distribution Network	1985
Distribution Substations	1990
Distribution Transformers	1984
LV Network	1983

Asset Age Profiles


The profiles below are taken from data in the 31 March 2015 Information Disclosure. The graphs show that the network is 88% underground and has an overall average age of approximately 29 years. The condition of these assets is detailed in the asset maintenance section. The age distribution graphs demonstrate that the majority of assets were installed in the 1960s–1980s. The 1990s was a period of minimal change without many new assets being installed on the network. During the 2000–2010 periods there were more asset replacements with some of the aged assets, especially 11kV switches and transformers, beginning to be replaced as well as investments due to growth.

The 2016-2026 periods will continue to see the increase in the rate of asset replacements as they reach the end of their useful life. Projects scheduled are the replacement of 11kV cables that will provide a secure backup ring around the network. These projects will also replace older assets with assets of higher capacity looking at the longer term.


33kV Network Age Distribution

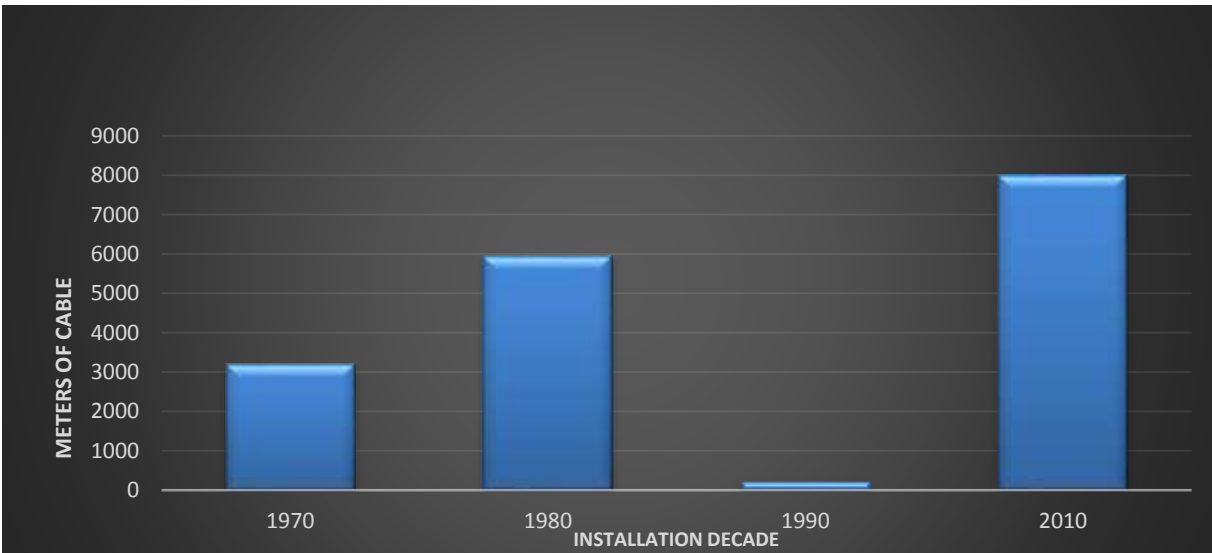


11kV/400V Substation Age Distribution

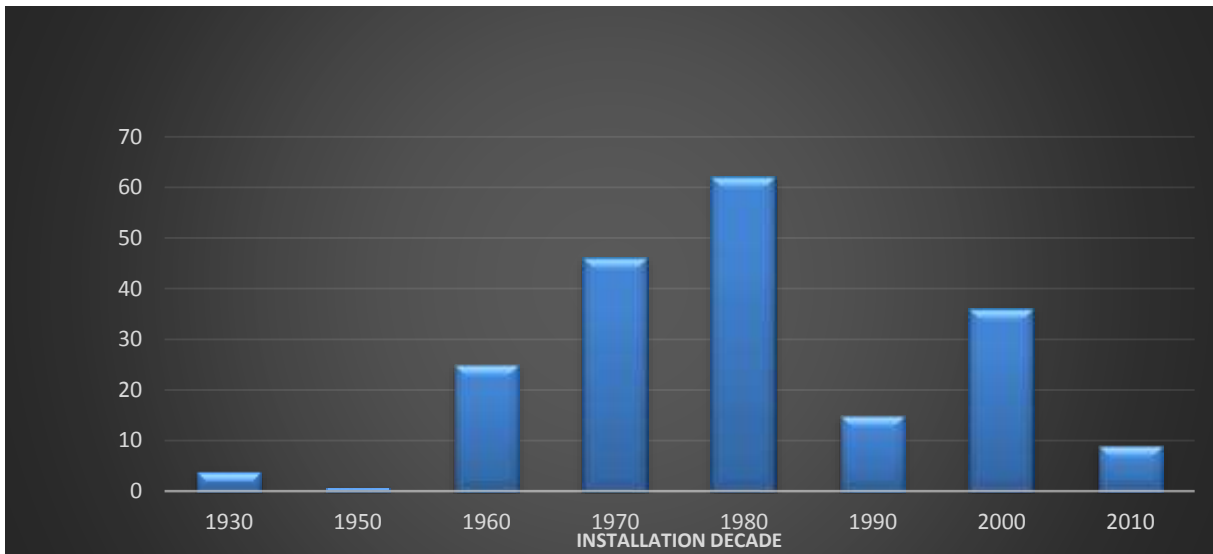


11kV Network Age Distribution

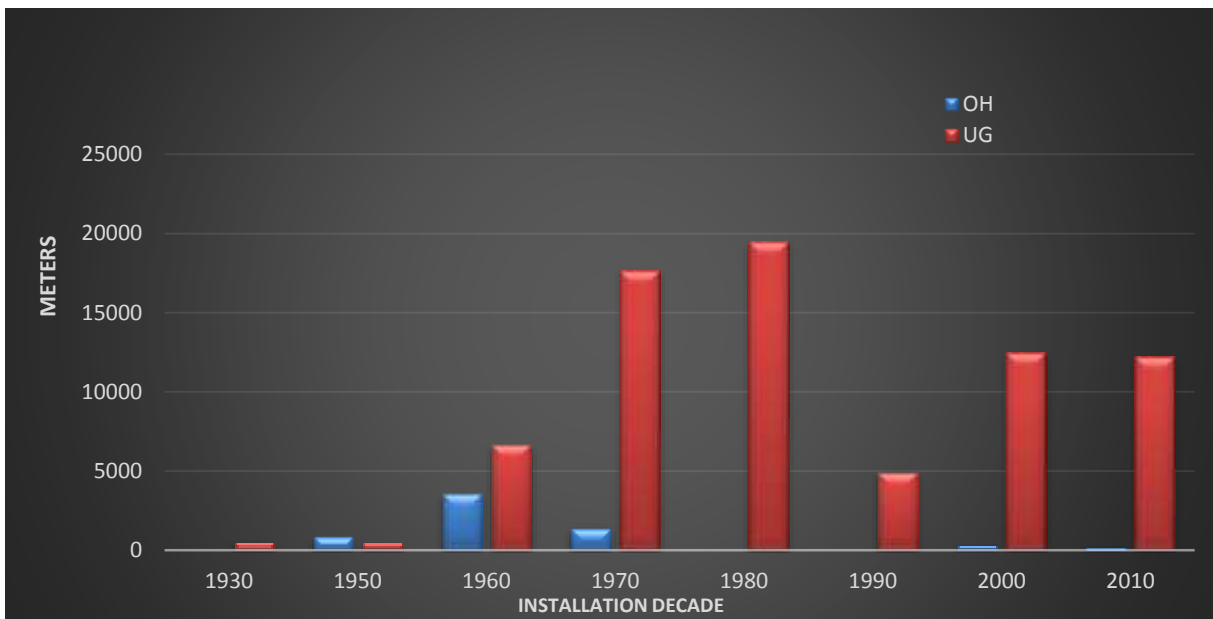


400V Network Age Distribution

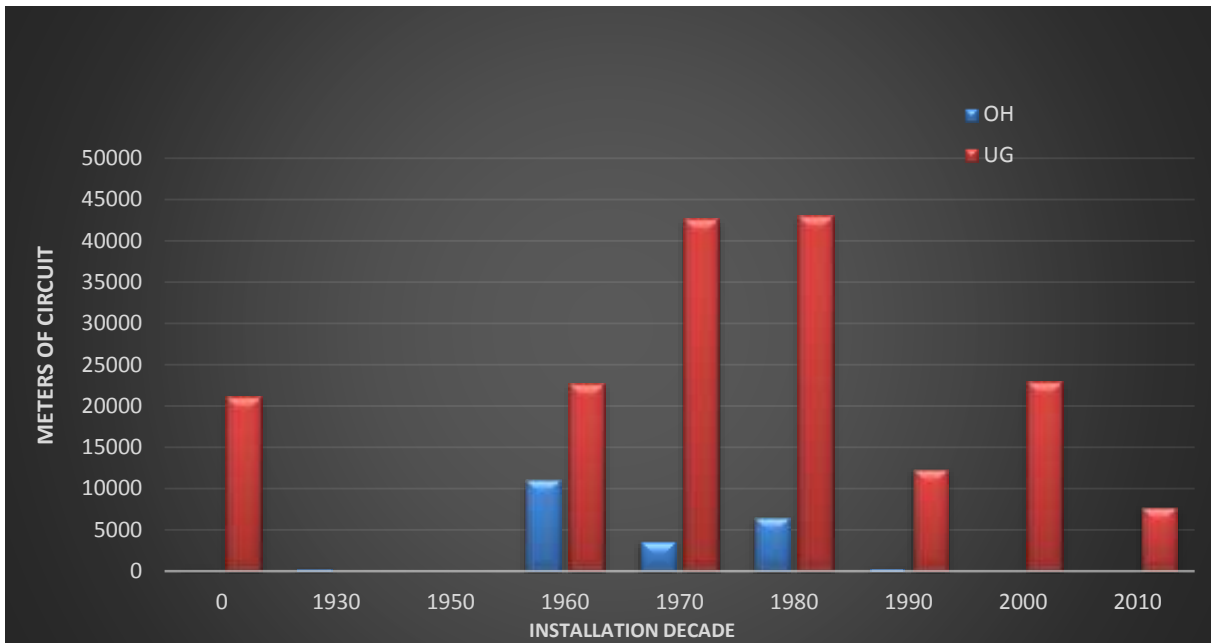

11kV/400V Transformer Age Profile

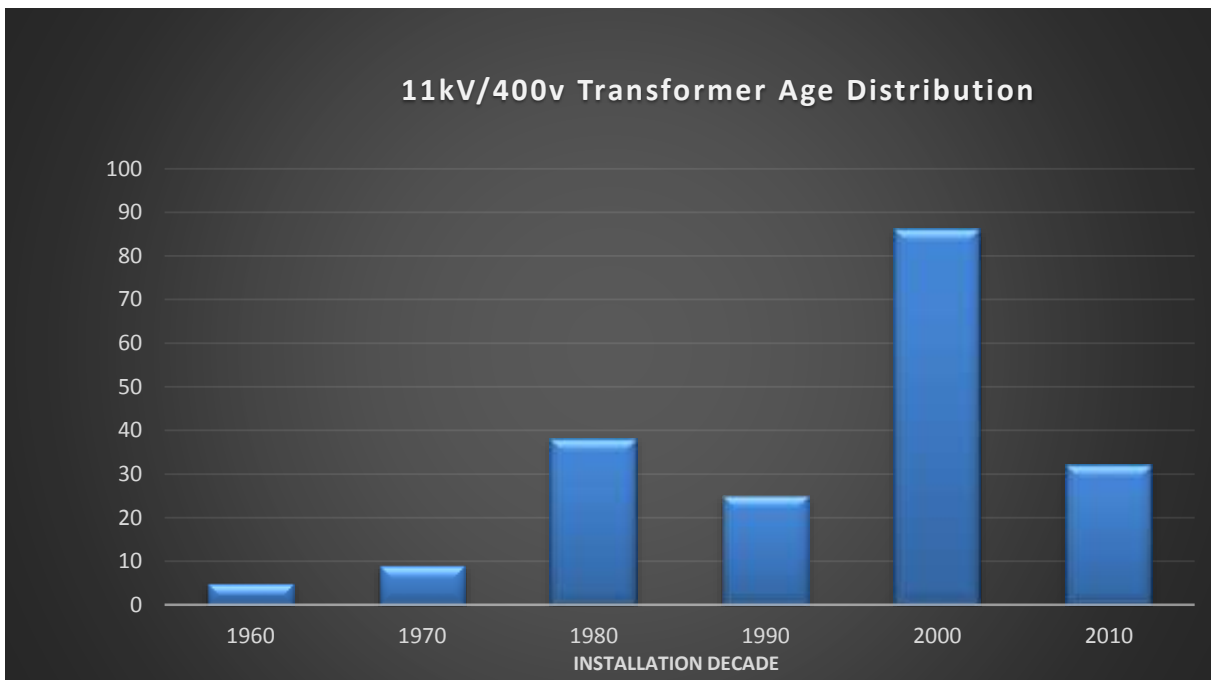

11kV Switch Age Profile

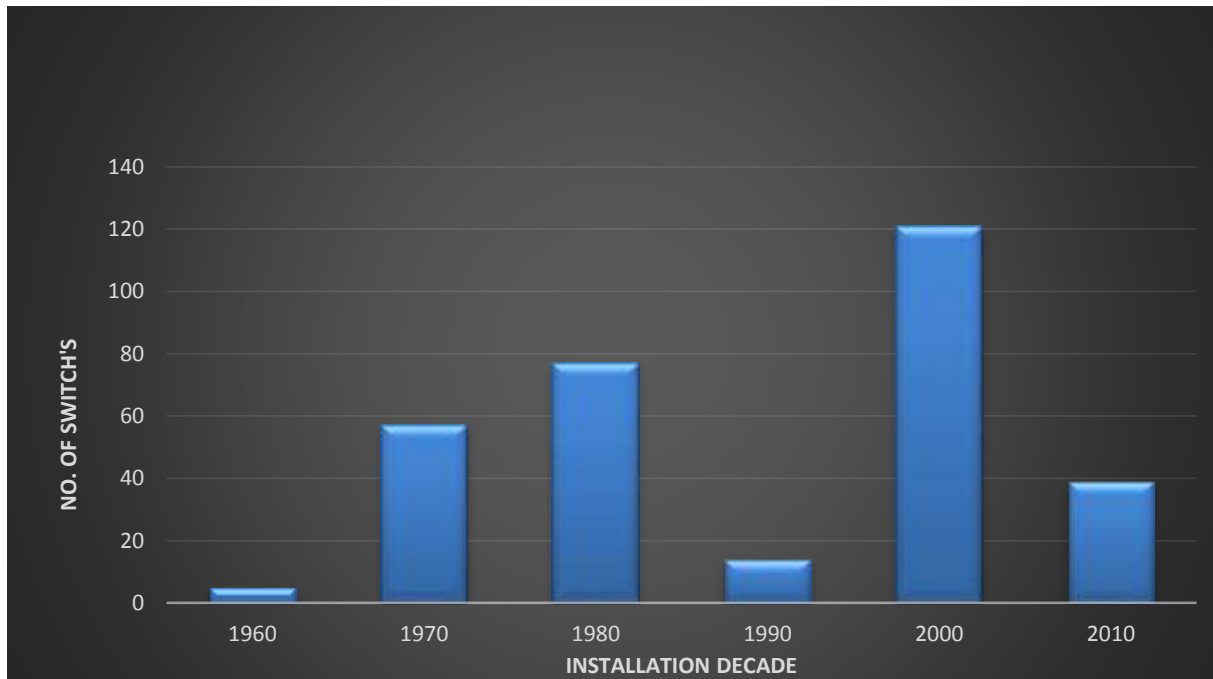

The Auditing Programme and associated risk modelling results identify areas of the network that will require maintenance at various times in the future. The location and the age of assets are held in computer databases and AutoCad files. These files are supplemented by office plans, field books and on photographs. The GIS amalgamates all asset information into an easy use, information analysis and retrieval system.

3.5 Asset Replacement

NEL has an Asset Replacement Guide to aide in the determination of the appropriate time to replace an asset. This guide covers all asset types on the network.

NELSON ELECTRICITY - ASSET REPLACEMENT GUIDE				
Asset Type	Replacement Priority			
	1 - Safety	2 - Technical	3 - Condition	4 - Age
33kV Supply				
Cables	Depth Public Risk	Load growth	Partial discharge tests Cable inspection Cable fault history	XLPE Cable - 50 years PI Cable - 77 years
Overhead Line	Public Risk	Load growth	Partial discharge tests Thermal imaging	Continually maintained
Zone Substation				
Transformers	Fault issue identified	Load growth Lack of spares Noise	Oil Test Thermal imaging Physical Inspection	66 years
33kV OCB	Fault issue identified	Lack of spares	Oil Test Thermal imaging Physical Inspection Partial discharge tests	44 years
11kV Switchboard	Fault Issue Identified	Lack of spares Load growth Potential fault levels	Oil test Physical Inspection Partial discharge tests	50 years
11kV Network				
Cables	Electromagnetic field Depth Public Risk	Load growth	Partial discharge tests Cable inspection Cable fault history	XLPE Cable - 50 years PI Cable - 77 years
Overhead Line	Electromagnetic field Public Risk	Load growth	Partial discharge tests Thermal imaging	Continually maintained
Distribution Substations				
Transformers	Fault issue identified	Load growth Lack of spares Noise	Oil Test Thermal imaging Physical Inspection	60 years
11kV switches	Fault issue identified	Lack of spares	Oil Test Thermal imaging Physical Inspection Partial discharge tests	44 years
400V Switchboard	Touchproof Fault issue identified	Load growth	Thermal imaging Physical Inspection	44 years
400V Network				
Cables	Depth Public Risk	Load growth	Cable inspection Cable fault history	XLPE/PVC Cable - 55 years PI Cable - 77 years
Overhead Line	Public Risk	Load growth	Thermal imaging	Continually maintained
Service Box/Link Box				
	Location Risk Touch Proof issue Earthing	Load growth Condition assessment	Physical inspection	50 years

Primary Assets

NEL is at the beginning of a wave of asset replacements. The previous section demonstrated the age profile of assets. Some of these assets are now approaching the end of their life span. There will be an ongoing programme to replace these aged assets.




As indicated in this extrapolated graph, significant asset replacement costs are predicted over the next 70 years. The replacement periods are based on the standard physical asset lives as outlined in the Electricity Distribution Services Input Methodologies Determination 2012 and values are based on the Regulatory Asset Base valuation for the various types of network assets. This will require more investment into the network on top of the natural growth that is occurring. Because of an ongoing maintenance cycle and testing programme the standard service lives of assets such as transformers and details of the condition assessment of assets is detailed in Section 6.4 of this document. In broad terms, all asset types are audited or tested on a regular cycle and from the results of that audit a maintenance or replacement programme is formed.




As an example of this programme in action, all aged Long & Crawford HV oil switches on the network were replaced during 2005/06. Similarly an aging HV cable into the central business district was replaced during 2005/06 and other circuits will continue to be upgraded in the coming years. There are many other HV cables nearing the end of their service life in the coming years. These will be partial discharge tested and potholed on to determine whether they are in a condition that will last beyond the standard physical asset life.

Standard Physical Asset Life Table

(Electricity Distribution Services Input Methodology Determination 2012)

Asset Type	Standard Life (Years)
Transformers	45
HV Switches	40
Sub-transmission Cables – XLPE (Pre 1985/Post 1985)	45/55
Sub-transmission Cables - PILC	70
Distribution Cables – XLPE (Pre 1985/Post 1985)	45/55
Distribution Cables - PILC	70
Distribution Lines - Wood	45
Distribution Lines - Concrete	60
LV Cables – XLPE (Pre 1985/Post 1985)	45/55
LV Cables - PILC	70
LV Lines - Wood	45
LV Lines - Concrete	60

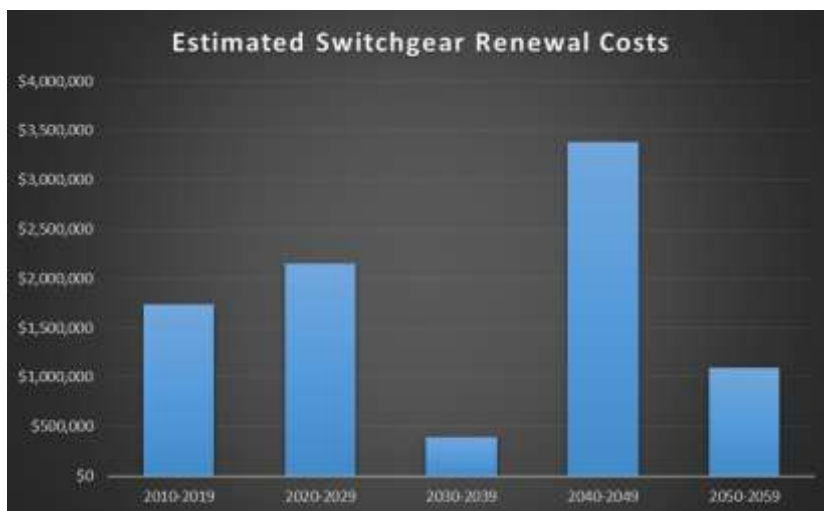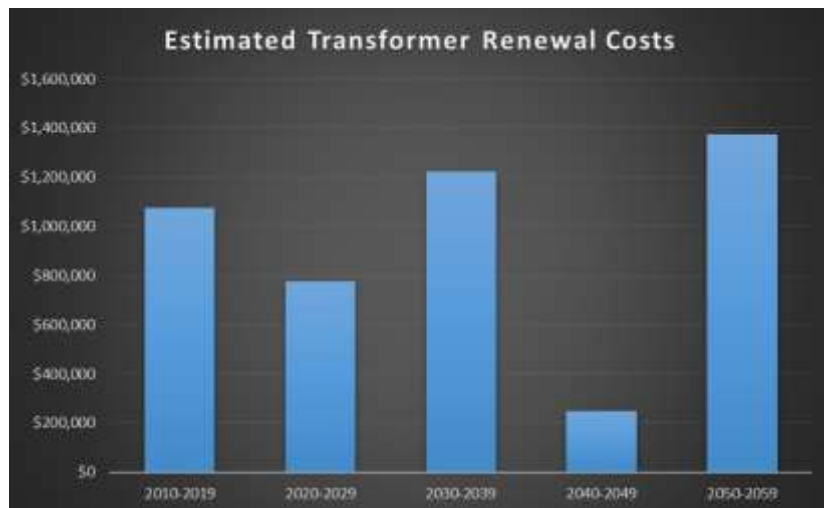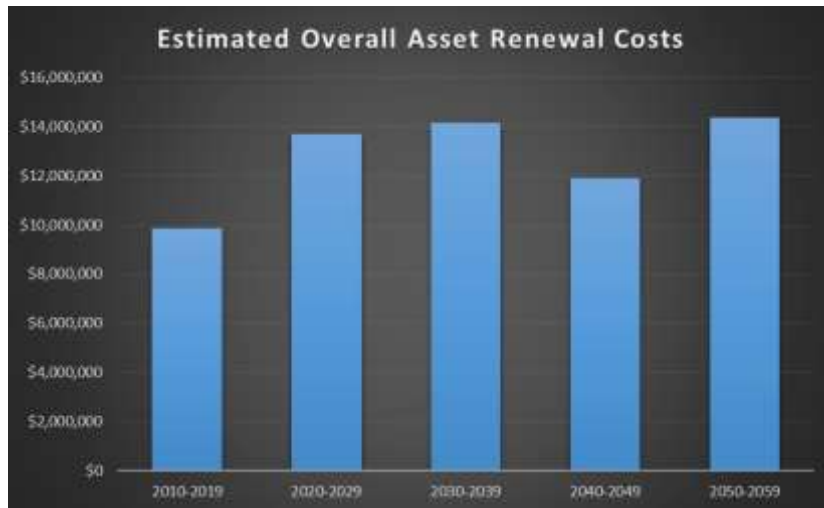

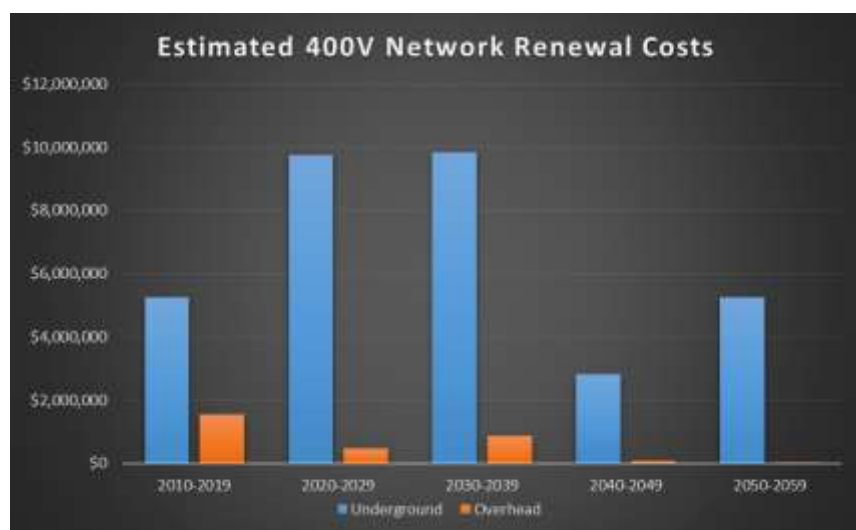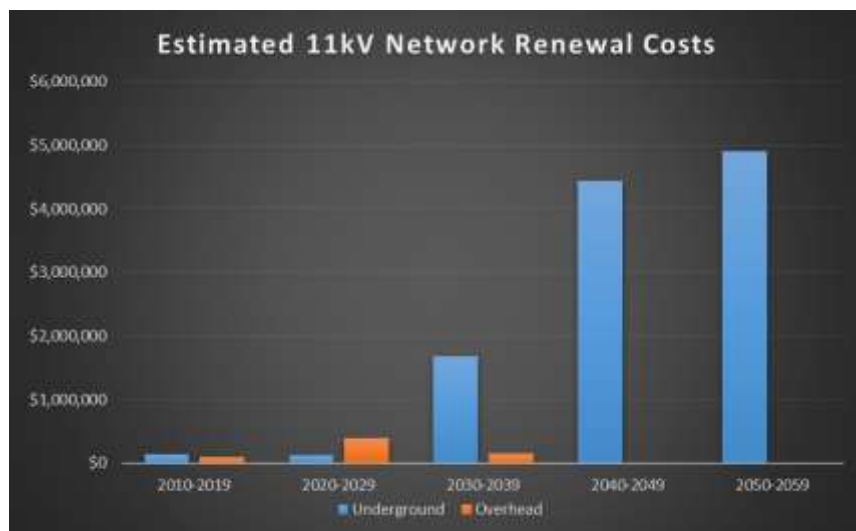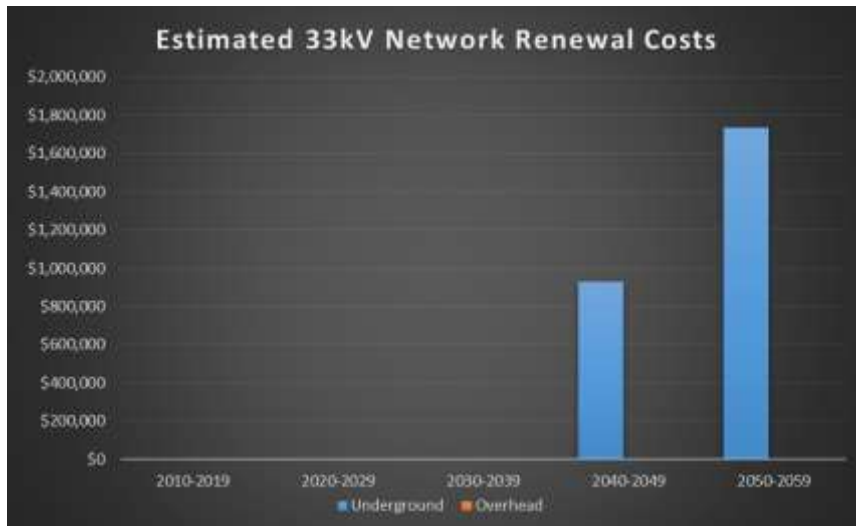

Secondary Assets

Also of significant importance to the operation of the network are Secondary Assets such as buildings, SCADA, Ripple Generators and Switchyards. These assets are also audited on a regular basis and, where required, maintenance or replacements are scheduled. The overlay to the life cycle of these assets is based on the standard physical asset lives as outlined in the Electricity Distribution Services Input Methodologies Determination 2012.

Standard ODV Asset Life Table

Asset Type	Standard Life (Years)
Ripple Injection Plant	20
SCADA	15
Switchyard Structure - Concrete	60
Buildings	70

Ripple Injection Plant – The two rotating ripple generators were replaced with a single static ripple injection system in the 2014-2015 financial year.

SCADA – The present system is less than five years old and being gradually extended to provide more feedback from the network operations.

Switchyard – The 33kV outdoor switchyard was replaced with a new indoor Zone Substation at Haven Road in 2014.

Buildings – The oldest of the existing buildings was constructed in the 1950s and are generally in sound condition. Additional earthquake bracing was installed in 2009.

3.6 Non-Asset Solutions

Evaluation of appropriate non-asset solutions is a key strategy in the deferment, minimization or elimination of capital and maintenance spend otherwise required in the acquisition of assets for maintaining, reinforcing or extending the existing network.

The objectives of this policy statement are to ensure:

- Integration of non-asset options in long term asset development planning;
- Evaluation of non-asset options in the day to day implementation of network operations;
- That the non-asset solutions contribute to the achievement of Key Performance Indicators.

Application of the above criteria reinforces a discipline in lateral thinking and enhances the end objective of a best-cost solution for network investment decisions by the network management team and company directors.

NEL assesses non-asset solutions on a case by case basis. Many of the options introduced are within the network but there are some that include consumer involvement. Given the network is dense urban, there is limited opportunity for some solutions like distributed generation.

The following solutions have been implemented and continue to be reviewed as an option for the future:

- **Load control is used to reduce demand peaks.** This is being used to not only minimise transmission costs but also to maximise the utilisation of existing assets and deferring the need for asset replacement. It is also used through differential pricing to provide incentives for consumers to minimise peak demand loads which can remove the need for consumer capacity upgrades or provide additional spare capacity to be used elsewhere. Load control has been used in

New Zealand extensively and still proves the most cost effective way to manage electricity peaks at a distribution network level.

- **The introduction of power factor pricing** has encouraged larger consumers to improve power factor on their sites further increasing the performance of not only their supply but also the NEL network. Power factor charges have been implemented into the line charges for Time of Use consumers to encourage large consumers with poor power factor to improve, thus improving the performance of the network and potentially delaying some infrastructure upgrades.
- **Demand Side Management**. In addition to load control, NEL has agreements in place with select major consumers in the event of a major outage during peak winter times to minimise/reduce load. This provides additional capability to maintain supply to the entire NEL network. This non-network solution has been used to minimise the overall network peak or constraint but consideration for this option for internal network constraint is also an option but it is likely there will be limited opportunity. Given this is a contractual situation it is not considered a viable long term solution.
- **Some capacity upgrades have also been deferred by load shifting across the network**. Some as simple as shifting breakpoints on the HV or LV system depending on where the potential constraint is. This option is looked at on an annual basis by balancing load across transformers or 11kV feeder catchments. This has proven to be effective to ensure the N-1 security of supply standard is maintained on the 11kV network.

Non-network opportunities will continue to be looked at as an alternative to investment in the network.

3.7 Distributed Generation

NEL recognises the value of distributed generation in the following ways:

- Reduction of peak demand at Transpower Grid Exit Points (only if used for generation at peak times);
- Reducing the effect of existing network constraints;
- Avoiding investment in additional network capacity;
- Contributing to supply security;
- Making better use of local primary energy resources thereby avoiding line losses;
- Decreased line losses through smaller generation closer to load;
- Avoiding the environmental impact associated with large scale power generation.

NEL also recognises that distributed generation can have the following undesirable effects:

- Increased fault levels requiring protection and switchgear upgrades;
- Potential stranding of assets, or at least part of an asset's capacity, if significant levels of generation are installed.

Despite the potential undesirable effects, NEL will facilitate the development of distributed generation that will benefit both the generator and NEL.

3.8 Environmental Considerations

Consideration for any distributed generation option must be given to any environmental impacts in the area ie; noise, air pollution, visual impacts.

3.9 Connection Terms and Conditions (Commercial)

- Connection of distributed generation up to 10kW to an existing connection will not incur any additional line charges. Connection of distributed generation greater than 10kW to an existing connection may incur additional costs to reflect network reinforcement, which can be either on a full, up-front basis or over time. Costs charged under either method are likely to be capped by Regulation.
- Distributed generation that requires a new connection to the network will be charged a standard connection fee and may also be charged a fee to reflect reinforcement of the network back to the next transformation point.
- An annual administration fee will be payable by the connecting party to NEL.
- Installation of suitable metering (refer to technical standards below) shall be at the expense of the distributed generator and its associated energy retailer.
- NEL is happy to recognise and share the benefits of distributed generation in reducing its own costs (such as transmission costs or deferred investment in the network) provided the distributed generation is of sufficient size to provide real benefits.
- Those wishing to connect distributed generation must satisfy NEL that a contractual arrangement with a suitable party is in place to consume all injected energy.

3.10 Safety Standards

- A party connecting distributed generation must comply with any and all safety requirements promulgated by NEL.
- NEL reserves the right to physically disconnect any distributed generation that does not comply with such requirements.

3.11 Technical Standards

- Metering capable of recording both imported and exported energy must be installed. If the owner of the distributed generation wishes to share in any benefits accruing to NEL, such metering may need to be half-hourly.
- NEL may require a distributed generator of greater than 10kW to demonstrate that operation of the distributed generation will not interfere with operational aspects of the network, particularly such aspects as protection and control.
- All connection assets must be designed and constructed to technical standards not dissimilar to NEL's prevailing asset management standards.

3.12 Re-deployment and Upgrade of Existing Assets

NEL has a policy of re-deploying assets into functions matching each assets dimension. In particular, NEL re-deploys distribution transformers to better match rating with maximum demand.

3.13 Acquisition of New Assets

The acquisition of assets (materials, equipment or apparatus) for network expansion, renewal or maintenance requires careful optimization of capital resources. To optimize the investment decisions, formal evaluation criteria shall be used that applies dollar values to a standard formula or framework. The basis of, and the ground rules for these assumptions, require definition and valuation within an appropriate financial model.

The economic evaluation process will enable full consideration of conventional and nebulous economic factors which are often difficult to place a dollar value on. For example, quality, reliability, life, costs of non-supply, customer impacts, SAIDI, risks liability (such as wind return periods, likelihood of a given incident occurring, etc). The results will be output to standardized formats evaluating net present value and economic value added for capital and maintenance investments.

This policy is supported by life cycle costing models for inclusion in the overall economic evaluation process, which considers the following issues:

- Remaining life strategies for aging network equipment;
- New equipment total life cycle costs as part of materials procurement;
- New technology;
- Project tender evaluations.

Application of the above criteria reinforces a discipline in lateral thinking and enhances the end objective of a best-cost solution for network investment decisions by the network management team and company directors.

3.14 Adoption of New Technology

Because NEL is a very small business and because of the Commerce Commission's revenue constraints, NEL seeks to avoid the exposure of adopting leading edge technologies, preferring instead to adopt only proven technologies that are used by other network utilities for vendor support to be maintained in New Zealand. Where appropriate, NEL takes advantage of the advice and recommendations from its shareholders Network Tasman and Marlborough Lines with regard to the asset type selection.

3.15 Disposal of Existing Assets

Assets deemed unsuitable for redeployment on the basis of condition, capacity or technology will be disposed of in an environmentally sensitive manner.

SECTION 4 - Service Levels

4.1 Reliability and Performance

NEL's goal is to have a network reliability and performance consistent with other networks of similar kind in New Zealand while also meeting consumer expectation.

The aim is for continual improvement of network reliability and performance even with the restrictions and limitations of a regulated environment. NEL has selected target levels which it believes are acceptable for the size of the network.

Consultation through a recent customer survey indicates that the present service levels are acceptable and that changes to charges to improve the level are not seen as necessary. All stakeholder interests in reliability versus the costs to improve the reliability of the network - the Unplanned Target - is reviewed annually and altered accordingly.

The NEL network is dense urban and predominantly underground. Fault response times are set and monitored utilising a fault response contract with a service provider for the network. Fault diagnosis and restoration is minimised due to the meshed type 11kV and 400V system allowing for back-feeding of areas affected by a fault. The performance levels are set taking this into account.

Although the NEL service levels are acceptable this can be expected to decline unless replacement of aging assets and maintenance levels continue. NEL will seek to do this within any pricing limitations imposed by the Commerce Commission.

Reliability and performance are gauged by the following standard industry measures.

NOTE 1: The forecasted figures do not include Transpower related interruptions as NEL does not have any influence over them.

NOTE 2: Year end is 31 March 2015 for "actual" figures and 31 March 2016 for "forecast" figures.

It will be noted that the actual figures for planned interruptions (Class B) has been significantly lower than the target figures in 2015. This was while the focus was on completing the 33kV Zone Substation replacement and the installation of a fourth 33kV feeder from Transpower's Stoke Substation. Together this has resulted in an improved overall SAIDI performance. The years 2012-2014 were typically normal and the forecast from 2017 onward are expected to be closer to target with regard to the planned interruptions undertaken.

Justification for Target Levels of Service

NEL has extremely high levels of reliability compared to the industry, but considers them to be in line with other networks of similar kind. The network is dense urban and predominantly underground. As such there is an expectation of high reliability. Most networks in New Zealand have a significant proportion of rural overhead lines and so it is difficult to directly compare network reliability statistics.

NEL believes the levels, as outlined, are a fair measure when compared to the dense urban portions of networks throughout New Zealand as these areas typically have more back-feed options, more automation and are closer to where the fault staff are based. NEL does constantly review its target figures based on network performance over recent years whilst taking into account extreme events and any particular planned projects that may have unduly distorted annual figures.

The average SAIDI figures for the last six years of operation show that the Planned Interruptions (Class B) were 5.4 and the Unplanned Interruptions (Class C) were 40.2. Both average figures have been influenced by significant events and projects therefore, it is believed that the Class B target of 15.00 and Class C target of 30.00 are not unreasonable.

The average NEL SAIFI Class C figure for the last six years was 0.54 and the NEL Target is 0.6 and so the target is achievable. The combined Class B and C target is 0.9 which is well below the industry average for 2015 which was 2.2.

The long term average overall NEL CAIDI figure for the last six years was 76.64, which does not meet the NEL target of 50 minutes. However, on further analysis it was noted that the target figure has been achieved in the last three years with the average over that period being 35.66 highlighting the benefit of the major investment in recent years.

Consumer surveys indicate that they are mostly happy with current reliability and do not want to pay more for increased reliability and conversely do not want to pay less for a less reliable supply. These findings have to be tempered by the fact that consumers do not differentiate between retailer, electricity networks or transmission. To them a power outage is a power outage.

We believe that the target levels of service generally satisfy both the consumer expectation and the comparison of dense urban parts of other networks.

Continual Improvement

NEL aims to continually improve the Asset Performance Standards with assistance from:

- Shareholders;
- Energy traders;
- Major customers;
- Other stakeholders.

A full description of Asset Performance Standards is covered in section 7.5.

In the Standard Use of System Agreement the supply to the consumer's point of supply will only be interrupted intentionally for reasons of:

- Planned outages;
- Inspections, maintenance or alterations;
- Safety;
- Protection of NEL's or other networks;
- Protection of the consumers quality of supply;
- Transpower instruction;
- Providing remote signal services;
- Response to an event of Force Majeure.

Where supply to the consumer's point of supply is to be interrupted NEL shall:

- Where possible, give seven days' notice to retail companies for planned shutdowns;
- Advise the energy trader of the duration time and consumer affected in the event of unplanned outages;
- Consult with the energy trader where Transpower requests an interruption;
- Act in accordance with good industry practice at all times.

The Use of System Agreement requires that the consumer's equipment or demand does not interfere with the supply to other network users.

NEL has a target of supplying all consumers with a quality of supply that meets or exceeds the standards set in the Electricity Regulations and in other industry codes of practice and, furthermore, will provide alternative levels of supply, quality and price for customers who are prepared to enter into commercial contracts. Measures of quality of supply are voltage magnitude, harmonic level and interference.

During times of peak loading in winter voltage checks are made throughout the network at substations and end of line boxes and poles. Data gathered is entered into the Office Management System, the results analysed and identified problems are rectified.

The likelihood of a new connection to the network causing interference to other users is assessed at the time of application. Guidelines, which address harmonics and interference, are contained in the NEL Network Code. Harmonics and interference are typically reported by the consumer, resulting in testing and recordings being made at the consumer's premise and on the network.

4.2 SAIDI - System Average Interruption Duration Index

SAIDI is the measure of the number of minutes that a customer on the network is without power per year. The formula is outlined below.

$$\frac{\text{Sum of [No. of Interrupted Consumers x Interruption Duration]}}{\text{Total Number of Connected Consumers}}$$

Over the last five years the NEL network has had an average of 40 minutes interruption of supply per consumer per year. It should be noted that one outage has a significant impact on the SAIDI minutes given the size of the NEL network. The industry average for 2015 was 338.

NOTE: As the year end 31 March 2016 is not complete, a 2016 forecast figure has been entered into the following tables.

SAIDI

	Year End	Transpower Planned	Transpower Unplanned	Transpower Total	NEL Planned	NEL Unplanned	NEL Total	Overall SAIDI
Actual	2003	0.00	0.00	0.00	27.00	72.00	99.00	99.00
Actual	2004	0.00	0.00	0.00	7.00	46.00	53.00	53.00
Actual	2005	0.00	0.00	0.00	12.00	39.00	51.00	51.00
Actual	2006	0.00	101.00	101.00	12.00	10.00	22.00	123.00
Actual	2007	0.00	215.00	215.00	9.00	16.00	25.00	240.00
Actual	2008	0.00	0.00	0.00	5.00	12.00	17.00	17.00
Actual	2009	0.00	70.00	70.00	29.00	87.00	116.00	186.00
Actual	2010	0.00	90.00	90.00	54.00	25.00	79.00	169.00
Actual	2011	0.00	0.00	0.00	9.00	106.00	115.00	115.00
Actual	2012	0.00	0.00	0.00	9.00	54.00	63.00	63.00
Actual	2013	0.00	0.00	0.00	10.24	34.00	44.24	44.24
Actual	2014	0.00	39.59	39.59	1.77	20.61	22.38	61.97
Actual	2015	0.00	0.00	0.00	2.55	17.39	19.94	19.94
FORECAST	2016	0.00	0.00	0.00	0.57	10.37	10.94	10.94
Future Target	2017	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2018	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2019	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2020	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Industry 2015 Average								338



The targets forecasted are at an achievable level given the predominantly dense urban network. The issue with this measure is that one fault can have a significant impact on results. The network development undertaken in recent years will help to reduce the impact of a single fault and make these targets achievable.

4.3 SAIFI - System Average Interruption Frequency Index

SAIFI is the average number of interruptions of supply that a consumer experiences per year. The formula is outlined below.

$$\frac{\text{Sum of [No. of Interrupted Consumers]}}{\text{Total Number of Connected Consumers}}$$

The NEL network has had an average of 0.99 interruptions of supply per consumer over the past five years. The industry average for 2015 was 2.2. This is slightly above the target of 0.9, however, the actual figures have been significantly affected by the new Zone Substation project and the requirement for short duration outages to transfer the entire network onto this asset. The completion of this project and the improved security of supply will result in the actual SAIFI figures returning to below target.

SAIFI

	Year End	Transpower Planned	Transpower Unplanned	Transpower Total	NEL Planned	NEL Unplanned	NEL Total	Overall SAIFI
Actual	2003	0.00	0.00	0.00	0.16	1.27	1.43	1.43
Actual	2004	0.00	0.00	0.00	0.28	0.47	0.75	0.75
Actual	2005	0.00	0.00	0.00	0.09	0.75	0.84	0.84
Actual	2006	0.00	1.99	1.99	0.08	0.16	0.24	2.24
Actual	2007	0.00	1.99	1.99	0.06	0.21	0.28	2.26
Actual	2008	0.00	0.00	0.00	0.03	0.15	0.18	0.18
Actual	2009	0.00	1.00	1.00	0.20	1.70	1.90	2.90
Actual	2010	0.00	1.00	1.00	0.18	0.58	0.76	1.76
Actual	2011	0.00	0.00	0.00	0.042	0.54	0.58	0.58
Actual	2012	0.00	0.00	0.00	0.05	1.05	1.1	1.1
Actual	2013	0.00	0.00	0.00	0.05	0.51	0.56	0.56
Actual	2014	0.00	1.00	0.00	0.21	0.29	0.5	1.50
Actual	2015	0.00	0.00	0.00	0.90	0.67	1.57	1.57
FORECAST	2016	0.00	0.00	0.00	0.002	0.20	0.202	0.202
Future Target	2017	0.00	0.00	0.00	0.30	0.60	0.90	0.90
Future Target	2018	0.00	0.00	0.00	0.30	0.60	0.90	0.90
Future Target	2019	0.00	0.00	0.00	0.30	0.60	0.90	0.90
Future Target	2020	0.00	0.00	0.00	0.30	0.60	0.90	0.90
Industry 2015 Average								2.20

NEL has a low number of faults on the network due to the high proportion being underground cabling. In past years a 33kV feeder fault would severely impact on numbers of consumers affected. With this risk alleviated due to the fourth 33kV feeder and the new Zone Substation, NEL should be able to maintain a SAIFI below 0.9.

4.4 CAIDI - Customer Average Interruption Duration Index


CAIDI is the average duration of an interruption of supply for consumers who experienced an interruption of supply in a year. The formula is outlined below.

$$\frac{\text{Sum of [No. of Interrupted Consumers x Interruption Duration]}}{\text{Sum of [Number of Interrupted Consumers]}}$$

The NEL network had average interruption duration of 49 minutes over the last five years. The industry average was 153.00 for 2015.

CAIDI

	Year End	Transpower Planned	Transpower Unplanned	Transpower Total	NEL Planned	NEL Unplanned	NEL Total	Overall CAIDI
Actual	2003	0.00	0.00	0.00	171.10	56.90	69.80	69.80
Actual	2004	0.00	0.00	0.00	23.40	99.40	70.80	70.80
Actual	2005	0.00	0.00	0.00	135.40	51.70	60.40	60.40
Actual	2006	0.00	50.20	50.20	161.00	61.90	93.30	54.80
Actual	2007	0.00	107.36	107.36	158.45	77.06	94.60	105.80
Actual	2008	0.00	0.00	0.00	159.00	79.00	91.80	91.80
Actual	2009	0.00	70.00	70.00	134.00	52.00	61.00	64.00
Actual	2010	0.00	90.00	90.00	300.00	43.00	104.00	96.00
Actual	2011	0.00	0.00	0.00	214.00	197.00	198.00	198.00
Actual	2012	0.00	0.00	0.00	201	51.00	58.00	58.00
Actual	2013	0.00	0.00	0.00	213.00	65.00	78.00	78.00
Actual	2014	0.00	39.57	39.57	8.59	70.34	44.88	41.34
Actual	2015	0.00	0.00	0.00	2.82	25.98	12.68	12.68
FORECAST	2016	0.00	0.00	0.00	371.00	50.74	53.11	53.11
Future Target	2017	0.00	0.00	0.00	50.00	50.00	50.00	50.00
Future Target	2018	0.00	0.00	0.00	50.00	50.00	50.00	50.00
Future Target	2019	0.00	0.00	0.00	50.00	50.00	50.00	50.00
Future Target	2020	0.00	0.00	0.00	50.00	50.00	50.00	50.00
Industry 2015 Average								153.00

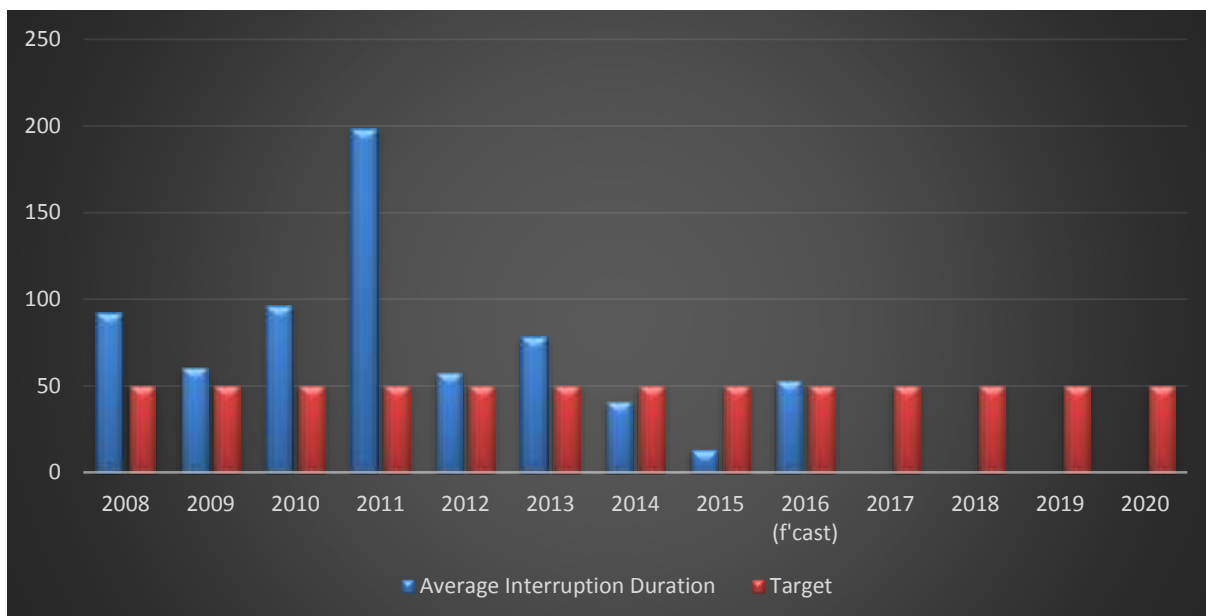

CAIDI is impacted more by Planned Outages. Any planned outage is managed to ensure outage time is at a minimum. This is, however, typically more than an hour. With dense urban network most unplanned outage areas can be back-fed from another supply reducing the duration. The balance of the planned (low numbers of consumers, long duration) and unplanned (high numbers of consumers, shorter duration) make the targets achievable. Any extra planned outages in any given year may affect this.


4.5 Number of Faults per 100 Kilometres of Network

This is a measure of the number of faults in relation to the total length of the network.

In the last five years NEL has had an average of 5.7 faults per 100 kilometres of line per year. The industry average was per 100 kilometres of line for 2015 was 9.3

Faults per 100 km of network

	Year End	Total
Actual	2004	9.80
Actual	2005	13.60
Actual	2006	4.40
Actual	2007	8.90
Actual	2008	7.70
Actual	2009	9.96
Actual	2010	9.94
Actual	2011	2.27
Actual	2012	4.54
Actual	2013	5.7
Actual	2014	6.1
Actual	2015	8.2
FORECAST	2016	4.0
Future Target	2017	4.00
Future Target	2018	4.00
Future Target	2019	4.00
Future Target	2020	4.00
2015 Industry Average		9.29

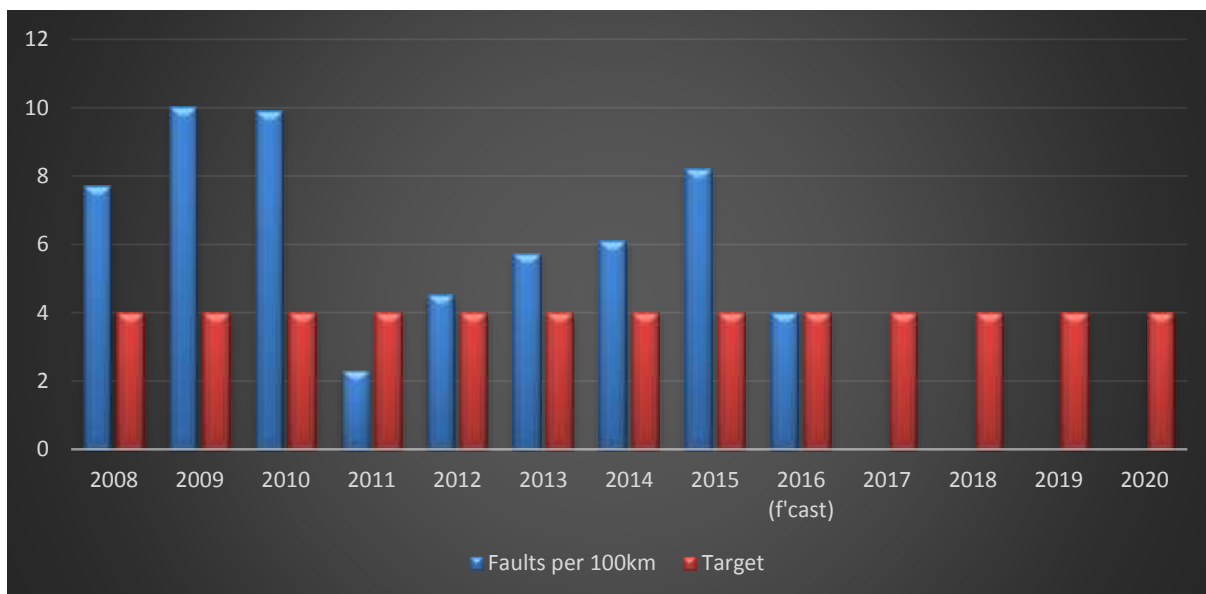

NEL is a small network and any fault has a severe impact on the faults per 100 kilometre statistic. In previous years the performance levels have been affected by cable strikes associated with contractors carrying out works for other utility operators or Nelson City Council. An awareness campaign on safe digging techniques was implemented reducing the number of these types of cable faults.

The 2016 year has seen just one cable fault and three events related to adverse weather or wildlife on the overhead network. The target of four faults per 100 kilometres of line is based on the theoretical best performance of an underground network. To maintain this target, in addition to other maintenance or capital expenditure initiatives, NEL will continue to educate contractors and the public on electricity network risks.

4.6 Asset Performance

NEL's asset performance is in line with typical failure rates of assets throughout New Zealand. The table below is a summary from the "Electricity Engineers Association Guidelines for Security of Supply in New Zealand Electricity Networks" August 2013.

As NEL is a small network a single failure has a significant effect on failure statistics and trends must be taken by comparing at least five years of failures. Currently, NEL averages two 11kV/400V transformer failures per year but has had no 11kV switch failures in the last five years. The cable and line failure rates are also in line with the table.

Typical Failure Rates of Assets

Item	Typical Failure Rate	
	Rate	Per
33kV Pole Lines	5.0	100 cct km/year
11kV Pole Lines	10	100 cct km/year
33kV Cables	2	100 km/year
11kV Cables	4	100 km/year
Power transformers 2.5 – 300MVA	30	1000/units/year
Distribution transformers	2	1000/units/year
11kV Indoor switchgear (zone substation located)	1	1000/units/year
11kV Indoor switchgear (network located)	1	1000/units/year
11kV Outdoor switchgear (network located)	1	1000/units/year


4.7 Financial Performance



Operational Expenditure	Industry Average 2015	2013	2014	2015	2016 Estimate	2017 Forecast	2018 Forecast	2019 Forecast	2020 Forecast	2021 Forecast
Network	\$106	\$72	\$95	\$58	\$60	\$75	\$77	\$78	\$80	\$81
Non Network	\$148	\$183	\$148	\$149	\$148	\$153	\$156	\$159	\$162	\$166
Capital Expenditure	Industry Average 2015	2013	2014	2015	2016 Estimate	2017 Forecast	2018 Forecast	2019 Forecast	2020 Forecast	2021 Forecast
Network	\$368	\$538	\$1,362	\$137	\$71	\$103	\$99	\$112	\$106	\$176
Non Network	\$25	\$7	\$8	\$1	\$5	\$10	\$10	\$11	\$11	\$11


The most appropriate financial target measures for NEL are the Operational Expenditure and Capital Expenditure split into Network and Non Network per connection point. It is, however, difficult to compare financial network performance with other networks given that these measures vary greatly depending on the type of network.

Operational costs per ICP are overall in line with targets for 2016. NEL has forecasts cost increasing at 2% per year this factors in the expected additional costs with regard to compliance information technology support. .

Capital Expenditure Costs per ICP are below forecast for the year due to a review of the 10 year capital expenditure plan in the early stages of the 2015/16 year. This review was as a result of confirmation of declining consumption and zero peak demand growth forecast for the short to medium term. All growth related projects have either been deferred or dropped. The Plan predominantly focuses on safety, security of supply and asset renewal. This review resulted in \$2,000,000 being removed from the five year capital expenditure plan.

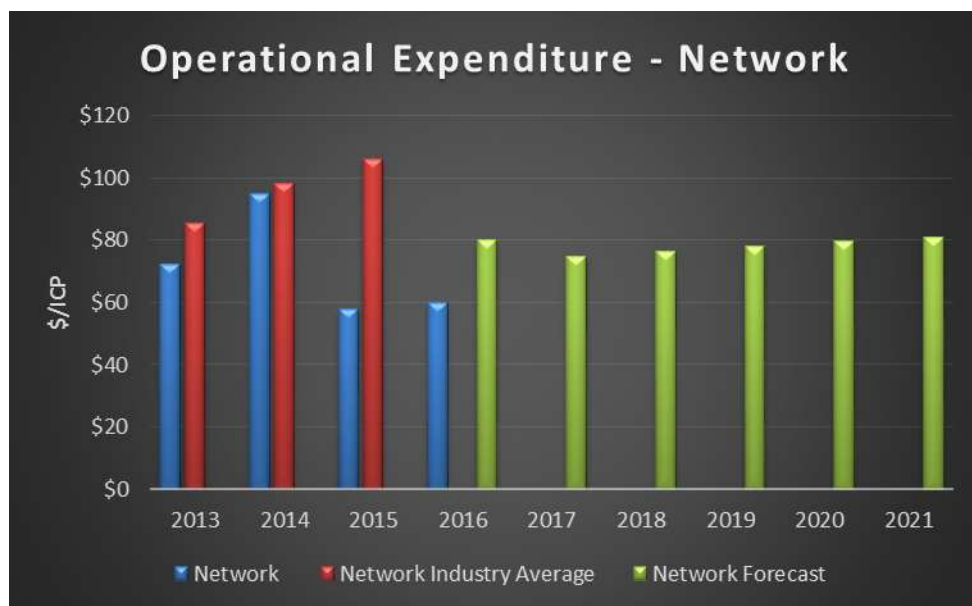

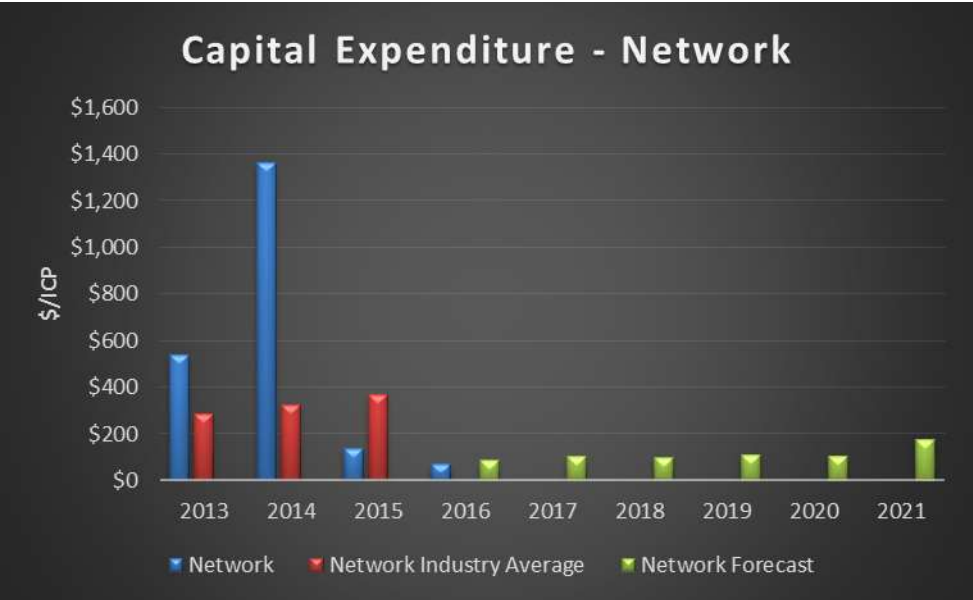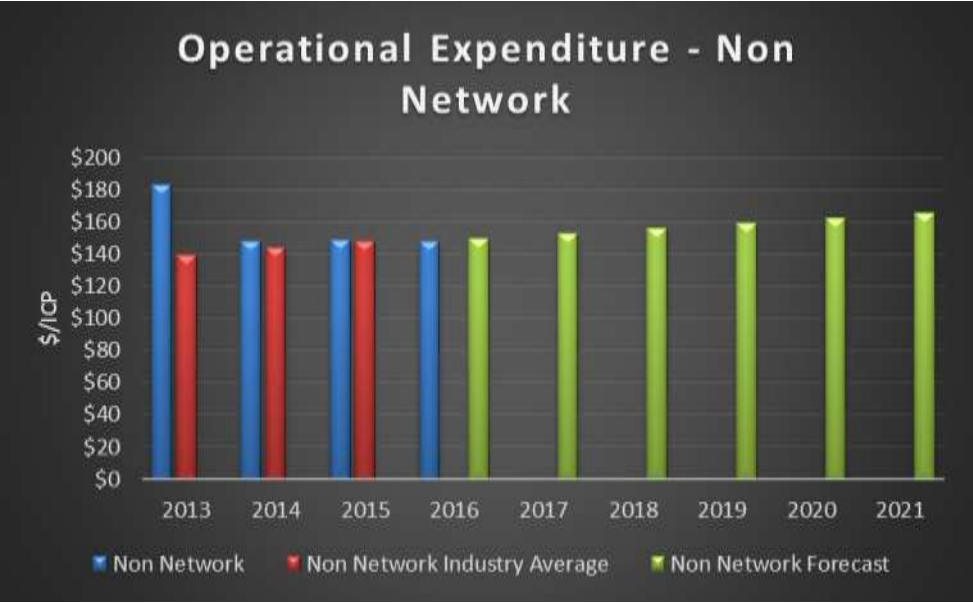

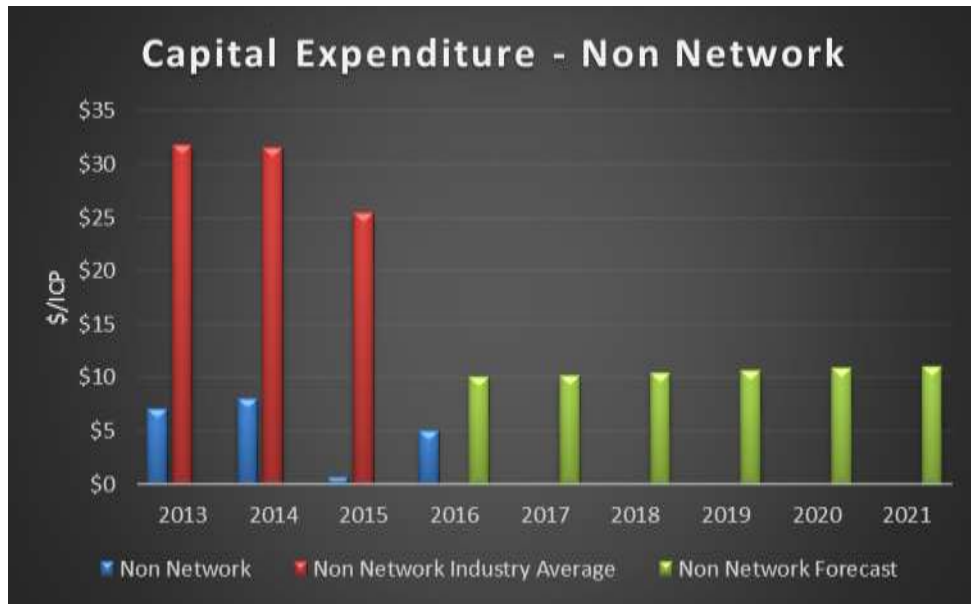

4.8 Improvements

As shown above, NEL has a reasonably high reliability and performance level compared to the industry average. The 2009 and 2010 figures were significantly affected by Transpower outages at Stoke, Kikiwa and Islington Substations. To provide a step change in reliability and performance Nelson Electricity has completed two major projects to reduce system interruptions and improve security of supply. In addition a number of initiatives have been implemented to maintain the improved performance:

- **33kV Improvements**

NEL has completed the replacement of the Zone Substation at Haven Road and the installation of a fourth 33kV feeder from Transpower's grid exit point at Stoke Substation resulting in full N-1 capability on the 33kV network.

- **11kV Reinforcement**

NEL is continually planning to improve the 11kV supply by investigating the following:

- Backup supply;
- Ring feeds;
- Reducing risk of failure;
- Minimising interruption times;
- Addressing excavation contractor issues;
- As part of the 33kV cabling project, NEL took the opportunity to lay spare ductlines for future underground 11kV reinforcement and extensions.

- **400V Improvement**

NEL is progressively improving the flexibility of the 400V network by:

- Installing LV Bus Isolators on 11kV/400V substation LV Boards;
- Installing easy break sectionalisers on 400V lines;
- Installing NCP fusing in ground mounted boxes where possible;
- As part of the 33kV cabling project, NEL took the opportunity to lay spare ductlines for future underground 400V reinforcement and extensions.

- **Reducing Cable Faults**

NEL continues to identify, audit and model cable performance and any cable not meeting standard or approaching overload will be scheduled for replacement or reinforcement.

NEL has a number of faults every year attributable to cable damage caused by excavation contractors. Such incidents further reduce the reliability and integrity of the network due to additional cable joints and cable repairs. The Cable Location Contractors are authorised to perform all cable locations on the NEL network. As part of this function, the Contractors are required to meet the excavation contractor on site prior to any excavation near a NEL cable. If there is either a 33kV cable or an 11kV cable present, the Cable Location Contractors will encourage the excavation contractor to request that an Approved Observer is on site while the excavation is being carried out. Recent changes to NEL policy means that an Observer is provided for free of charge for excavations of two hour duration. NEL also keeps in contact with excavation contractors to ensure they are aware of any concerns NEL may have.

Incidents, accidents and near misses are recorded internally in NEL's register. Where required a letter is sent to Worksafe, for their information, advising of the incident/accident and the action taken by NEL to correct or prevent a future occurrence. A report is also obtained from the contractors involved in the incident.

- **Reducing Planned Interruption Numbers and Duration**

NEL is seeking to reduce the frequency and/or duration of planned interruptions and is continually looking at ways to minimise the numbers and duration of interruptions by the following:

- An audit is carried out prior to any shutdown to identify any additional works to be performed taking advantage of the shutdown. The result will give NEL maximum benefit from any network shutdown, possibly reducing the requirement of future planned interruptions;
- Implement procedures, which will either eliminate the requirement for interruption or reduce the duration;
- Ensure maximum resources are allocated to the shutdown;
- Improvement of back feed options;
- Use of approved contractors for live HV and LV work ⁽¹⁾.

(1) Live line work introduces a safety risk and is more expensive to undertake. Live line work is avoided where possible and kept to an absolute minimum.

- **Asset Life Cycle Audits**

NEL strives to improve the asset life cycle audit process. Ongoing communication with other network companies will ensure processes are in line with best industry practice. This will ensure NEL's ability to determine the best approach to asset management and ultimately reduce the possibility of interruption. Refer Audit Programme **Appendix A**.

Assets are audited at different frequencies depending on the type of asset:

- 33kV main substation – monthly;
- Substations(including transformers and OCBs/switches) – six monthly;
- 11kV and 400v wood poles – three yearly;
- 11kV and 400v concrete poles – five yearly;
- Link boxes – two yearly visual safety, five yearly internal audit;
- Service boxes – two yearly visual safety, five yearly internal audit.

NEL has comprehensive maintenance and development programmes which continue to aid in the improvement of the network. These plans attempt to maintain or improve the network security of supply.

- **Communication Links**

NEL has installed radio links between its major switching stations and the Zone Substation to enable accurate status reports to be available on the SCADA system. Where suitable circuit breakers are installed, these links have been utilised to allow remote switching at the major sites.

4.9 Quality of Supply

NEL has a target of supplying all consumers with a quality of supply that meets or exceeds the standards set in the Electricity Regulations and in other industry Codes of Practice. Additionally, NEL will meet alternative standards of reliability and price for customers who are prepared to enter into contracts. The qualities of supply that are measured or monitored are:

- Voltage;
- Capacity utilisation;
- Load factor;
- Distribution losses;
- Power factor;
- Harmonics;
- Interference.

Voltage


During times of peak winter loading, voltage snap shots are taken across the entire network. Voltage and load checks are made at all substations and recordings are made at substations and end of line boxes. Data is gathered at these points, entered for analysis into the Office Management System and any voltage or overload problems are scheduled for rectification.

Fluctuating Voltage

Regulations require voltage supplied to consumers to be 230 volts $\pm 6\%$. The network is designed to meet this requirement. There are, however, times where load changes can cause consumers to experience voltages outside of the requirements. Any complaints are investigated and, if proven, changes to the network are made to remedy the situation.

Nelson Electricity's target is to have no more than seven proven complaints received per year.

A comparison between target and the customer and network problems is shown in the table below.

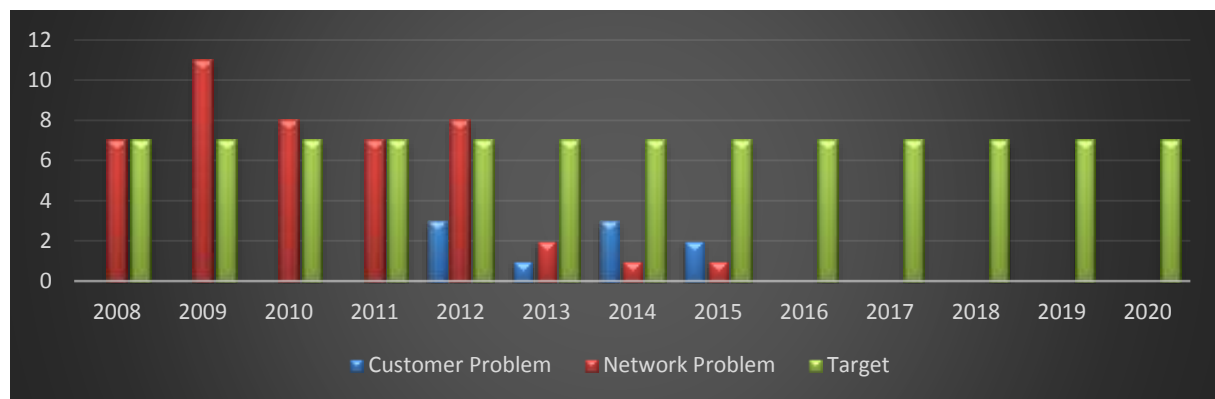

If the network problem cannot be identified and rectified at the time of the complaint, a voltage recorder is installed at the Network Connection Point for a 24 hour period. Although voltage variations are sometimes detected by the recorder, they very seldom fall outside the tolerances allowed by the industry. In recent years there has been a gradual reduction in network related faults in this area and this trend is continuing.


Capacity Utilisation

NEL has traditionally relied on Maximum Demand Indicators to record the loadings on key sections of the network. However, recent changes in the industry have resulted in networks being driven harder and so the accurate logging of data in areas previously covered by Maximum Demand Indicators is now becoming a necessity.

NEL monitors the key 11kV feeder loads via the SCADA system. Similarly, portable loggers are installed temporarily at substations that are showing high loadings on the transformer or network cabling.

The figures indicated in the graph below are derived from the average Maximum Demand Indicator reading across the three phases at each 11kV/400V distribution transformer.

In conjunction with load recording, transformer temperatures are typically monitored as part of the Planned Maintenance Programme. Where high temperatures are reported a portable logger is installed in order to provide more accurate information about the temperature and associated load of the transformer. If overheating is occurring the transformer will be programmed for replacement.

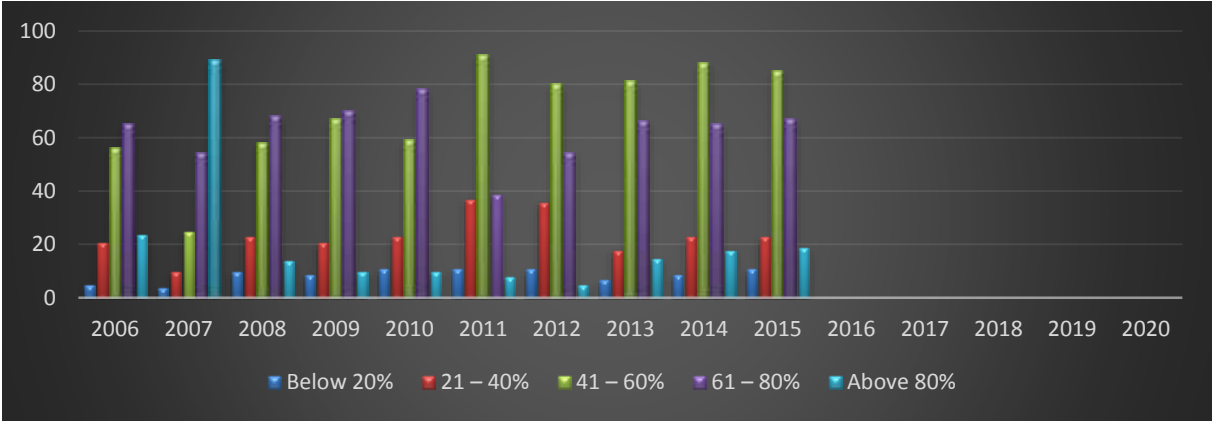

The key 11kV feeder loadings are logged every 30 minutes. It should be noted that the ratings of key feeder capacities have been downgraded to reflect the rating of cables partially installed in ducts rather than direct buried. Refer to the 11kV Feeder Loadings graphs in the Network Development section (section 5.1).

Overall network capacity utilisation is 35.1%. This is above the industry average but has been reducing since 2009 from 37.5% as a result of operational management decisions. The current level of capacity utilisation is considered satisfactory although slightly below target. This figure is affected by a number of factors:

- **Load Control** – Use of load control in winter to only manage transmission peaks can result in local network peak demand being higher thus reducing capacity utilisation.
- **Optimisation of transformer capacity** – Reducing transformer size where there is excess capacity. This is only undertaken when it is cost effective to do so.
- **Developer related projects** - Where the consultants over-estimate the supply requirements meaning larger transformers than actually necessary being installed. This reduces capacity utilisation.

It may take some time to increase capacity utilisation back to the target of 37%.

Capacity utilisation is calculated by the following formula:

$$\frac{\text{Maximum Demand}}{\text{Transformer Capacity}}$$



Load Factor


NEL’s load factor is currently 50% which is 10% below industry average. Key reasons for this level are as follows:

- With 9,200 consumers located in an area of only 24 square kilometres, NEL does not benefit from as much diversity as the larger network companies do;
- NEL has a high proportion of business consumers with higher day time loads;
- High seasonal differences between summer and winter.

It would be difficult to improve load factor without compromising or seriously affecting the level of load control already utilised. This could result in less hot water heating and increasing consumer dissatisfaction. The target set for the planning period is 54%.


The load factor is calculated by the following formula:

$$\frac{\text{GXP kWh}}{\text{Maximum Demand x hours in the year}}$$

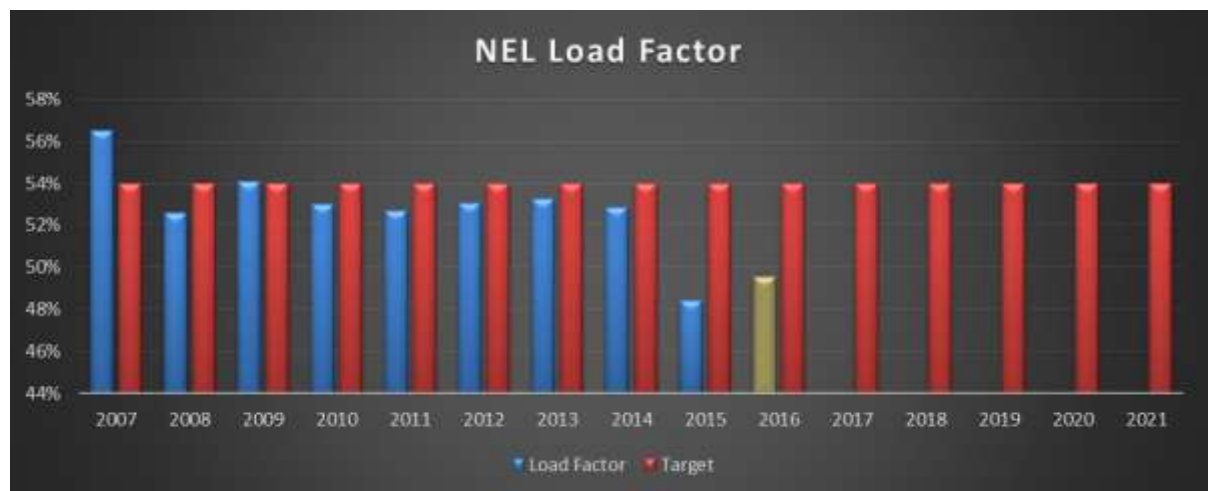

Distribution Losses

The actual loss ratio for the year ending 31 March 2016 is estimated at 3.5%. This is considered satisfactory given the type of network although slightly lower than the 3.8% expected.

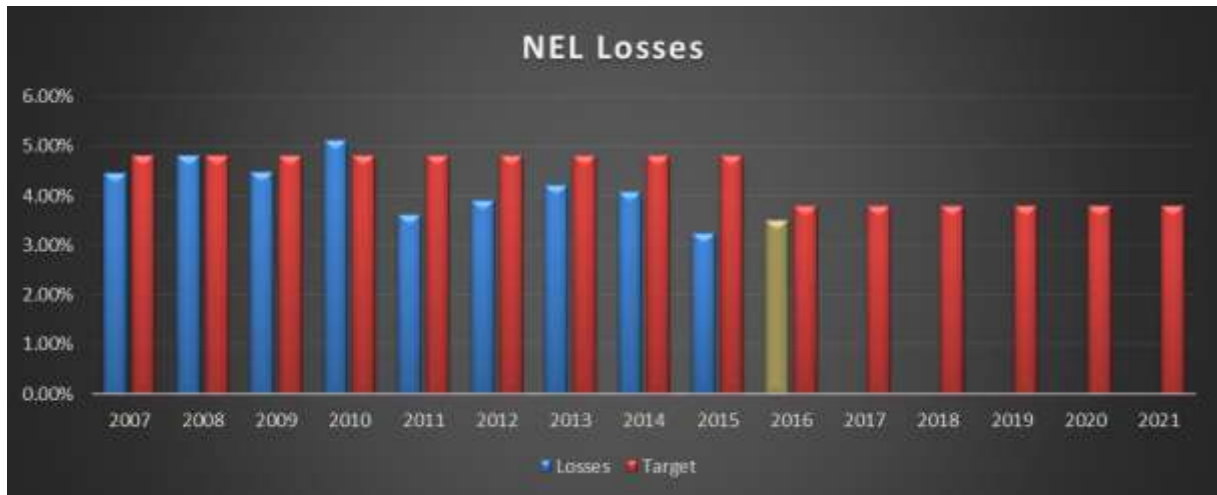

The 12 monthly losses have some variability due to the reliance of retailer billing information to obtain kilowatt hours consumers have used. The distribution loss forecast was lowered from 2016 once the effect of the new additional 33kV feeder and the new Zone Substation had been in operation for a full 12 months. NEL calculated the technical losses at 3.6%. This is significantly lower than other networks given the high customer density (consumers per kilometre of line).

Non-technical are those losses that cannot be explained eg; unbilled electricity or theft. This has been estimated is at 0.2%. The total losses forecast for the planning period are 3.8%.

Power Factor

Current average power factor is 0.94 - 0.96. The aim for is to have an average power factor greater than 0.95. To achieve this NEL will continue to install test equipment on sites to monitor power factor. Where sites of poor power factor are located NEL recommends the installation of power factor correction. This is further encouraged by the introduction of Power Factor Charges that applies to larger consumers who have a power factor of less than 0.95.

NEL has a winter target for the planning period of power factor greater than 0.98.

Harmonics and Interference

The Network Code, which is available to contractors and public, contains guidelines which address harmonics and interference. Typically harmonic and interference problems are reported by consumers, which results in testing and recordings being made at the consumer’s premises. Such reports are entered and tracked through the Office Management System until the problem is resolved and signed off.

The target level of service for harmonics and interference is that there should be no more than one proven non self-inflicted complaint received per year.

Environmental

NEL cares for the environment. Measures are in place to minimise any effect NEL has on the environment. Examples are:

- Oil spill kit on hand at the Zone Substation in case of any spills on the network;
- Fully bunded Zone Substation at Haven Road.

All assets are assessed for negative environmental impact and are remedied if an issue is identified.

NEL has a target level of service of zero oil spills on the network per year and zero fires causing damage to third parties resulting from distribution assets.

Safety

NEL is committed to providing a safe network and healthy work environment for all staff, contractors and public. NEL takes all practical steps to ensure network safety and if issues are identified they are then remedied within an appropriate timeframe. Issues regarding public safety take priority and are addressed on every Capital Works project.

NEL has a target level of service of no loss time injuries from staff and contractors working on the network. All assets that have been identified as being a safety risk to public (for example; following asset damage, break in) are required to be attended to by fault contractors within 30 minutes of receiving notification.

4.10 Customer Service

NEL distributes electricity to approximately 9,200 customers and communicates with customers by way of newsletters and radio advertising covering pricing and issues relevant at the time. Consumers generally address their enquiries to their retailer or in the case of a fault, to NEL's fault call provider.

When dealing with customer service the issue of quality is defined as the quality of the electrical supply a customer receives. This includes any issue that has an impact on the customer's perceived level of supply from NEL. For example; voltage, frequency, reliability, backup supply, alternative supply options and dedicated assets.

Customer engagement is part of normal business process. NEL's asset management decisions, in relation to price and quality trade-offs, are compiled from engagements with customers.

For the purposes of this section, the customer is an electricity customer connected to the NEL network.

Advising Customers about Price-Quality Trade-Offs

- **Line Price Options**

NEL properly advises its customers of direct line price and quality trade-offs by publishing line prices and associated quality in The Nelson Mail newspaper and on the NEL website (refer www.nel.co.nz) in accordance with the Electricity Disclosure Regulations. The tariffs provide direct price and quality trade-offs through, for example, controlled and uncontrolled prices.

Pricing options and other network issues are periodically published on the NEL website and occasionally a newsletter that is delivered by NZ Post to all of its customers.

NEL is also reliant on Electricity Retailers to appropriately advise their customers on the most appropriate pricing options. Retailers are in contact with the customer on a monthly basis as part of the billing process. Retailers also have account managers for the larger customers who are typically skilled in issues relating to quality of supply and price.

Electricity Retailers are informed of any changes to the NEL tariffs so they can properly advise their customers of the options available to them.

- **Major Customer Survey**

Customer surveys provided the largest 20 customers with the opportunity to broadly consider price and quality trade-offs. Four broad options were presented to each customer:

- Pay a bit less to receive a bit less reliability;
- Pay about the same to receive about the same reliability;
- Pay a bit more to receive a bit more reliability;
- Pay a lot more to receive a lot more reliability.

Most of these 20 largest customers indicated a preference to continue paying about the same to receive about the same reliability.

- **Mass Market Telephone Survey**
Two hundred random customers were surveyeded in March/April 2012 and of those only 8% surveyed would be prepared to pay more for an improved reliability of supply. There is little evidence to suggest this has materially changed.
- **New and Changed Connections**
NEL provides specific price and quality information to customers in response to new or changed connection enquires. The types of price quality considerations include; capacity, how to configure the network for the connection cost of options, consideration for joint benefit options, etc.

Consultation with Customers about the Quality of Goods and Services they require with Reference to Price

- **Major Customer Consultation**
NEL engaged an engineering consultant to consult with customers about price quality trade-offs. The top 20 largest customers were contacted directly via telephone. These 20 customers represented a broad cross-section of the larger customer base from 18GWh down to 500,000kWh per year. The smallest of the 20 were supermarkets, hotels and retirement villages.
- **Mass Market Telephone Survey**
Two hundred random customers were surveyed in March/April 2012. Price quality trade off type questions were included in the survey.
- **Line Price Options**
NEL has provided mass market customers the opportunity to consider line price and quality trade-offs via the mail dropping of newsletters and publishing of tariff prices in The Nelson Mail newspaper. The newsletter and newspaper provide the opportunity for customers to directly contact NEL with any issues or requests on the price and quality information included. Line prices are also published on the NEL website.
- **Contractual Relationship with Retailers**
NEL engages the Electricity Retailers in many ways.

NEL has a signed Use of System Agreement (UoSA) with retailers and, as part of this Agreement, provides them with price and quality information. NEL had to negotiate the terms of the UoSA with the retailers including price and quality of supply.

There have been informal discussions with the three dominant retailers on the network that being; Trustpower, Meridian Energy and Contact Energy. The methods of discussion vary from face to face to phone conversations. Indirectly these discussions can have an influence on the price quality trade-off. The issue for NEL is that its reliability has always been excellent and that the customer is used to this level of reliability.

There is a low level of community understanding over the difference between actual line prices and what retailers repackage them as. Informal discussion with most customer type's show that many cannot differentiate between line prices and the retailers delivered prices.

- **New and Changed Connections**
NEL consults with Electricity Retailers, developers, electrical contractors and customers in response to new or changed connection enquires through meetings, telephone calls and written communications. NEL has a vested interest in ensuring the network is configured in a manner that can provide the appropriate capacity for new loads while not reducing the security of supply to existing connections.

Consideration of the Views Expressed by Customers

- **Tariff Options**

Informal feedback as a result of the tariff price and quality information from the mass market indicates customers have lost touch with the role a Line Company plays in the electrical industry since the separation of Line and Energy companies in 1999. The mass market customer only considers the total electricity bill value without separating out line prices. The perception to them is that electricity prices are always increasing and have little regard to the fact that line prices have remained the same or at similar levels while retail electricity prices have increased (up until recent times). Consequently it is difficult in some instances to discuss and demonstrate price versus quality trade-offs.

The findings of a telephone survey in 2012 showed that half did not know that Nelson Electricity was a Line Company but that most were happy with the current system reliability. It is clear that customer's impressions are industry impressions and do not differentiate between generation, transmission, distribution and retail.

- **Major Customer Survey**

A review of consultation with major customers has revealed that only one of the 20 largest customers was willing to consider alternative price and reliability options (specifically receiving increased reliability).

- **Mass Market Telephone Survey**

A review of the survey is that customers do not want to pay more for an improved quality of supply. There are some findings that have been introduced which include more safety advertising to get the NEL name more in the media including improvement in utilisation of radio when larger outages occur to convey relevant information with likely restoration times to customers. NEL has used radio advertising for safety and operational matters regularly since 2013.

- **New and Changed Connections**

In agreeing to new or changed connections, NEL has implicitly considered the views and requirements of the customer in terms of quality and quantity. Typically NEL will receive a Network Connection Application with a requested capacity and then will investigate what or if any alterations to the network are required to supply the requested capacity. In some situations NEL may suggest options whereby both parties can benefit. In the example of a new substation supplying a new building, NEL may offer the capacity at a reduced price if a larger transformer can be installed on their premises and have excess capacity available for the network.

NEL will evaluate the dollar contribution required for the new load to connect to the Network on a case by case basis.

Taking Customers Views into Account when Making Asset Management Decisions

NEL is in a good position where it can demonstrate an excellent reliability track record while providing average prices to customers.

At a high level NEL has adopted the following processes for acting on customer responses:

- NEL's Asset Management Plan includes the customer consultation phase in all major decisions concerning capacity and supply security;
- NEL remains responsive to approaches from customers about service levels;
- NEL takes into consideration any feedback it receives from customers;
- The Asset Management Plan is designed and caters for the input of customers views. There are two parts to this;

- Where a specific customer wants an enhanced quality of supply and is willing to enter into an appropriate commercial contract with NEL to achieve this. Currently, NEL does not have any arrangements with any customers for an enhanced quality of supply.
 - Where large numbers of customers demand a price quality trade-off that differs from that currently provided.
- **Line Price Options**
Through informal feedback received from customers, NEL has identified that customers do not currently have sufficient information about the network to enable it to effectively consult on price and quality trade-offs. Whilst this directly affects line price options its implications in relation to price and quality are broader.

NEL is considering a number of mechanisms to better inform customers of its role. One such process currently being undertaken is through safety advertising on the radio, where part of the advertisement outlines who Nelson Electricity is and what we do. Any newsletter also includes information on industry structure and NEL's function within that structure.

From the 2012 phone survey only 8% of respondents would call NEL if they had a supply interruption. This demonstrates that the survey responses were, on a whole, an electrical industry response. The majority of the larger customers and mass market customers are happy with current prices and system reliability. Neither group has supported increasing prices for an increase in reliability.

It should be noted that only 3% of mass market customers indicated they would be happy to pay more for a more reliable electricity supply. NEL will continue to monitor this as there may be a change in customer perception in the future and the drive for improved system reliability. The customers who support paying more for a more reliable electricity supply are spread throughout the network and so currently it is difficult to be able to cater to their specific needs without upgrading the whole network for the benefit of all.

- **Major Customer Survey**
NEL intends to meet with customers who are willing to consider different price quality options on a one-on-one basis to discuss the customer's particular requirements and then assess the feasibility of entering into a commercial agreement for NEL to provide a different quality of supply (and hence price) for that customer.

Customer Service Summary

NEL has one of the best electricity network reliabilities in New Zealand. The service levels as outlined in the Asset Management Plan also reflect this. The forecast SAIDI for year ending 31 March 2016 is 12 minutes driven in part by fewer planned outages on the network. The target level is 45 minutes. This has been achieved while the focus has been completing the 33kV Zone Substation replacement and the installation of a fourth 33kV feeder from Transpower's Stoke Substation. Together this has resulted in the improved overall SAIDI performance.



The years 2012-2014 were typically normal and the forecast from 2017 onward are expected to be closer to target with regard to the planned interruptions undertaken.

It has to be noted that given the small network size of NEL only one outage could result in exceeding the target. This is illustrated by the figures for 2009, 2011 and 2012 where one or two significant outages per year can cause the figures to exceed target.

It is also salient that NEL has aging assets and over time even if existing levels of reliability are to be maintained, increased levels of investment will be required.

The customers are predominantly satisfied with NEL's current system reliability performance. We do have to be realistic when we survey customers on reliability, they do not necessarily differentiate between whether an issue is a Retailer, Distributor, Transmission or Generator issue. The important issue for them is what they experience at their premise.

NEL has comprehensive maintenance and development programmes which continue to aid in the improvement of the network. These plans attempt to maintain or improve the network security of supply.

Refer also to Asset Performance Standards under Risk Management.

SECTION 5 - Network Development

5.1 Planning Criteria

The Office Management System is the key source of information required for network development planning. The data is gathered from the following sources:

- Planned Preventive Maintenance;
- Annual Load Survey;
- Life Cycle Audits;
- Known future growth;
- Asset Performance Standards;
- SCADA.

Planning Periods

NEL has different planning periods for different asset types. The planning periods adopted reflect the useful life of the asset and the ability to change or upgrade. As an example, a cable will have an expected life of 45 to 70 years. This type of asset cannot be upgraded and as such will have a longer planning period. A transformer at a substation can be changed to a higher capacity transformer easily so planning periods used will be shorter. There is also limitation imposed by the ODV Handbook as to an acceptable planning period allowing for load growth. These are also taken into consideration.

The classifications and planning periods used are:

- 33kV feeder cabling - 15 years;
- Zone substation - 10 years;
- 11kV feeders – 10 years;
- Distribution transformers – five years;
- 11kV switches – five years;
- 400V reinforcement – 10 years.

The Planning Periods are used to determine the capacity of new assets. Factors which impact on the planning for changes of the various asset types are safety, asset condition, operating life and operating capacity. Measurements and assessments of these factors are gathered from regular testing, recording and audit programmes. The prioritisation of works is governed by safety in the first instance then by the quality of supply to the end user and the number of end users affected. Any network upgrades have to be financially justified and approved.

Planned Preventive Maintenance

NEL has a Planned Preventive Maintenance programme in place which requires each of its 198 11kV/400V substations and thirty three 11kV Link Boxes to be audited every six months. The programme is designed to carry out visual internal and external checks of the substation and associated assets, record any defects, record maximum demand indicator readings, and to carry out basic dusting and cleaning. Each asset type is audited against a pre-printed check sheet and the data gathered is entered into Office Management System.

The maximum demand information gathered is the first pointer to possible overload. It allows areas of perceived overload to be identified and so lends weight to decisions made regarding network alterations or upgrades. Once possible sites have been identified, loggers are installed to assess the timing and duration of peak loadings. The logged data is compared to manufacturer recommendations for the equipment and a decision is then made on whether to replace the equipment.

Annual Load Survey

During times of peak loading between May and September each winter, a load survey is carried out on areas of the network. In this survey, the load on the transformer, time of day, air and transformer temperature, individual LV feeder loads and end of line voltage on the longest LV leg connected to each substation is recorded as a snap shot. The data gathered is entered into the Office Management System and analysed and further site recordings are carried out if required. Where load/voltage problems are identified data loggers are again utilised. The output of this data forms the basis for any decisions taken to reinforce or alter the network. Remedial action is taken immediately if voltages outside the limits of those specified in the Electricity Act are logged. Similar action is taken with equipment or cables that are found to be overloaded.

Life Cycle Audits

As outlined in the Risk Management section (**section 7**), NEL is continually condition auditing its assets. Typical causes for remedial action are service boxes not meeting the industry's touch-proof requirements, wooden poles failing below ground tests, cables showing excessive partial discharge and evidence of partial discharge in HV switches.

Known Growth

NEL encourages network designers, property owners, electricity owners, property developers and promoters of distributed generation to advise of future projects as early as possible, so that advanced planning can be put in place to ensure that the development can be supplied with the capacity requested. Data gathered through the three previous processes above is implemented to manage the network growth.

Asset Performance Standards

Refer Risk Management (section 7).

SCADA

The SCADA system is now used to log current flow every 10 minutes for the key 11kV feeders, so more accurate load diversity and duration data can be gathered for each feeder.

The 33kV/11kV transformer temperatures, currents and voltages are now monitored on the SCADA system.

Other Planning Considerations

At the Zone Substation, weekly checks and recordings are made on the 33kV/11kV transformers and the data gathered is entered into the Office Management System. Monthly reports are produced for the Operations Manager for any necessary action.

A portable data logger is used to log the loadings of transformers that have indicated higher maximum demand readings. This information is vital to assess the necessity of upgrading.

Criteria for Determining New Assets

Based on the information gathered in the Planning Criteria, decisions then need to be made on the capacity and type of replacement asset. The new asset may not necessarily be an identical replacement of the original asset as the requirements of the asset may have changed significantly since the original asset was installed, perhaps some 50 years ago. The selection of the new asset may be influenced by a number of aspects which are listed below.

- **The predicted future growth in that part of the network.** This will typically be faster in commercial situations, however, future residential subdivisions may need to be catered for.
- **The type of load to be serviced.** The area may have been re-designated from residential to commercial meaning that a faster growth rate is likely.

- **The type of role the new asset has to perform.** Recent 11kV cabling installed around the CBD has formed a sizeable “back-bone” for transferring load from one substation to another. This “back-bone” is now being extended towards critical customers like hospitals.
- **The type of asset to be installed.** Typically the 11kV switches and transformers utilised have been mineral oil filled but the recent emergence of vacuum switchgear and the replacement of oil filled switchgear manufacture with SF6 is influencing the choice of switch to be installed. Paper insulated 11kV cables have typically been preferred over the use of cross linked polyethylene but the cessation of production of paper insulated cable within New Zealand and the improved performance of the modern generation of the latter has forced a change to predominantly XLPE for new works.

Prioritisation of Projects

NEL has a relatively simple process for the prioritisation of projects. Firstly the processes are broken into two distinct types of projects.

- **Developer or consumer initiated** eg; residential subdivision or commercial building. Often in this type of project there may be involved the installation of new assets to supply a new load on the network. The project will often be driven by demands external to NEL. There will be a capital contribution required from the developer/consumer for work like this to proceed and the timing will typically be for whenever the developer requires the supply.
- **Network related** eg; 11kV cable replacement, transformer change, service box replacement.

NEL prioritises most of the projects undertaken on the network based on the risk ratings of an asset as detailed in **Section 7**. This rating takes into account all aspects about asset performance including:

- Safety;
- Asset condition;
- Loading on the asset;
- Asset fault history;
- Restoration time if failure occurs;
- Environmental considerations of failure and location;
- Number of consumers;
- Public response if there is an outage;
- Cost due to failure;
- Asset life expectancy.

The timing or priority of projects is based on the risk ratings which typically have been in line with the Asset Replacement Guide in section 3.5. Projects are prioritised with the highest priority being:

- **Safety:** Assets that have been identified as having a safety issue with the public, staff and contractors working on or near assets take top priority. Examples are the replacement of Andelect Series One switchgear and additional touch proofing of LV boards in distribution substations.
- **Technical:** Assets needing replacement or additional assets installed due to load growth and lack of spares to maintain existing assets.
- **Condition:** Asset condition from auditing shows assets need to be replaced.
- **Age:** If an asset is beyond its life expectancy.

There are often projects of similar weighting or priority. These are assessed and prioritised with the projects with the best financial outcome being first. This could be due to project cost, minimising of maintenance costs or timing with another project.

5.2 Predicted Network Demand Growth

The load on the Zone Substation up until 2008 had shown a slow but steady demand growth in the order of 1.0% - 1.5%. This has since plateaued as a result of a combination of the economic downturn in 2008 combined with warmer weather, especially during the winter months, greater energy efficient appliances, improved energy conservation and the installation of solar PV on rooftops. The network peaks during the winter period show a considerable sensitivity to the ambient temperature and extent or type of cloud cover.



Nelson Electricity 33kV Network Peaks

Year	Controlled peak (MW)	Month	Comment on Winter
1995	28.100	July	Medium
1996	28.095	July	Medium
1997	28.185	July	Medium-cold
1998	28.185	July	Warm
1999	28.225	July	Warm
2000	28.800	September	Warm
2001	30.470	July	Cold
2002	29.800	July	Medium
2003	29.800	July	Medium
2004	30.130	August	Cold
2005	31.066	June	Medium
2006	31.699	June	Cold
2007	34.230	July	Cold
2008	32.800	July	Medium
2009	33.530	July	Cold
2010	32.750	July	Warm
2011	32.933	July	Medium
2012	32.040	July	Medium
2013	33.000	July	Warm
2014	34.100	July	Warm
2015	33.318	July	Cold

The peak demand, as shown in the table above, includes the influence of ripple injection load controlling through the winter months. Since the installation of the new Haven Road Zone Substation, there has only been a need to use ripple control to manage transmission peaks only and not for local network constraints and, as such, the peaks of 2014 and 2015 will be higher in comparison to previous years as a result and masks the potential peak demand decline.

The half hour demand curve comparison graphs below compare the 17,520 half hour demands for 2015 and 2011. This shows two things:

- Overall consumption has reduced.
- The 2011 year is more influenced by load control compared to 2015. The 2011 top peaks flatten off where the 2015 does not.

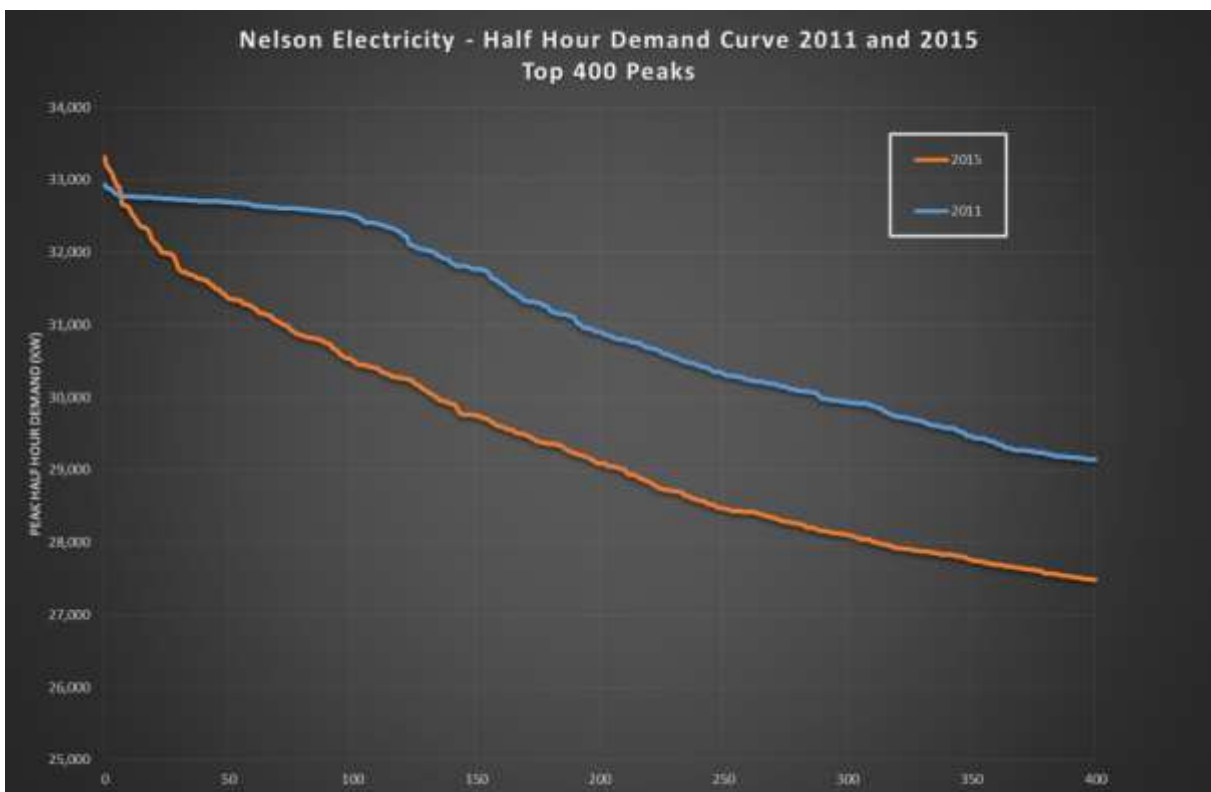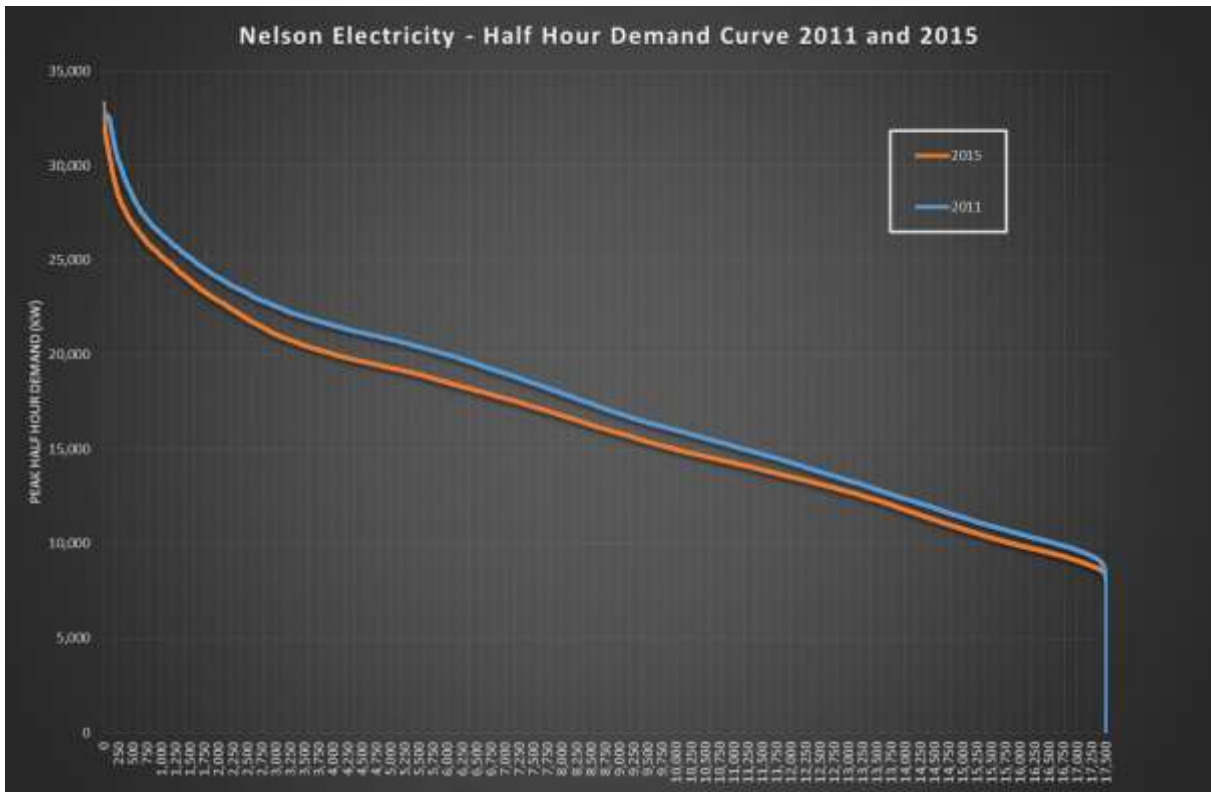

Analysis of electricity consumption of consumer groups, undertaken to determine growth levels, indicates that the negative growth over the last eight years is a combination of a number of things including the economic downturn and also a change in consumer electricity usage behaviour. All consumer groups on a per consumer basis are using less kilowatt hours. The mass market has shown this trend since 2009 and only since 2013 have the Time of Use consumers shown a reduction.

The larger customers are more influenced by economic downturn whilst the mass market consumers will use electricity on an as needed basis. The mass market (particularly residential) is also influenced by the types of appliances being purchased being more energy efficient as well as changes to more efficient heating options, increased retrofitting of improved insulation and now installation of Solar PV panels.

Inquiries at the Nelson City Council have confirmed that within the area supplied by NEL there is some prospect of further subdivision development of up to 160 new homes in the coming years. The key areas are Toi Toi Valley with 100 homes, Paru Paru Road with 40 homes and Betts Carpark with 20 homes. The waterfront area around Wakefield Quay is slowly being developed with apartment complexes being built. There is also the potential for apartments being developed around the central business district fringes, but this will occur slowly. Although the apartment building trend is in its infancy this could make a significant contribution to NEL's future growth.

The Nelson City Council is well down a plan of improving air quality in the city. This plan aims to improve Nelson air quality by 2020. One significant factor is the encouragement to shift to non-polluting heating options as electricity is the most environmentally friendly option. The initial anticipation that there could be an increase in household load as more and more houses convert to electrical heating has not occurred due to these houses reducing other non-efficient electrical heating options at the same time. Much of the heating load will be in the evenings so will have a lesser impact than if the additional load coincided with the winter morning peaks. To date the conversion to electrical heating has not shown sign of additional load on the network.

Another Nelson City Council initiative is facilitating the increasing utilisation of solar for hot water heating and also photo voltaic panels. Currently there are 73 Solar PV connections totalling 305kW and survey results also show 5% of residential consumers have solar water heating of some kind. Although in its early stages, these will have some impact on kilowatt hour consumption but minimal impact on the peak demand as the NEL network peaks on miserably, cold, cloudy, winter mornings which will not assist solar devices. In most cases these sites will rely on the NEL network as a backup.

Latest kilowatt hour consumption figures suggest that the kilowatt hour load is still reducing. It is forecast that consumption will drop further at a rate of between 1% and 2% per year.

Another variable is the effect of the Christchurch earthquake and the influx of people from Canterbury moving to Nelson, the influx of refugees settling in Nelson and the natural immigration. To date consumption changes have not been seen as a result of any increase in population. Given that the NEL network is already developed and with minimal room for new housing, much of this growth will occur on the neighbouring Network Tasman network.

NEL does utilise load control to minimise peaks using its ripple control system. This can be used not only to reduce highest demand peaks on the network but to also minimise transmission charges by assisting in reducing the Stoke Grid Exit Point peak demand and also the Upper South Island peak demand. Since the completion of the new Haven Road Zone substation load control is predominantly only used to minimise transmission charges as the new substation has increased network capacity.


This loading forecast has to date been expressed in the form of active power or MW, but it is critical to the rating of much of the equipment supplying the load that the element of power factor be considered. This is currently in the region of 0.94 - 0.98 for the combined loads at Stoke for Network Tasman and NEL depending on time of day and year. If related to the load at Haven Road it places extra strain on the 33kV lines, cables and 33kV/11kV transformers to supply the active load without exceeding design MVA ratings.

The previous table shows the actual peak loadings on the system at Haven Road for the past 21 years. This is as well as other information used as a base for the following years demand forecast. The setting of the forecast is difficult given the demand and consumption figures have been flat or in decline and there is enough uncertainty as to the effects of all the variables as mentioned in this section.

For the purposes of this Asset Management Plan, NEL has had to assume that 2016/17 has a peak demand which will remain flat at 33MW and consumption reduce by 2%. The consumption decline for the next year takes into account that the 2015/16 year had a colder winter and warmer summer which has meant

kilowatt hour consumption has been artificially higher compared to last year’s levels. If climatic conditions revert back to normal then we can expect that consumption will decline greater than what has occurred in previous years.

Network Demand Growth Forecast

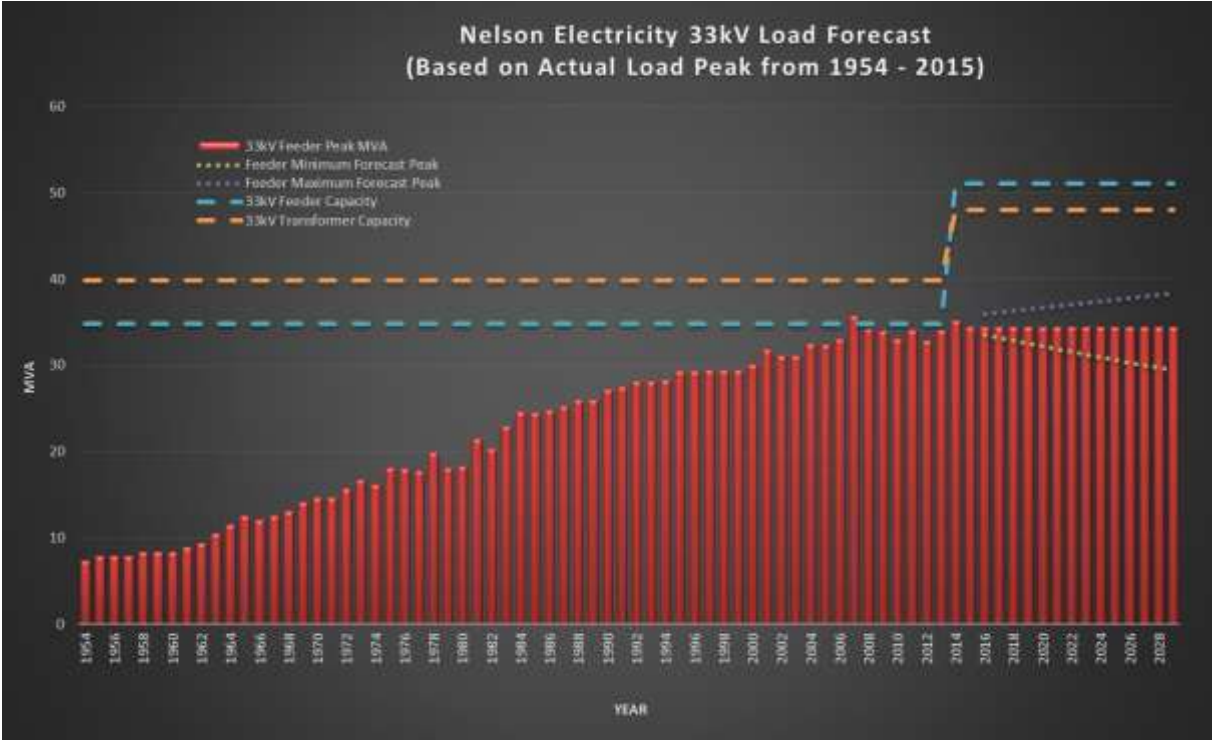


NEL’s load growth predictions were based very much on historical growth and then other known or perceived influences are included to arrive at a final predicted figure for that year. The graph above demonstrates the load pattern since 1954 - peak demand and kilowatt hour growth followed closely with GDP. There has, however, been a departure from the pattern with consumption and peak demand reducing since 2008.

- The peak demand, moving forward, is assessed at being flat with no growth. NEL has had a steady growth rate of 1.5% per year over a long period of time but since 2008 the peak has dropped due to economic downturn and other reasons as described in the previous section. The forecast is considered appropriate given the demand growth uncertainty over the last four to five years.
- Most of the residential infill has occurred and there are limited subdivision options available in the network area. There is the potential for apartment style accommodation but to date there is a limited market for this. For the purposes of the planning period it is estimated that growth would increase 1% per year, recognising there is significant consumption uncertainty which could result in significant re-forecasting once more consumption behaviour evidence becomes apparent.
- The forecast includes the impact of load control. This is in the order of 3MW during peak demand times in the winter. It is assumed, for the load forecasting period, that this level of load control will continue to be utilised.
- Given the limited opportunity for distributed generation, there has not been an allowance made, although an increase in Solar PV installations less than 10kW in capacity has been noted with the reduction in cost of PV panels. This is expected to increase over the coming years.

- There is an upper and lower forecast line included in the forecast to allow for the uncertainties including annual climate and seasonal differences. The Asset Management Plan is designed, and/or contingencies designed, around the maximum forecast level to provide N-1 security of supply. The lower forecast is set at no growth at all for the planning period.
- Uncertain projects or developments form only 0.5% of the assessed growth. In recent years the majority of these projects have typically come from the commercial/industrial customer base and has been in the 200kVA to 500kVA range.
- It is forecast that the demand will not exceed 35MVA next winter and NEL will have the added contingency of demand side management with larger consumers.
- The effect of the Nelson City Council air quality targets is also included in the forecasts. In the longer term distributed generation and other forms of load management are expected to impact on the growth demand pattern but this influence, although expected to be significant, is too unpredictable to judge at this stage. To date the effect has not been noticeable in the overall demand growth.

Network MWh Growth


Up until 2008 NEL had shown a steady increase of approximately 1.5% growth in electricity consumption on the network in line with the demand growth. Since then there have been three events that have reduced demand and consumption. In 2008 there was the “low lake level electricity crisis” and immediately following that was the effect of the economic downturn. The economic downturn coupled with warmer weather has also reduced it further.

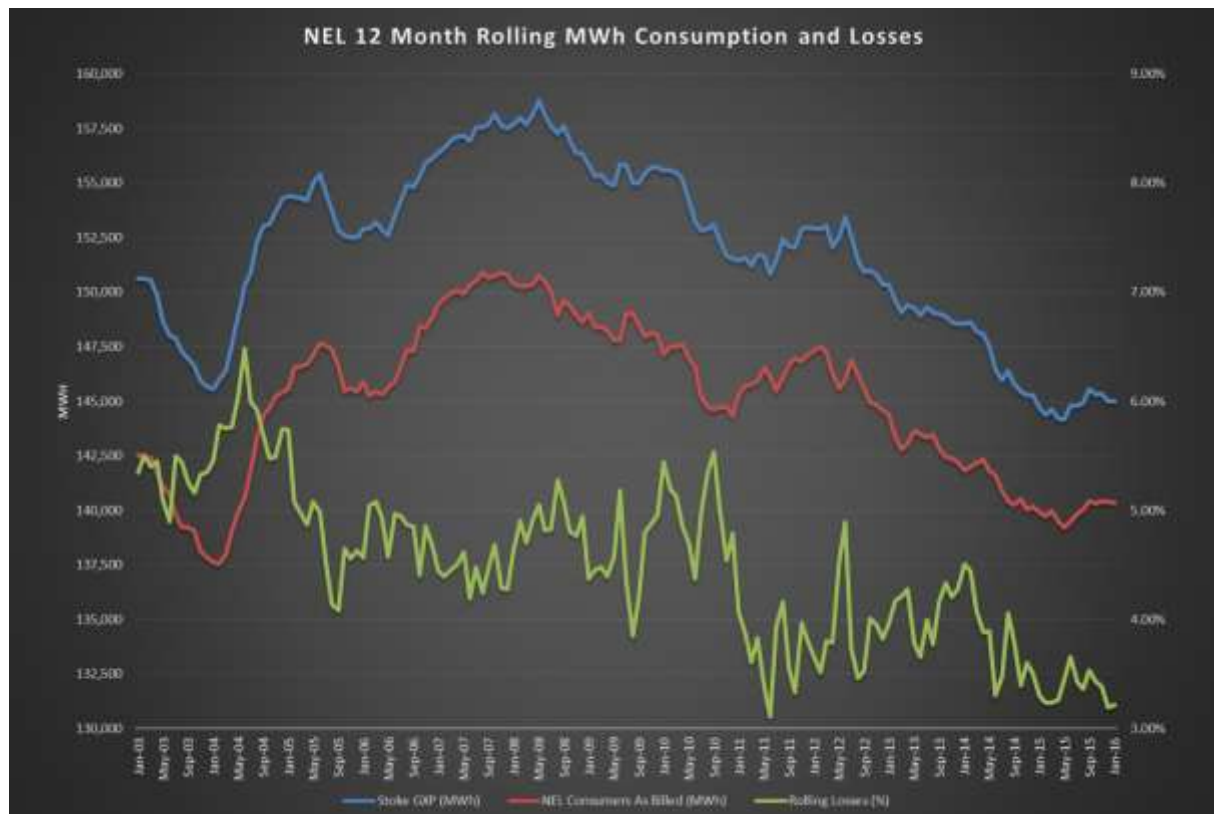

Average kilowatt hour consumption per consumer has been shown to reduce since 2008. The table demonstrates that the average residential consumer in 2016 was using 6,727 kilowatt hours per year down 5.7% from 2012. Business consumers are also using 9.3% less on a per consumer basis.

Average Annual Consumption Change per ICP

Group	2008	2012	2016	% Change in 4 years
Group 1 and 2 Residential Average	7,392kWh	7,135kWh	6,727kWh	-5.7%
Group 2 Business	24,365kWh	24,308kWh	22,041kWh	-9.3%

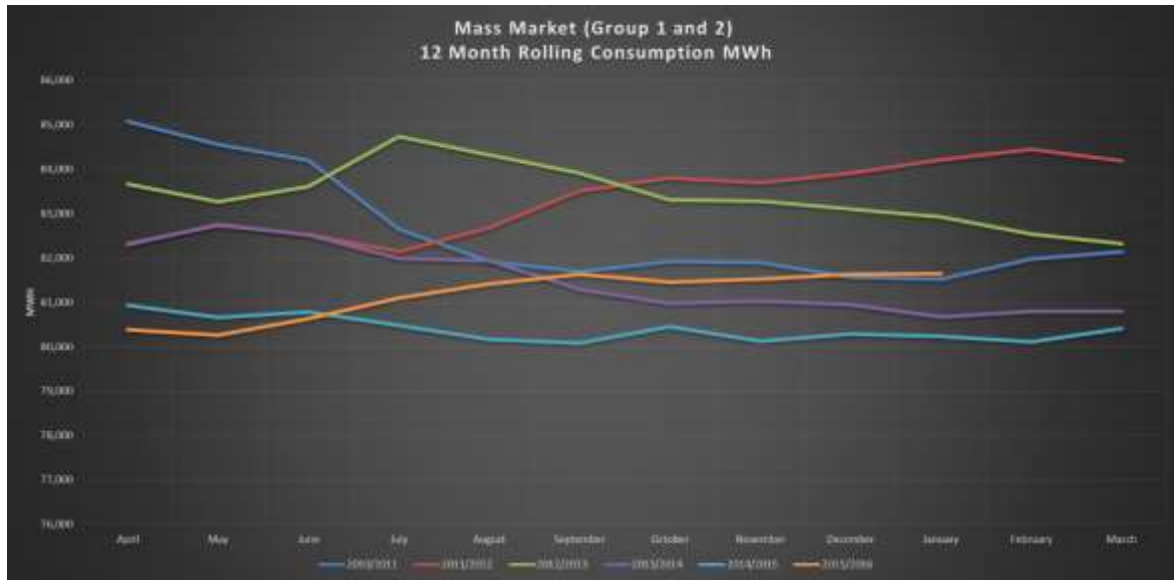

The larger Time of Use consumers have had a reduction in kilowatt hour consumption since 2012. Generally there has been a focus on costs for larger consumers with reductions in consumption and connected capacity. The consumption is expected to plateau and possibly increase in 2016/17 given the likelihood of new Time of Use connections and improved economic conditions for Nelson.



NEL, as a prudent electricity distribution business, has taken a forecasting approach that protects the effectiveness of the Asset Management Plan. The Plan caters for a consumption decline at a rate of 2% for 2017 and then 1% per year thereafter. This Plan recognises there is significant consumption uncertainty

which could result in significant re-forecasting once more consumption behaviour evidence becomes apparent.

Forecasted MWh Consumption						
	2012	2013	2014	2015	2016 (Est)	2017 (Est)
Stoke GXP	153,043	149,064	148,204	144,638	145,000	142,313
MWh Billed	147,067	142,791	142,168	139,960	140,300	137,500
Losses	3.90%	4.21%	4.07%	3.23%	3.21%	3.50%

33kV Configuration for Load Growth Requirements

The new configuration of four 33kV lines has full N-1 capacity of 52.5MVA at NEL. It is expected that at the upper end peak demand forecast will not reach 35MVA so there is plenty of spare capacity available in the event of a failure or future load growth.

The maximum load NEL can draw from any three of the four 33kV feeders from the Stoke Grid Exit Point is 48MVA. The current contingency for a multiple 33kV feeder outage occurring during a winter peak demand time that is in excess of forecast and higher than 35MVA demand, is to arrange for major consumers to shed load. The required reduction would likely be in the region of 0.5MW. There is in excess of 2.5MW of load shedding and distributed generation available to utilise in an emergency (excluding benefits of 3.0MW of ripple control).

Although no longer required for load control for peak demand, load control will still be utilised for managing transmission costs and emergency load management situations.

The four 33 kV line and cable combination ratings are as shown in the table below:

Component	Feeder: Rutherford St	Feeder: Vanguard St	Feeder: St Vincent St	Feeder: Waimea Road
Line	Dog Rating: 305/365 A (17.5/21 MVA)	Dog Rating: 305/365 A (17.5/21 MVA)	Dingo/Weka Rating: 330/370 A (19/21.2 MVA)	N/A
Cable	330A (17.5 MVA)	330A (17.5 MVA)	330A (17.5 MVA)	400A (23MVA)
Overall assigned continuous rating	17.5 MVA	17.5 MVA	17.5 MVA	23MVA
Total capacity: 75.5 MVA				

Note - the overhead line sections Rutherford Street, Vanguard Street and St Vincent Street are owned, operated and maintained by Network Tasman, whilst NEL has sole utilisation of them for supplying its network. NEL owns the Waimea Road feeder cable from Transpower's grid exit point at Stoke Substation to the new Haven Road Zone Substation.

33kV/11kV Transformer Configuration for Load Growth Requirements

The existing configuration of 33kV/11kV transformers at Haven Road Substation is three banks of three phase 16/24 MVA ONAF transformers installed in 2013/14 as part of the Zone Substation replacement project. This provides for 48MVA at an N-1 security of supply level.

11kV Feeder Configuration for Load Growth Requirements

NEL has 14 main 11kV Feeders that link the 33kV/11kV Zone Substation with key 11kV/400V switching stations on the network. These 11kV feeders all have N-1 security level.



Over a number of years the 11kV feeders have gradually been replaced due to age or capacity with the remaining two 11kV feeders planned to be replaced in the next 10 years. These are Snows Hill and Victory Square, both due to capacity constraints for wider network flexibility. Most other 11kV requirements involve upgrading further out in the network. There are also various new and upgraded 11kV lines linking the existing 11kV feeders out in the network which are planned to simplify back-feeding of supply in the event of an 11kV outage.

11kV Feeders from Haven Road Substation



The 11kV feeders are a critical part of the network. They radiate out from the single Zone Substation and provide backup capacity for the neighbouring feeders in the event of another 11kV feeder outage. The following are individual 11kV feeder forecasts out to 2021. They also give an indication as to the forecasted loadings of all feeders as they will be set up for the winter of 2016. Also, there is a table demonstrating the assessed capacity and N-1 backup support for other 11kV feeders. Note, the tables and graphs in this section target the peak demand times during the winter and do not take into consideration the different diversity characteristics of each 11kV feeder. These then represent a worst case scenario.

There is some flexibility in changing of 11kV break points in the network to alter feeder loads. Break point locations are reviewed annually to optimise the network efficiency and back up support capability.



Nelson Electricity 11kV Feeder Backup Capacity																		
(Based on 2015 Winter Load Profiles)																		
			N-1 Support for 11kV Feeders (Amps)															
Feeder	Rating	2015	GPO	Anzac Park	New St	Alma Lane	Bank Lane	Snows Hill	Victory Square	Emano Street	Wash Valley	Port	Vick Street	Sealord	Traf Centre	N-1 Support	Feeder Max Load Level	Reserve Capacity 2012
Washington	300	150								120		120				120	180	150
Snows Hill	300	186		100		100	100		100							100	200	114
GPO	300	235		50	50		50									50	250	65
Sealord	300	180											100		100	100	200	120
Victory Sq	300	217		75				75		75						75	225	83
Bank Lane	300	165	120	120		120		120								120	180	135
New St	350	160	125			125										125	225	190
Traf Centre	300	54											200	125		200	100	246
Port	350	112									135		140			140	210	238
Emano St	300	166							120		120					120	180	134
Anzac Park	350	211	120				120	100	120							120	280	189
Alma Lane	350	215			120		120	120								120	280	135
Vickerman	300	78										130		185	130	185	115	222
Total Backup Capacity			365	345	170	345	390	415	340	195	255	250	440	310	230			
Total Spare Backup Capacity			215	159	-65	165	173	250	180	141	143	84	229	95	152			

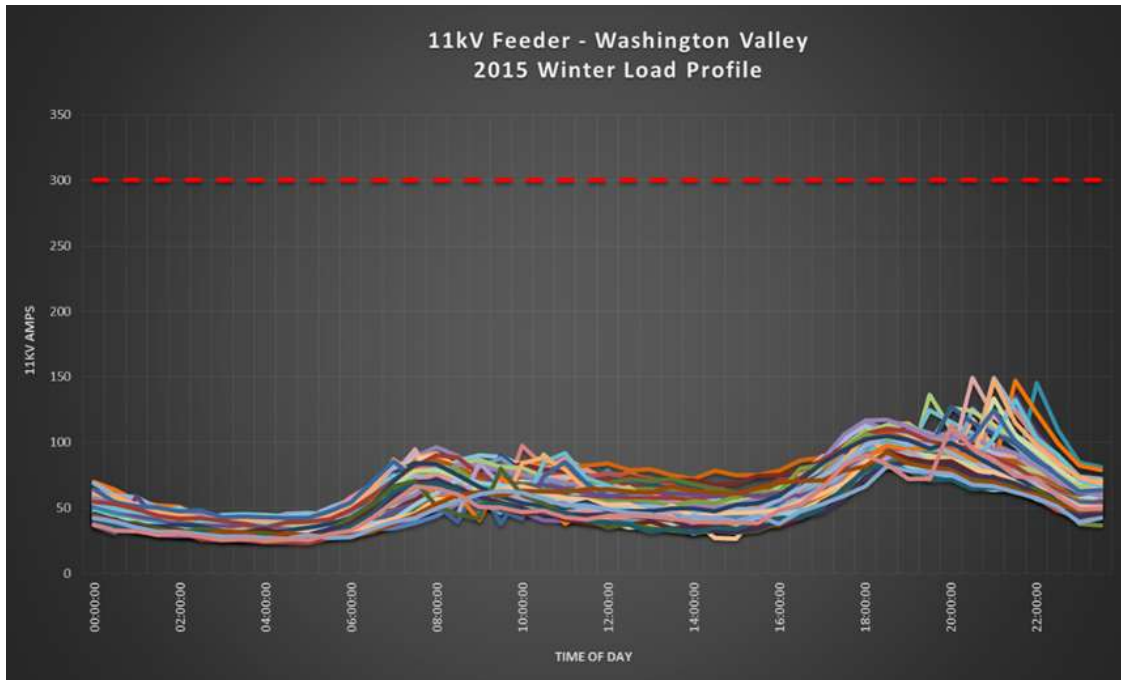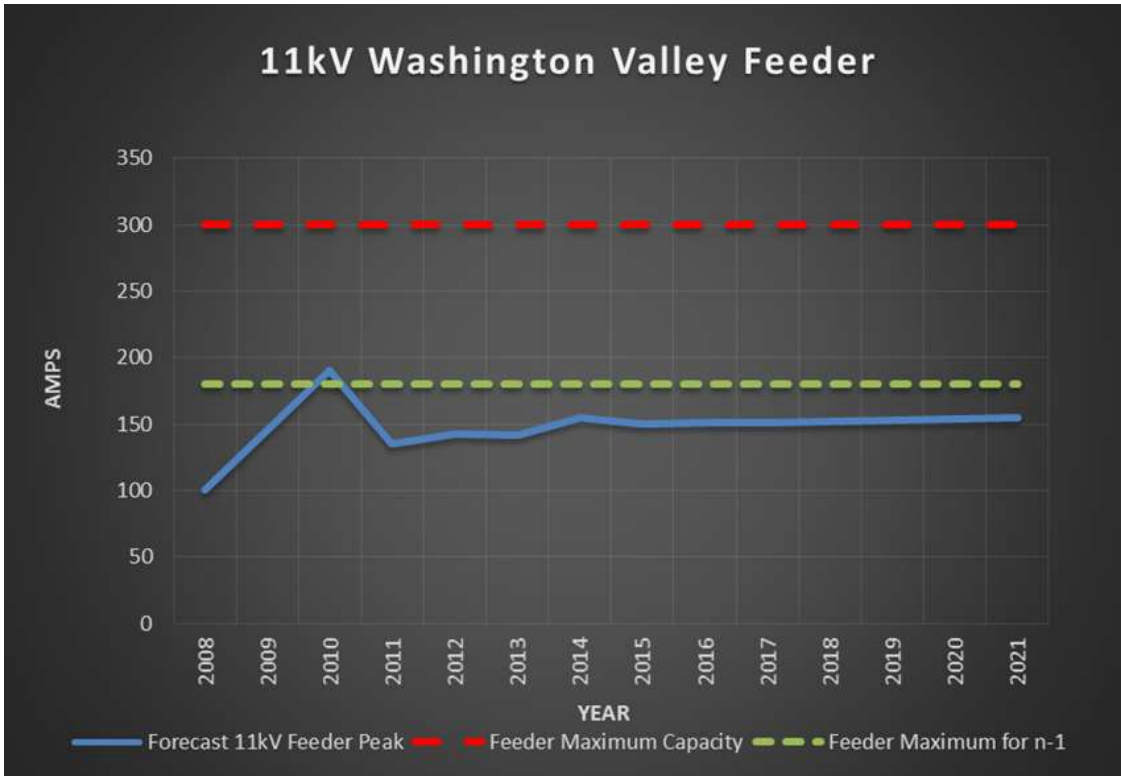



The Washington Valley feeder supplies the Washington Valley and Port Hills areas. Load is mostly domestic. This feeder provides backup supply to the Port and Emano Street feeders.

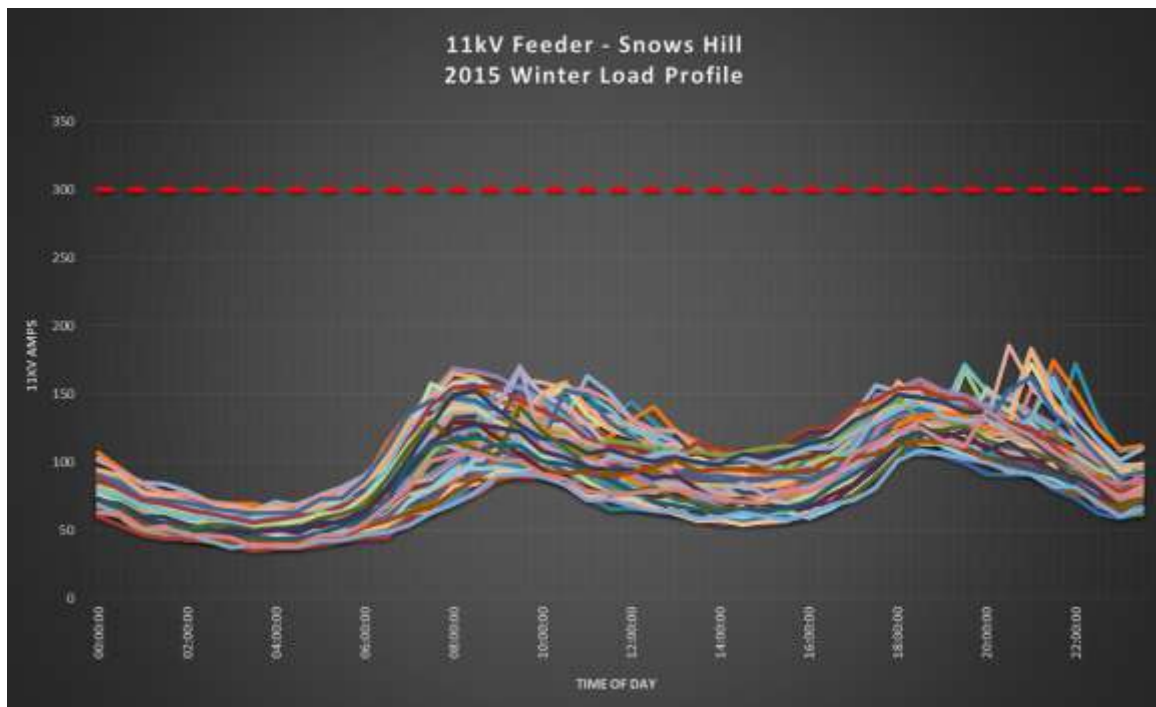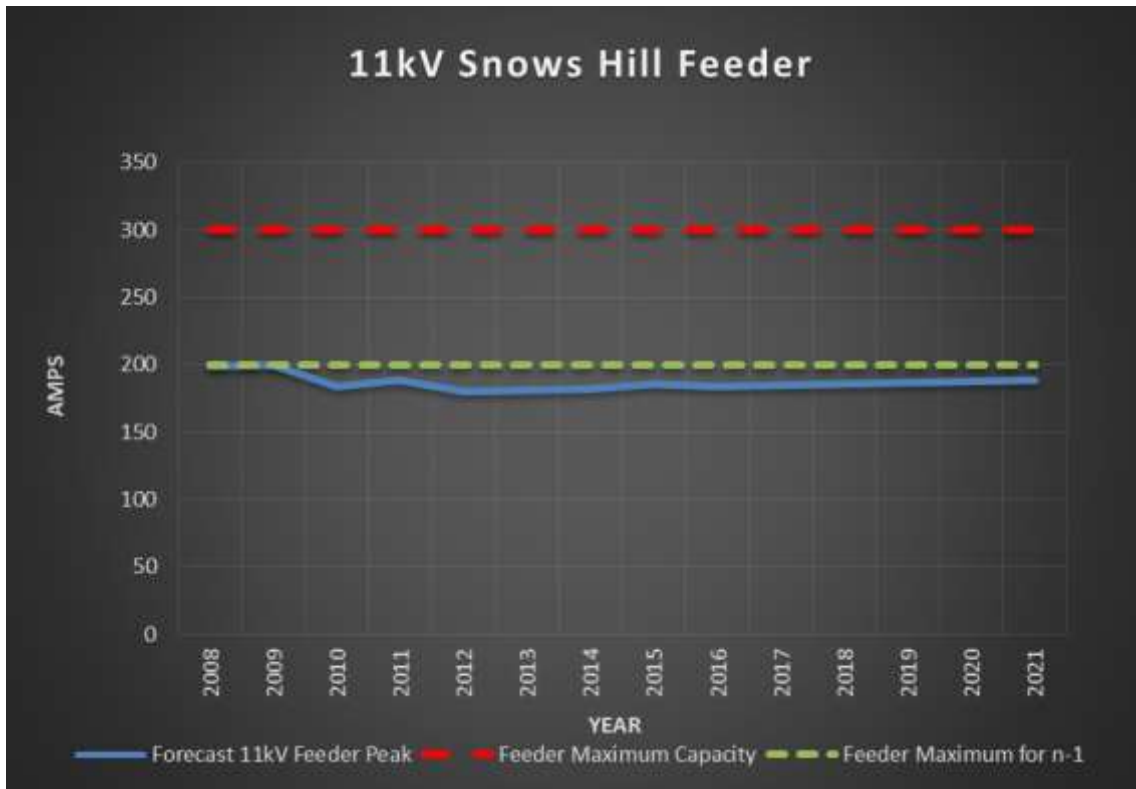



The Snows Hill feeder supplies the south eastern side of town including; the colleges and Mount Street areas. The loading is mostly domestic as well as school load.

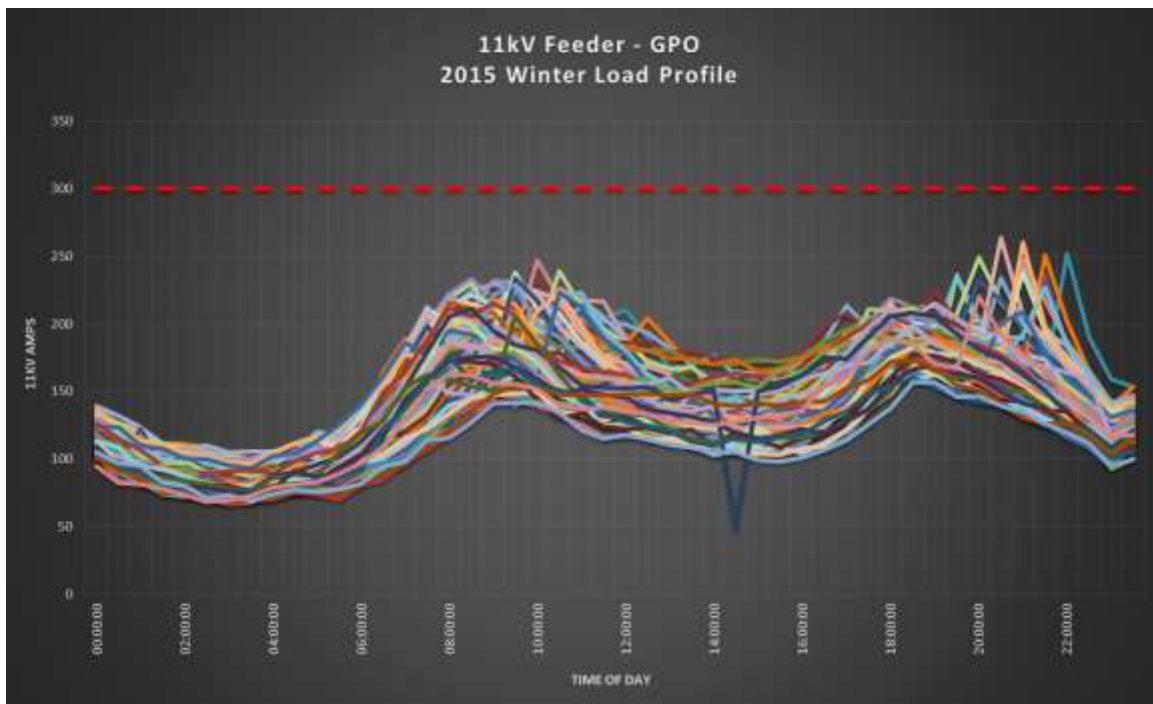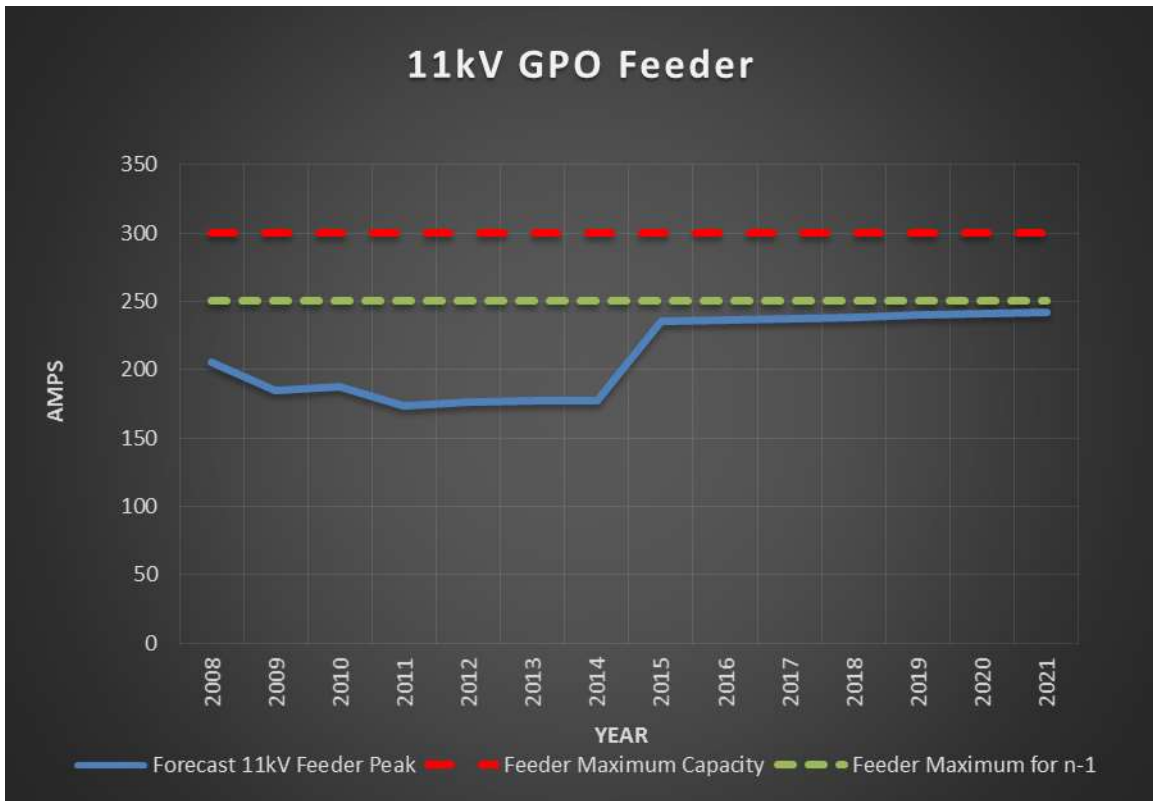



The GPO feeder supplies the northern end of town including Halifax Street (CBD) and the Wood suburb. The load is a mixture of commercial and domestic. This feeder is also an important back-feeding option for the central business district and New Street feeder.

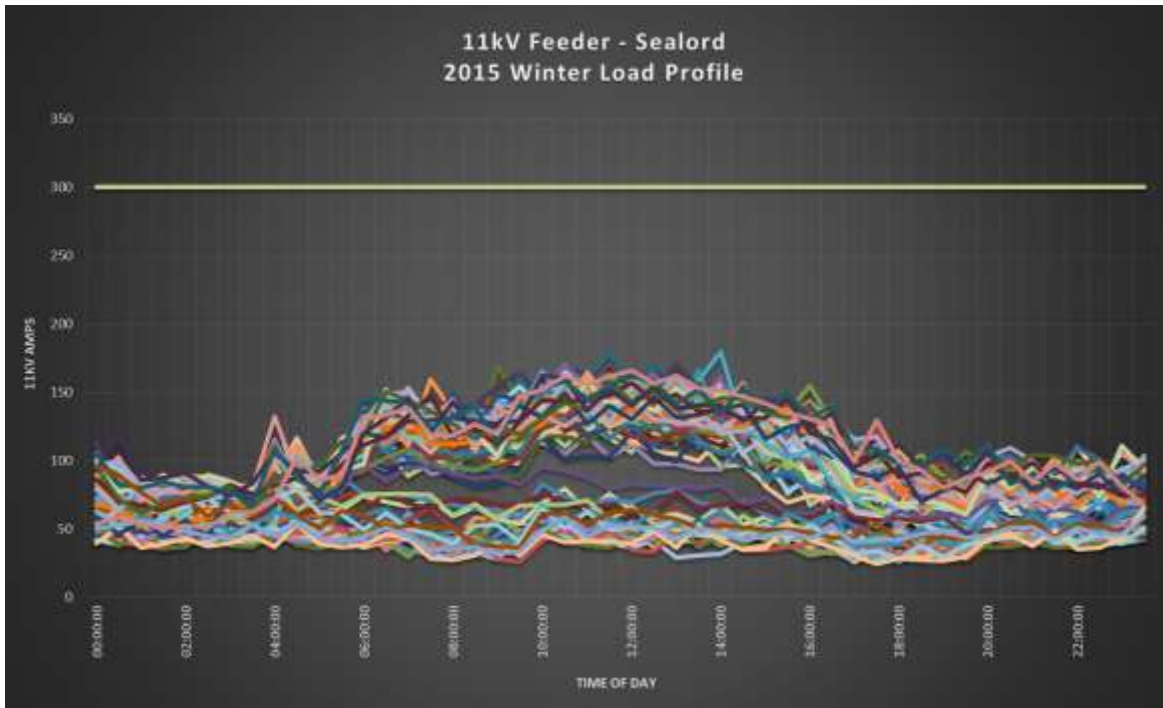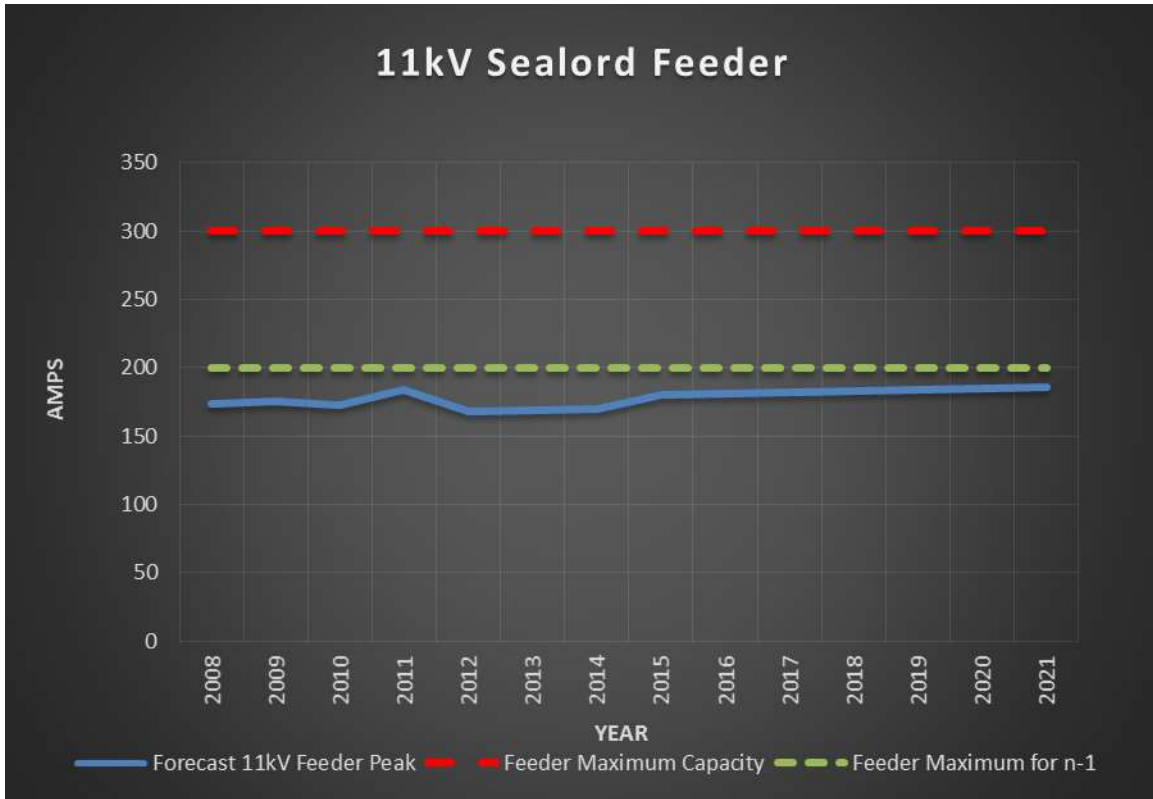



The Sealord feeder supplies the Sealord fish processing factory at the Port area. This feeder is also used as a back-feeding option for the Port area.

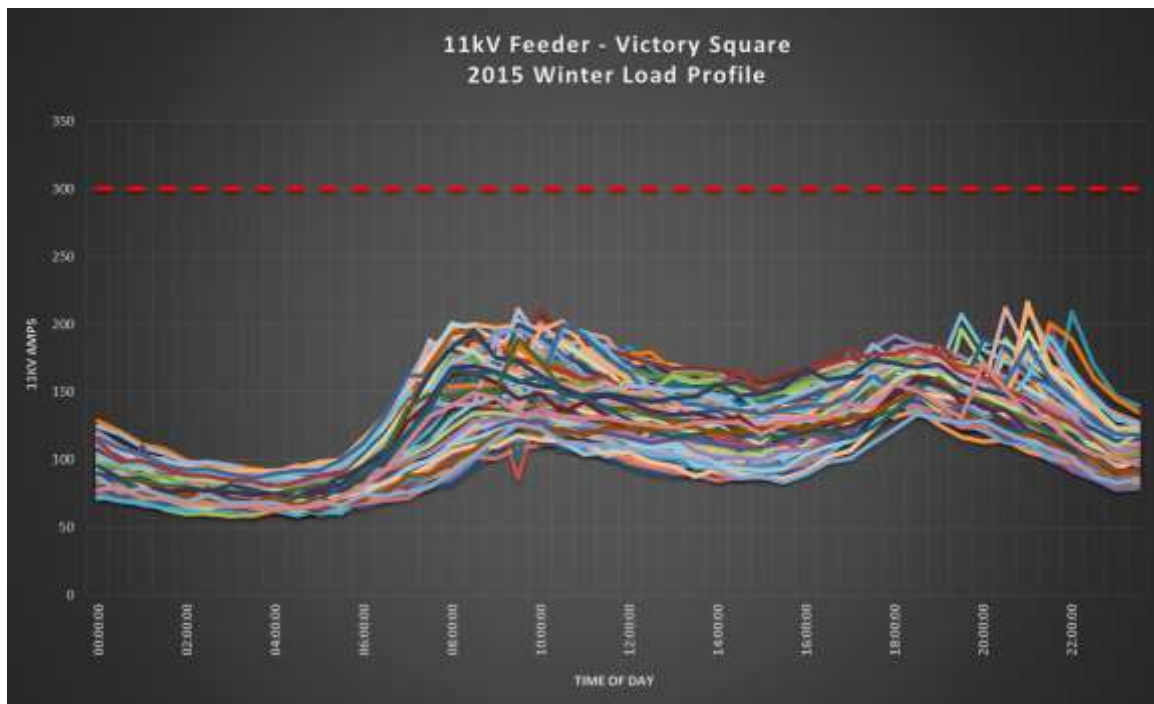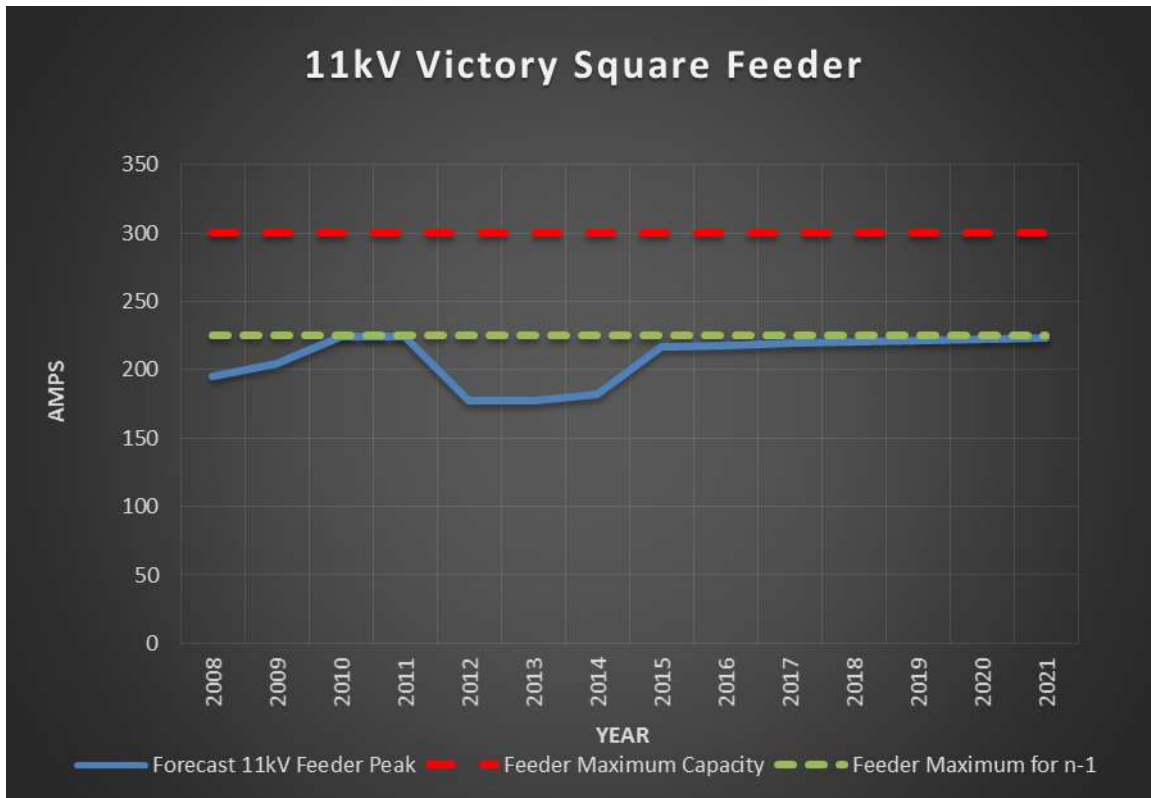



The Victory Square feeder supplies the southern end of town including; Victory Square, Toi Toi Valley, Intermediate and Hospital areas. The supply is a mixture of domestic, light industrial and Hospital load.

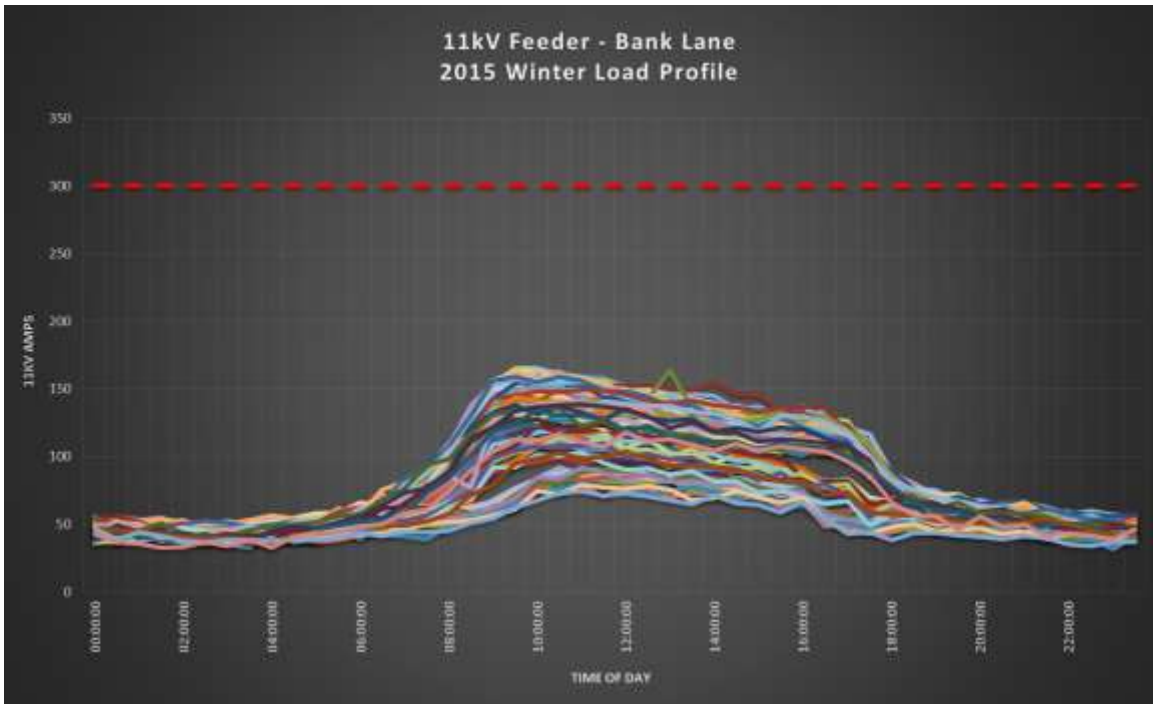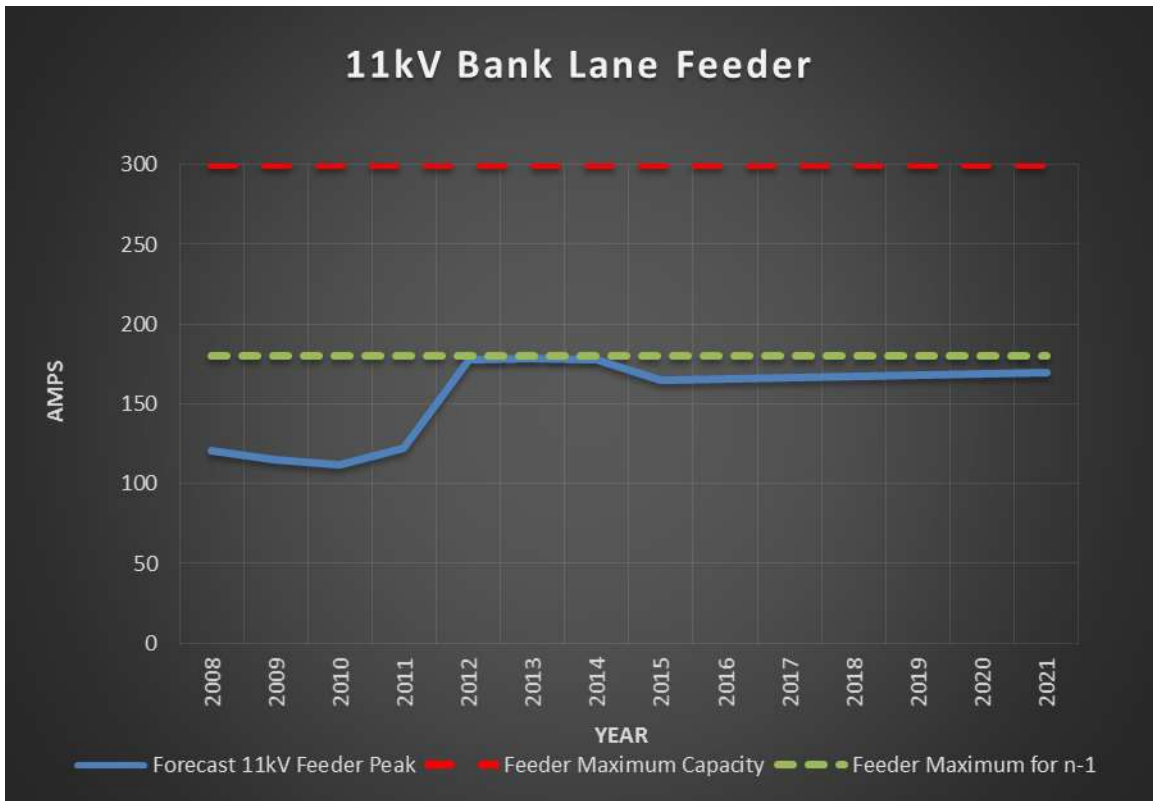



The Bank Lane feeder supplies the inner Nelson central business district. Its loading is commercial. It also provides a necessary 11kV back-feeding option for Alma Lane, GPO and Snows Hill feeders.

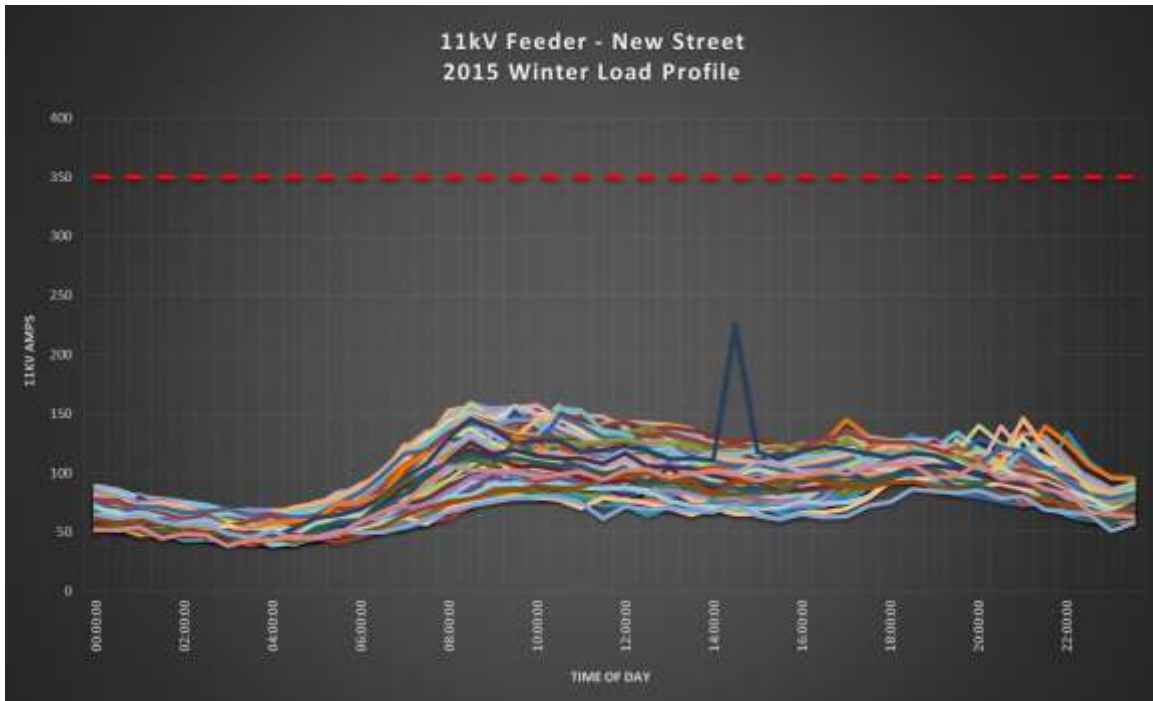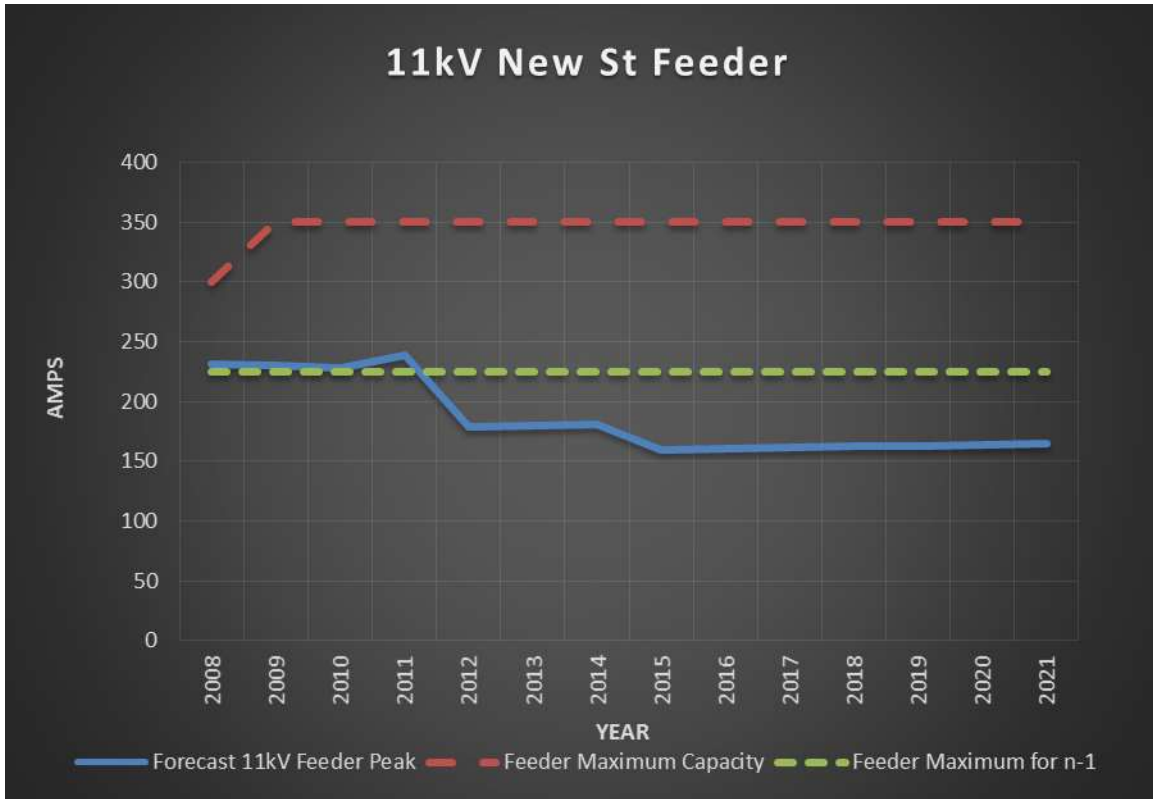



The New Street feeder supplies the north eastern Nelson central business district, Botanics and Nile Street East areas. Load is a mixture of commercial and domestic. This feeder was replaced in 2009 to provide additional N-1 backup capacity at 11kV feeder level.

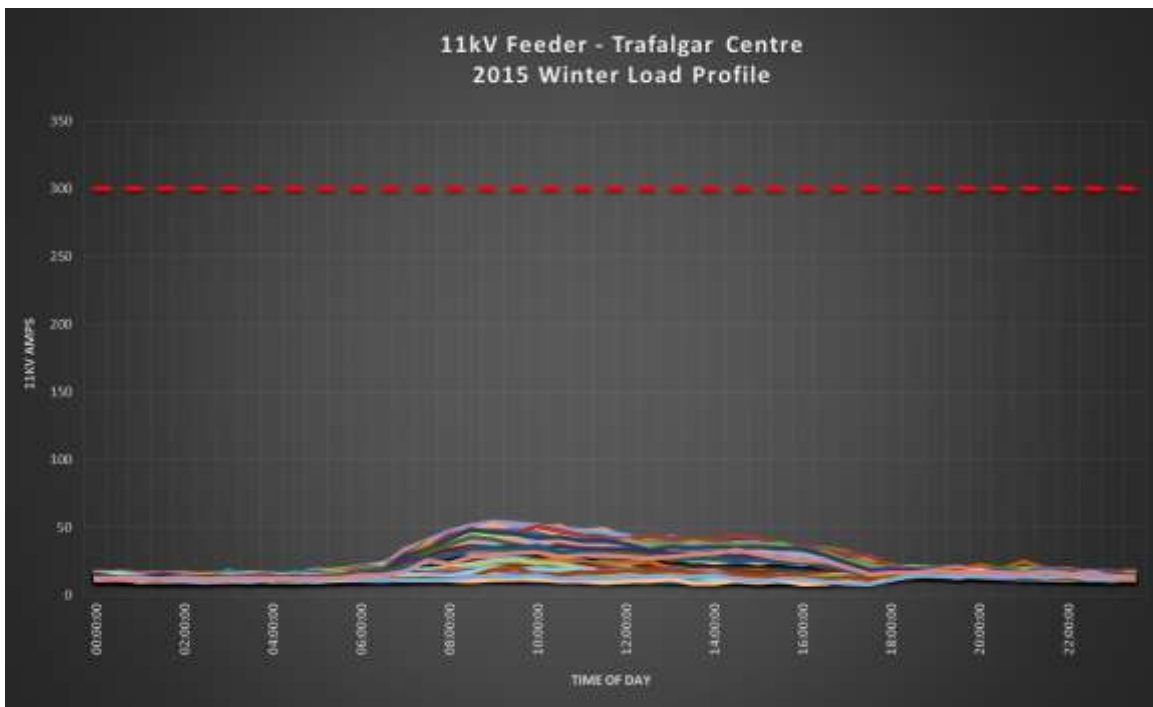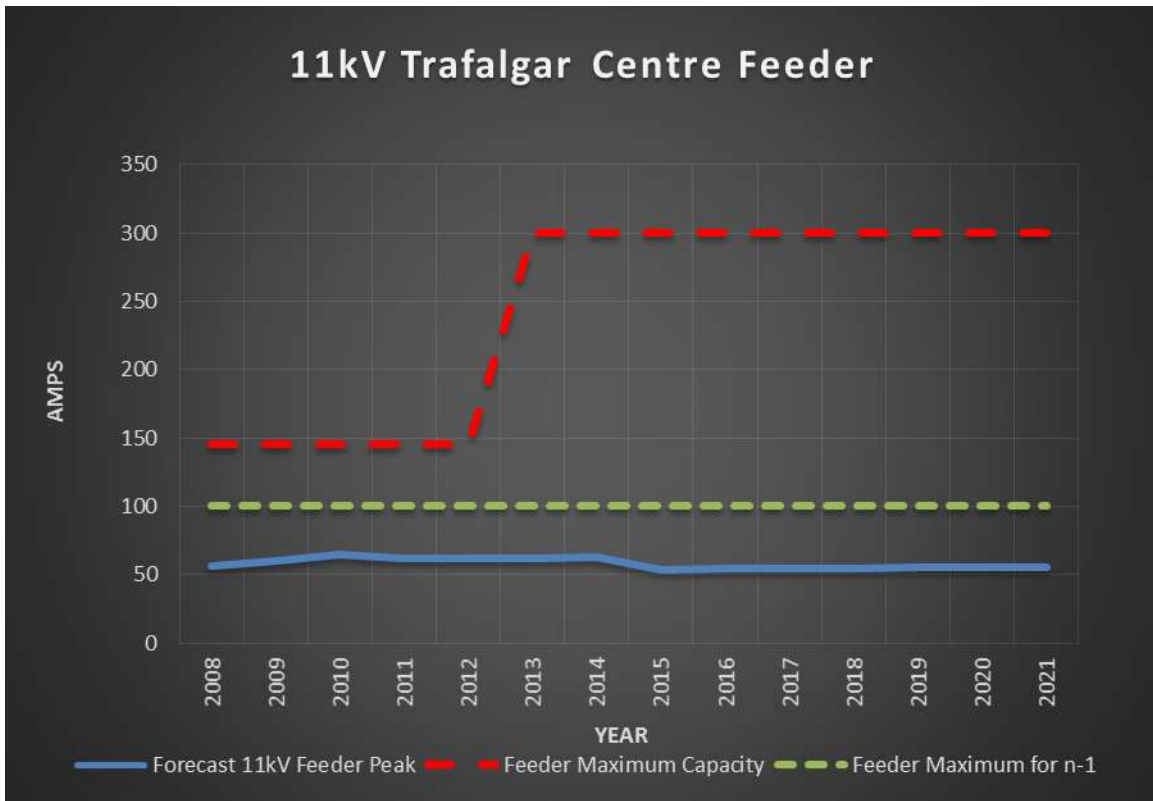



The Trafalgar Centre feeder supplies the Haven Road area and eastern Port area. The load is mostly light industrial and commercial.

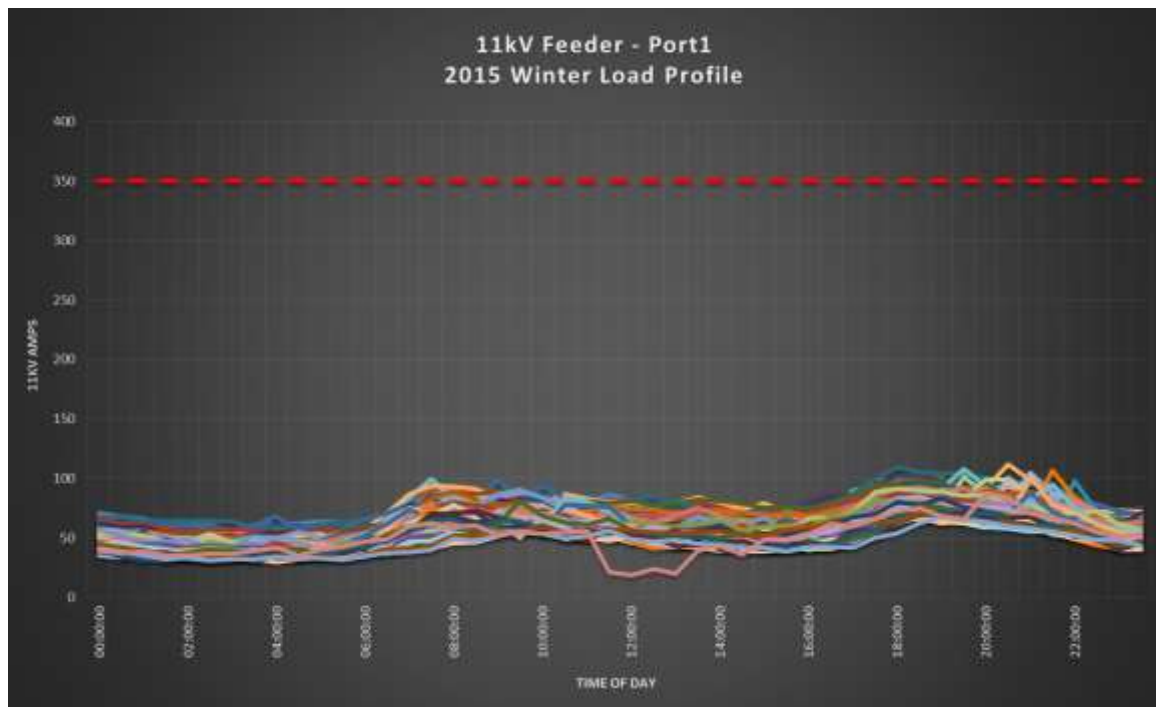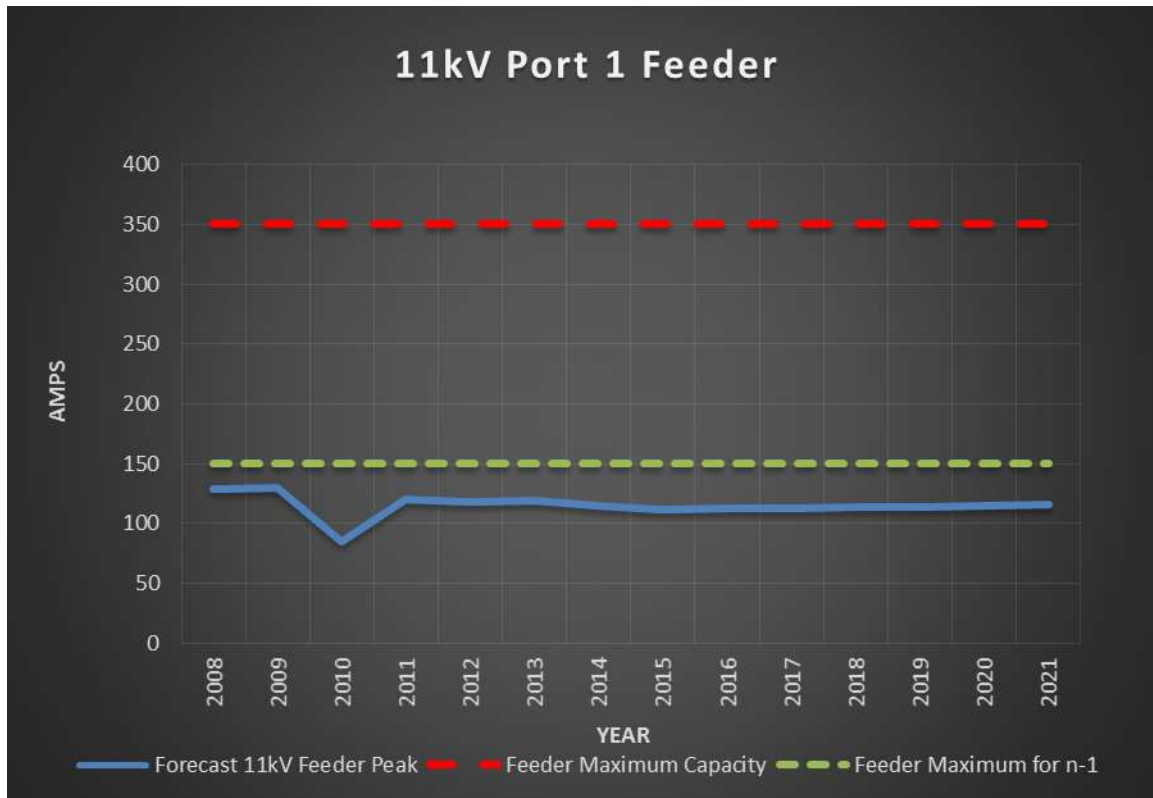



The Port 1 feeder supplies the western end of the Port and Wakefield Quay areas. The load is mostly commercial and light industrial. This feeder provides additional backup supply to the Washington Valley feeder.

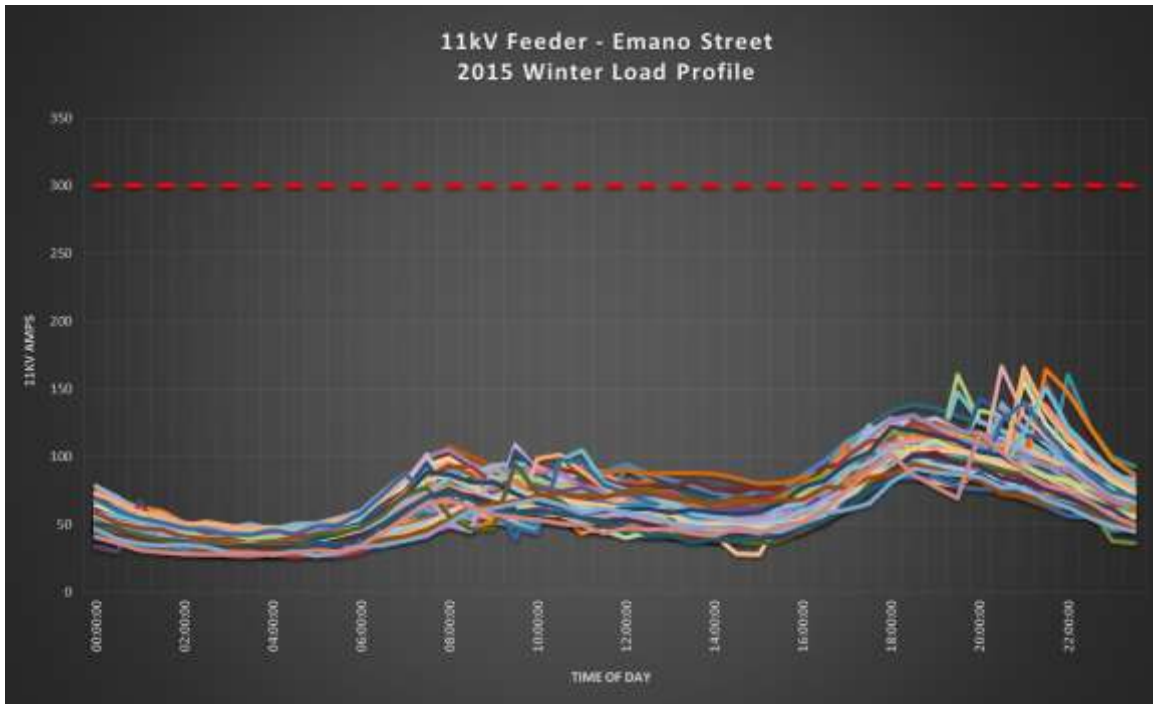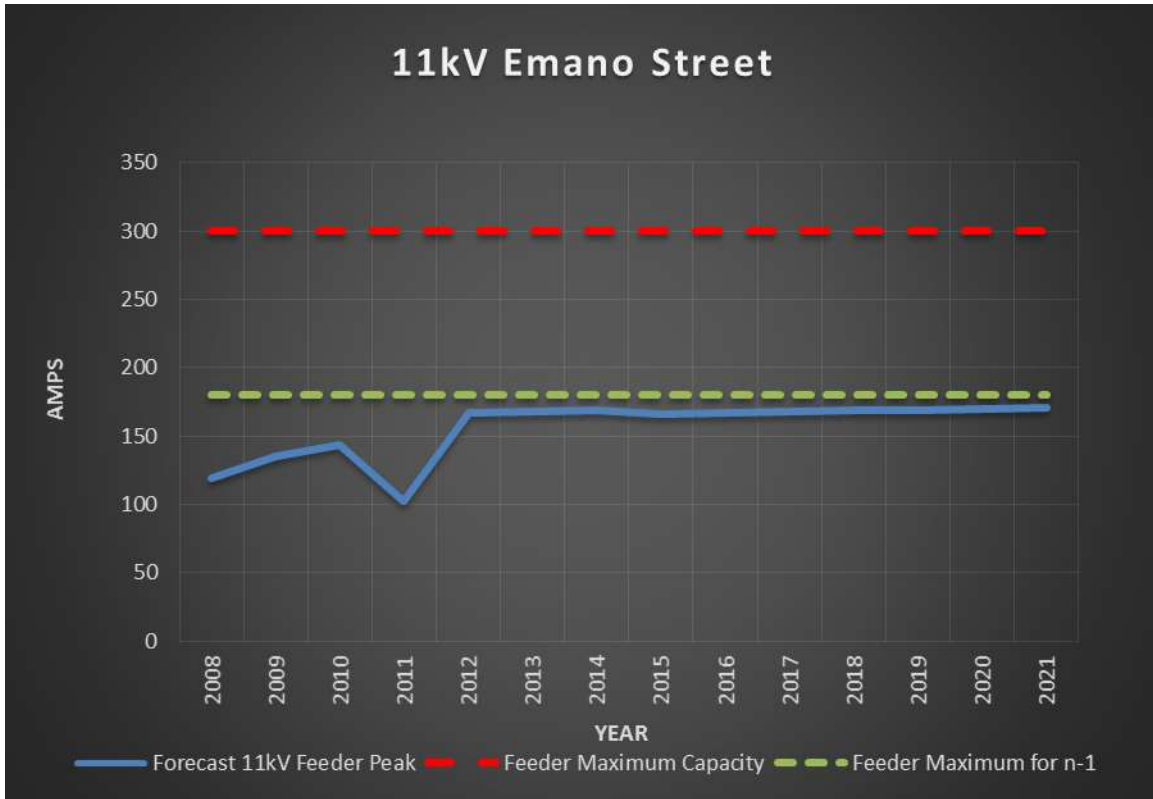



The Emano Street feeder was installed for the beginning of winter of 2005. The demand on this feeder has relieved the load on the Victory Square, Snows Hill and Washington Valley feeders.

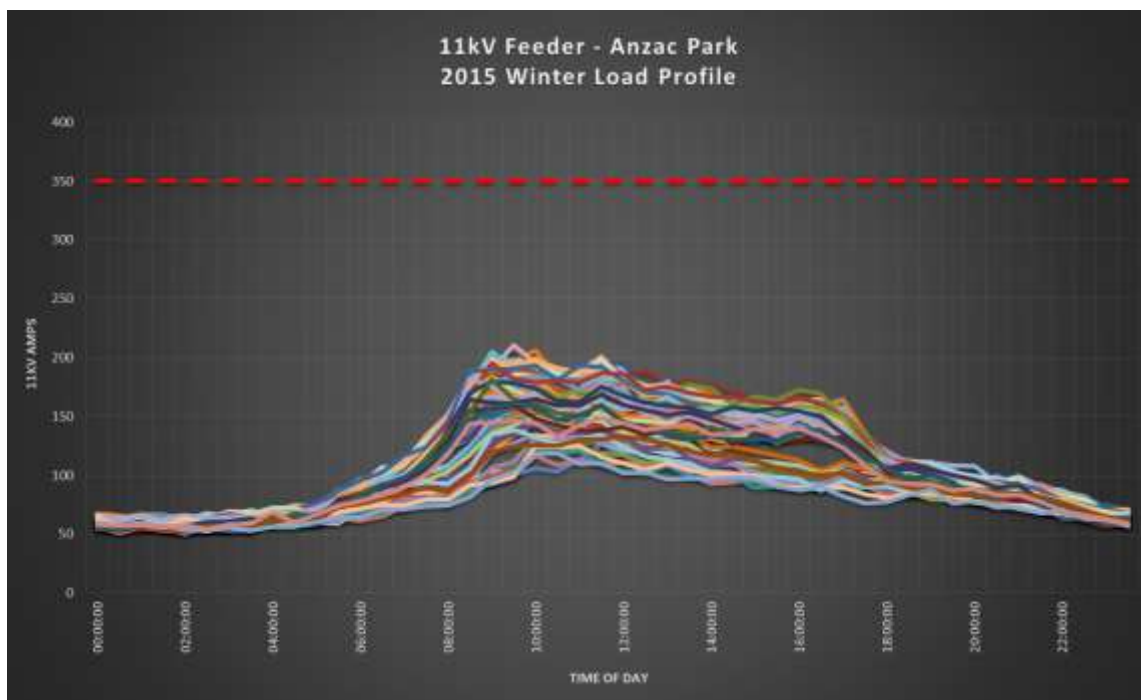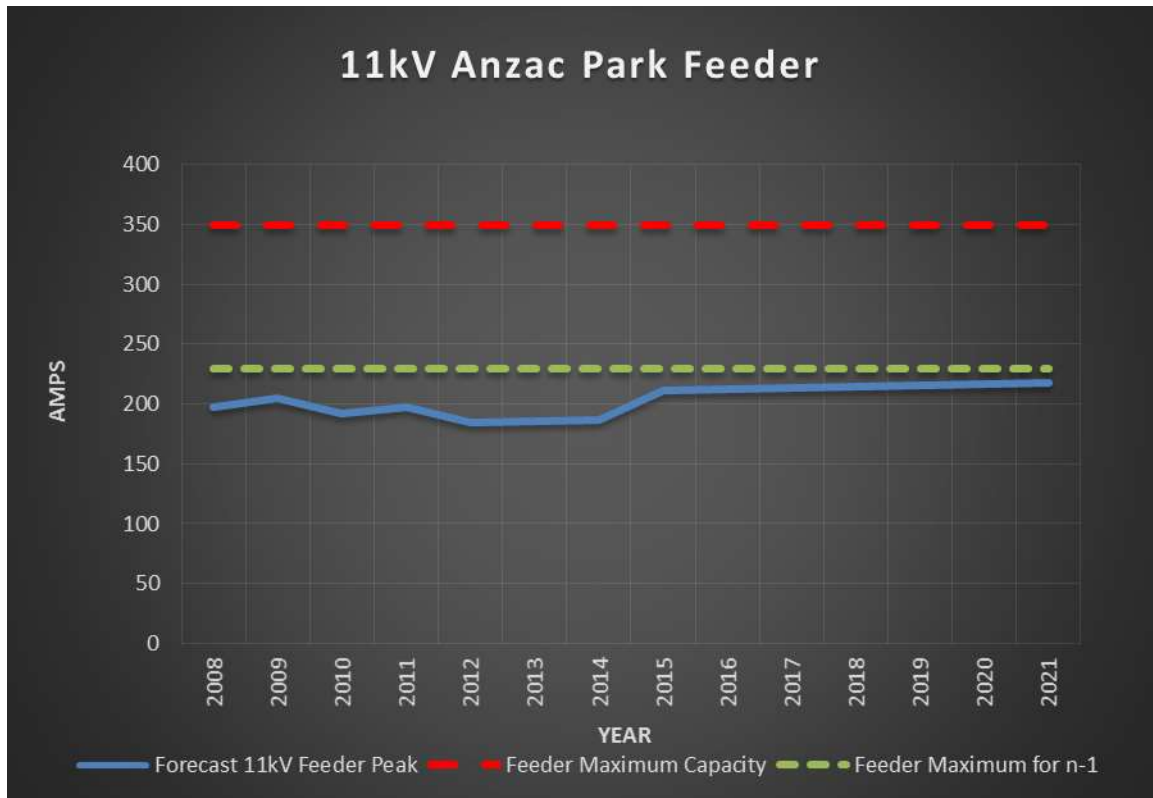

The ANZAC Park feeder supplies the western side of the Nelson central business district and lower Vanguard Street areas. The load is commercial and light industrial. This feeder is also an important back-feeding option for the central business district, Snows Hill and Victory Square areas.

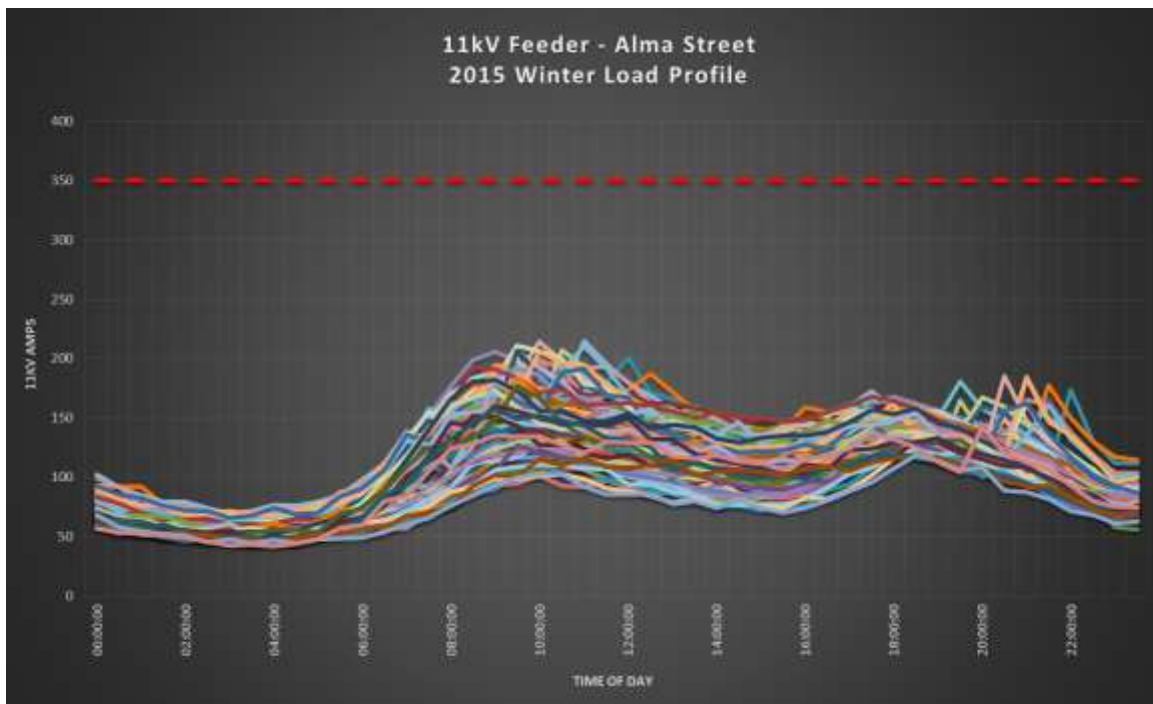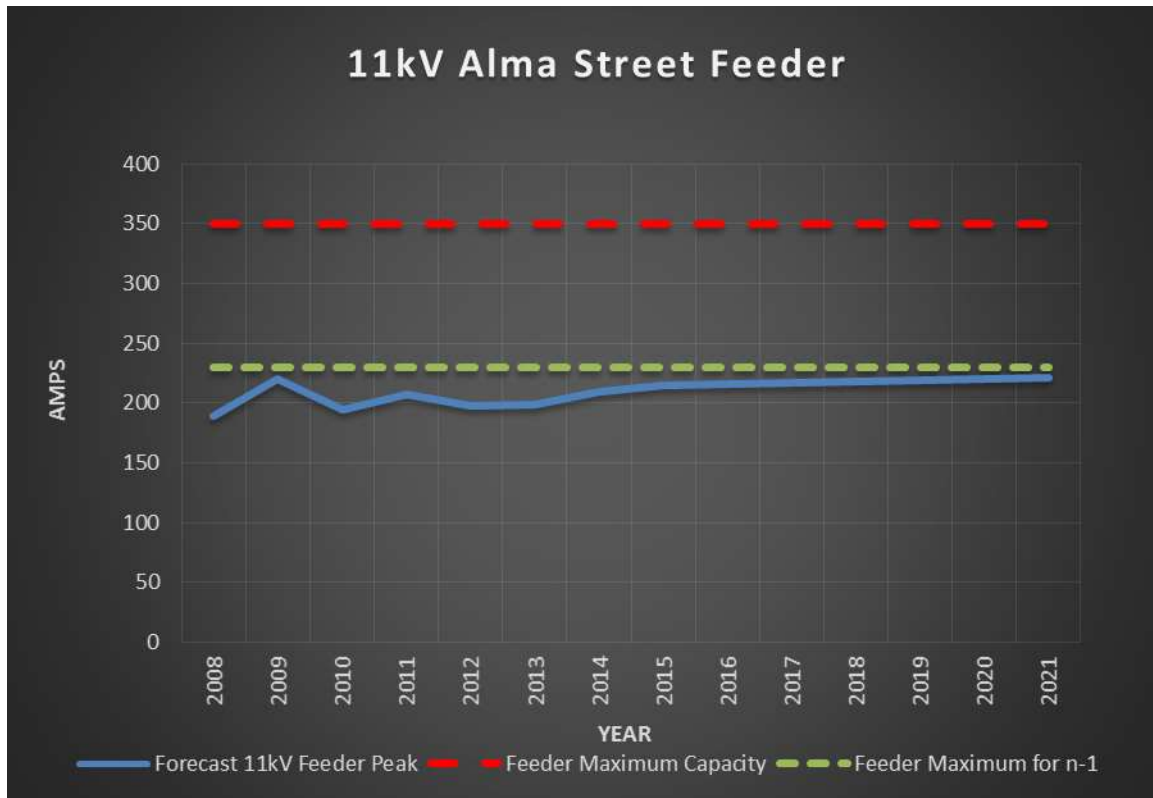

The Alma Street feeder supplies the south eastern Nelson central business district, Nelson Marlborough Institute of Technology and Brook areas. It has a mixture of commercial and domestic load.

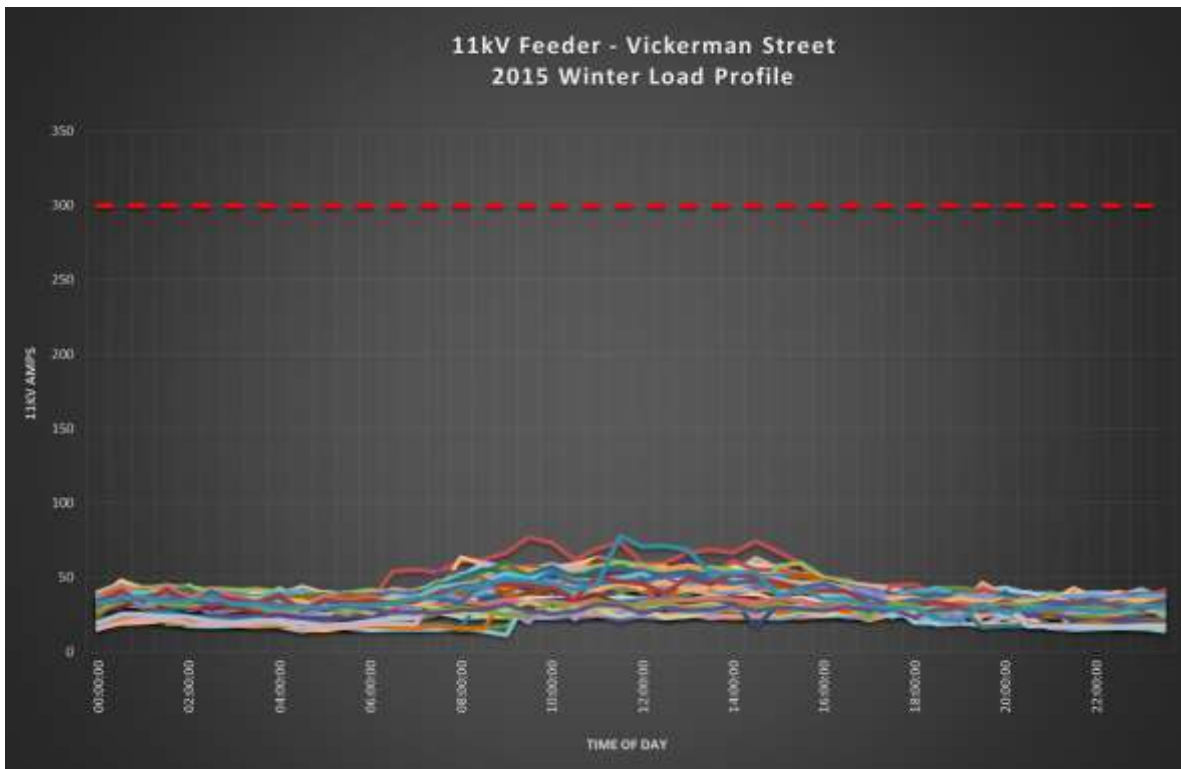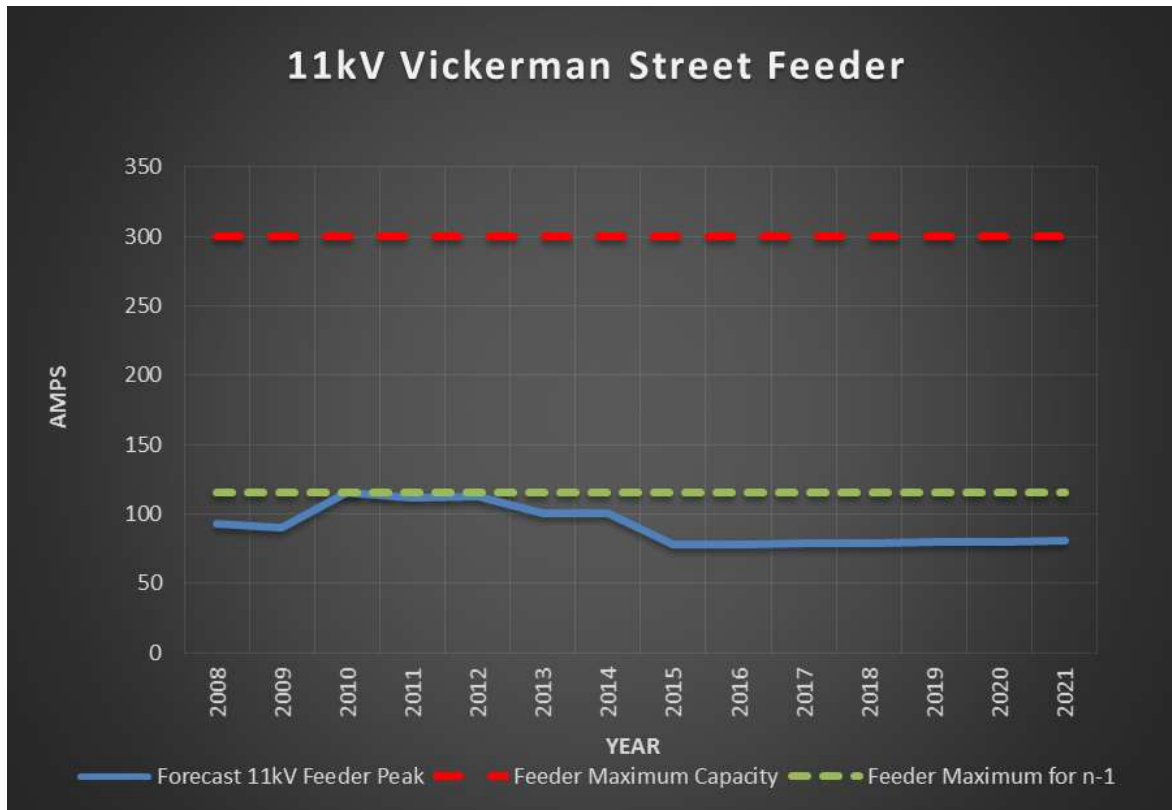


The Vickerman Street feeder supplies the Port area. The load is mostly industrial. This feeder is an important back-feeding option for Sealord's and the rest of the Port areas.

Distribution Transformers

Transformer capacity has typically increased at approximately 0.8MVA per year with recent years continuing that trend mainly due to new developments or upgrades in consumer capacity.

NEL is continually monitoring capacity utilisation and will relocate transformers, particularly larger units, within the network to balance demand with capacity as the opportunity arises or where requested by consumers. Replacement of aging transformers will require the procurement of new spare stock over the 2016/17 year as the existing stock will reach minimum levels.

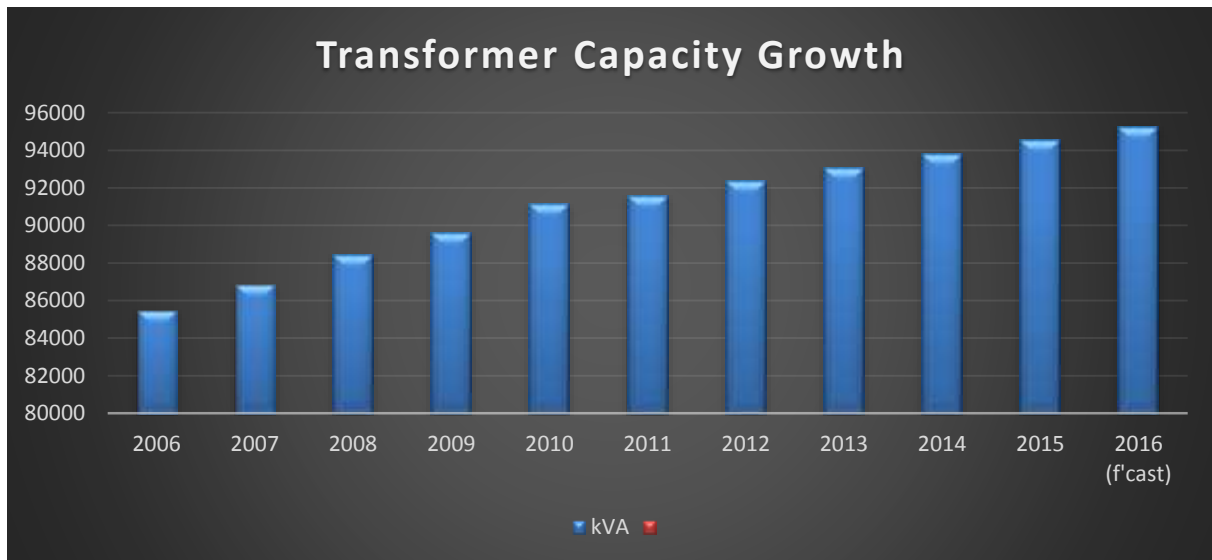

Alternative Solutions

Refer to Section 3.6 – Non-Asset Solutions and 3.7 – Distributed Generation. These sections outline possible methods of reducing peak demand and avoiding additional network investment.

Transpower

NEL is supplied from Transpower's Stoke Substation seven kilometres from the Haven Road Zone Substation. Transpower have undertaken significant work in recent years to ensure the load growth in the top of the South Island is met by the transmission system. The significant addition was a third 220kV line from Kikiwa to Islington and replacement of its aging 220/33kV supply transformers

Network Tasman and NEL share the load at Stoke Substation at the 33kV level. Stoke Substation has an N-1 capacity at 33kV of 136MVA due to transformer capacity. There is currently no apportionment or limit of capacity between the two networks. NEL currently derives its transmission services indirectly through Network Tasman through three 33kV feeders (half of the route being overhead and owned by Network Tasman) as well as directly to Transpower through its own new 33kV feeder. The peak demand at Stoke Substation is forecast to exceed 136MVA in 2017 without any additional mitigation. Resolving a protection issue will reduce overloading in the forecast period. The transformer overloading issue can be further resolved by operational measures and in the longer-term by a possible new grid exit point at Brightwater.



NEL's 33kV transformers arriving in Jan 1960

Both networks utilise load control systems to minimise system peaks. The main use of load control for both Network Tasman and NEL is to minimise the upper South Island (including Christchurch area) transmission peak. This system has worked well and has been in place since 2009. NEL was able to target more effectively its load control times to provide better service for consumers while being able to minimise future transmission costs.

Refer to Transpower's Annual Planning Report –

<https://www.transpower.co.nz/sites/default/files/publications/resources/TPR2015Chapter15NelsonMarl.pdf>

Page 245

5.3 Development Plan

The drivers for development and replacement on the network have been covered in more detail in the Planning Criteria section of this document.

NEL has structured its Development Plan based on the following criteria:

- Network Growth;
- Network Improvement (Reliability, Safety and Environment);
- Network Replacement and Renewal.

In many of the projects planned for the next 10 years, the criteria of Growth, Improvement and Renewal overlap and a single project may well address more than one of these criteria. Therefore, the projects as listed under Capital Expenditure may be equally applicable under another heading. The aspects of the criteria are governed by ongoing and regular indicators such as asset performance and asset audits.

Plans for future ***Network Growth*** or reinforcement are developed from information received of known or planned industrial, commercial or residential growth. Typically NEL finds there is very little advanced warning of imminent growth especially in the industrial and commercial sector which can often occur in less than 24 months.

A key driver for ***Network Improvement*** is asset age. Over 85% of the network is installed underground and much of that underground network was installed in the 1960s and 1970s. This means that over the next 20 years many cables will come to the end of their 45 year theoretical life span.

Areas of ***Network Renewal*** are identified from planned maintenance records, annual load surveys, condition monitoring audits and risk assessment.

Network Growth

There is a steady if small continuous growth occurring on the network and this is being addressed right across the network at the 33kV level and right down to 400 volt level. A load forecast for the network is used to identify future capacity constraints and solutions are developed from that information. Financial and technical options are analysed to identify the best long term solution and then a project planning programme is developed.

Network Improvement

Network Improvement encompasses the areas of reliability, security, safety and environmental issues. Projects concerning safety especially public safety are always treated as top priority. As they are identified, network security and environmental issues are added to the Capital Expenditure plan.

Network Renewal

This criterion covers assets requiring upgrade due to growth or performance and replacement due to age or condition. Renewal projects can often be predicted quite accurately and often condition and age are the prime drivers for the project.

5.4 Capital Expenditure Planning

There is considerable resource put into the development of the capital plan. It is broken down into; growth, improvement and renewal as described above in 5.3. The Plan is also split into the various network categories from 33kV feeders to 400 volt network. The major planning decisions or directions are described below.

It has to be recognised that NEL is a small network by comparison to other networks in New Zealand. The detail of each project outlined is considered appropriate. Detailed descriptions of projects are provided for projects valued over \$200,000. Smaller projects are described as summary only.

11kV Feeders

Of the fourteen 11kV feeders that exit the Zone Substation the majority have been upgraded over the past 20 years and have a rating of 300 amps or above so growth on the network is well covered in this area. The Capital Works programme addresses the replacement of the remaining two aging cables on these feeders within the next 10 years.

11kV Cabling

The age of the 11kV cabling ranges from 1938 to the present time with the bulk of underground network being installed between the 1960s and 1980s. The 11kV cabling is a combination of paper insulated and cross linked polyethylene cables and so the technical end of life for most of the latter will occur within the next 10 years.

The Asset Management Plan addresses the aspects of growth, improvement and renewal on the 11kV network partly through single links between substations or a continuous interconnected number of links. An example of the latter is an 11kV Outer Ring which at present consists of cables rated at less than 150 amps, and has been found to be operationally inadequate in the event of 11kV failures when substantial capacity needs to be back-fed, so is planned for replacement.

11kV Transformers

As the 11kV network was converted from an overhead to underground network, previously pole mounted transformers were refurbished and recycled as ground mounted transformers. This trend continues today and where possible in areas of growth, larger pre-used transformers are utilised to replace those with less capacity. With the continuing growth on the network the requirement for higher rated transformers continues and the number of 100 and 200kVA transformers is now significantly reduced. Nowadays the requirement for 500 and 750kVA transformers is much more common. The Capital Expenditure includes transformer upgrades expected for the next two years and a budgeted figure for the following eight years.

11kV Switches

Following upgrades of older 11kV oil switches to more modern switching technology, the average age of this part of the network has reduced considerably. NEL has deliberately retained oil type switches on the distribution network, but is investigating vacuum or SF6 as alternative types. There are a number of sites tagged for the use of alternative switchgear.

400V Network

Approximately 15% of the 400 volt network remains as overhead reticulation and the remainder is installed underground. The underground network dates from 1937 to the present and, as with the 11kV network, the bulk of the 400 volt network was installed underground between the 1960s and 1980s. Any recent new 400 volt underground projects, apart from subdivisions, have required rigorous cost

justification and therefore they were usually only approved when the installation was part of a cost-share project, usually with the Nelson City Council.

Much of the existing 400 volt network is adequately sized for the load it is supplying, however, in areas where in-fill housing has been prolific some undersized cables are approaching maximum capacity. The other area of concern is the CBD where the age and capacity of the existing network will require reinforcement in the near future. In order to defer immediate expenditure in this area, the existing network is being progressively sectionalised in order to maximise the existing available capacity. However, an ongoing replacement programme for the 400 volt underground network has been established and is outlined below.

At the present time NEL has 135 km of 400 volt underground network which consists of a combination of XLPE and Paper Insulated cables with ODV life spans 45 and 70 years respectively. Based on this data, a replacement programme of 60 years has been allowed to replace the existing 135 km of cable which means that 2.2 km of cable needs to be replaced each year. The average metre cost for cable replacement has been based on a combination of the new cable being installed in a dedicated trench, a shared trench or an existing ductline. Projects in years one to three have been identified while those previously individually identified in the four to 10 year timeframe have been moved into an HV and LV cable replacement programme category. Each year a review of the category will identify and prioritise with more certainty those cables to be replaced in the one to three year timeframe.

The project that identified small pockets of shallow 400 volt underground cable has largely been completed. Any further cables identified during the normal course of business will be addressed on a case by case basis as NEL becomes aware of them.

Capital Expenditure Plan

The Capital Expenditure for the next 10 year period is shown as **Appendix F (Schedule 11A)** and demonstrates NEL’s development and reinforcement of the network. The classification section expands and explains the breakdown by asset category.

The regulatory requirements financial summary for the capital expenditure plan is referred to in section 9.1 of this document.

Classifications

<p>The Development Plan has been divided into six distribution classifications and each has been addressed separately. The classifications are:</p> <ul style="list-style-type: none"> • 33kV feeders; • 33kV Zone Substation; • 11kV feeders; • 11kV cabling • 11kV transformers; • 11kV switches; • 400V network 	<p>The Capital Expenditure Summary is broken into the following classifications to tie up with disclosure requirements and Appendix F (Schedule 11A);</p> <ul style="list-style-type: none"> • Growth • Replacement and Renewal • Relocations • Reliability, safety and environment
---	---

Major Projects

Two major capital projects, being the replacement NEL 33kV/11kV Zone Substation and a fourth 33kV feeder from Transpower’s Stoke Substation, have been completed over the 2013/14/15 financial years. There are no further major projects planned in the foreseeable future.

Growth Projects

Transformer Change Programme

NEL has a transformer replacement programme in place. The need to replace transformers is typically influenced by load changes on the network or transformer maintenance criteria. Long-range change

projections often require alteration if the conditions which apply to either of these criteria happen to change. Typically replacement transformers are installed on the ground and in most cases the only choice to be considered is the product to be used at that particular site. Confirmed transformer changes due to growth are listed below while a number of possible changes are being investigated at the time of writing.

Tukuka Street Transformer Uprate to 500kVA (Growth)

Timing 2016/17

Neale Park Substation Uprate (Growth)

A customer contribution will apply to this project.

Timing 2017/18

Motueka Street East Substation (Growth)

Development in this area is anticipated to continue. Extension of the 11kV network and the installation of a new substation will be required to support the continued growth. Whilst still in development this project is expected to start in the 2016/17 year. **A customer contribution will apply to this project.**

Timing 2016/17

Green Gable Substation (Growth)

This proposal has changed significantly in recent years and will involve smaller incremental growth over a number of years. Whilst not in its final form provision has been made for the installation of new LV cabling to support stage 1. **A customer contribution will apply to this project.**

Timing 2017/18

Akersten Street Substation Uprate (Growth)

A customer contribution will apply to this project.

Timing 2016/17

* * * * *

Replacement and Renewal Projects

A review of the replacement and renewal projects over the 2015/16 year has resulted in re-prioritisation of many. The increased fault capacity of the new Zone Substation coupled with low HV and LV back-feed ability in some areas has raised the risk profile on a number of smaller aged 11kV cables. These cables will be progressively replaced over the next eight years.

Due to the changing priority of cable replacement projects, those previously individually identified in the five to 10 year timeframe have been moved into an HV and LV cable replacement programme category. Each year a review of the category will identify and prioritise with more certainty those cables to be replaced in the one to five year timeframe.

Zone Substation - Snows Hill HV Replacement (Renewal)

The existing cable was installed in 1963. This major feeder supplies the Nelson south area including the College areas and southern fringes of the CBD. It also provides an important back-feed option to Victory Square (which includes the Nelson Hospital) and Alma Lane feeders. The cable is rated at 280 amps. Maximum loading during the winter of 2009 was 200 amps with a small decline since then followed by small but steady growth. The N-1 security of supply level for this cable is close to this limit. This project is necessary to improve back-feed capacity and reinforce supply to the 11kV CBD outer ring.

The small decline in load has allowed the timing of this project to be deferred such that it will be completed incrementally over a number of years with stage 1 being the removal of a substation on the feeder and the installation of a new cable to an interim substation jointing location part way along the route.

The decommissioned section of cable will then be utilised to form an HV link between the 11kV switchboard at the Zone Substation to St Vincent Street North, Gloucester St and Kirkpatrick's substations.

Timing 2017/21

Brook Street - Uprate and UG HV at Tantragee (Renewal)

A short length of overhead HV network near Tantragee Substation is only rated at 125 amps. With future residential expansion predicted along the network “down-stream” of the substation, this span of network will require uprating. It is proposed to replace the overhead line with an underground cable. As this is a spur line the only alternative is replacement of the aerial line.

Timing 2016/17

Gloucester Street - Kirkpatrick's HV Replacement and LV (Renewal)

Coupled with the Zone Substation to Snows Hill feeder programme, it is proposed to utilise the disused feeder to form a link between Kirkpatrick's substation and Gloucester Street substation. This would enhance the size of the existing feeder between these substations and remove an at risk cable from the network. In this case an existing asset is being “recycled” to provide a secure feed which is the most practical and economic option as opposed to a new cable. Provision will be made for future LV replacement.

Timing 2017/21

Hardy Street West - Kirkpatrick's HV Replacement (Renewal)

The existing paper insulated cable which was installed in 1966 is rated at only 145 amps on a section of fringe central business district network which could be used as an alternative supply route into the central business district and beyond. It is proposed to up-rate this HV link with a more substantially rated cable. There is no optional route for the 178 metre length of cable.

Timing 2019/20

ABC Substation – Victory Square Substation HV Replacement (Renewal)

The existing 185 mm² cable was installed between the NEL Zone Substation and Victory Square in 1981 but is now under-sized for that purpose. However, it will be re-utilised between ABC Substation and Victory Square Substation to provide a supply route to an increasingly commercial but also industrial and residential customer base. An optional route for the replacement cable would not be economically practical.

Timing 2020/21

Griffins – Nile Street Bridge HV Uprate (Renewal)

The majority of the existing circuit was installed 1977 and this forms a significant back-feed option for the New Street feeder into the spur fed Maitai Valley. As part of the circuit is only rated at 145 amps it is now regarded as under-sized for that purpose. An optional route for the replacement cable would not be economically practical.

Timing 2017/18

Zone Substation –Victory Square HV Replacement (Renewal)

The existing 185 mm cable is now not adequately sized to provide the capacity that could be required at Victory Square Substation under fault conditions as a back-feed path. Part of the existing cable will be re-utilised in the ABC Sub to Victory Square link (See above).

Timing 2019/20

Service Box Replacements (Renewal)

A full audit of all existing LV Service Boxes and the bulk of any replacements was completed as part of a replacement programme in recent years. An on-going audit and replacement programme has been put in place to maintain the safety and reliability of these assets on the network.

Timing Ongoing

* * * * *

Asset Relocations

St Vincent Street North (Relocation)

This substation will be relocated a few metres from its existing location as part of a Nelson City Council enhancement project. NEL and Nelson City Council will share the cost of relocation.

Timing 2016/17

Normanby Bridge Substation Relocation (Relocation)

Following recent seismic surveys of the network and Christchurch's experience of failures of infrastructure near waterways it has been decided to relocate this substation away from the banks of the Maitai River and reconfigure the existing 11kV network in the area to suit the change.

Timing 2023/24

* * * * *

Improvement Projects (Reliability Safety and Environment)

Gloucester Street LV reinforcement (Security)

Gloucester Street substation is a heavily loaded spur fed substation with a mix of Industrial, Commercial and residential customers. There is limited LV back feed capacity. A new LV link will be installed between St Vincent St North and Gloucester Street substations to improve security of supply. Advantage is being taken of a planned Nelson City Council upgrade project to minimise civil costs.

Timing 2016/17

Brook Street – Scotland Street Link Box to Tantragee Sub HV Link (Security)

It is proposed to install a second 11kV cable between these two substations to provide an alternative 11kV supply to the top of Brook Street where significant development has occurred in recent years. This project will be completed as a programme over several years initially installing ducts in association with a Nelson City Council project to minimise overall civil costs. Existing spare ducts will be utilised where possible.

Timing 2016/22

Brook Street - Tantragee Sub to Brook Street 504 Sub HV Link (Security)

It is proposed to install a second 11kV cable between these two substations to provide an alternative 11kV supply to the top of Brook Street where significant development has occurred in recent years. Existing spare ducts will be utilised where possible.

Timing 2022/23

Locking Street – Wellington Street (Security)

It is envisaged that a new link will be installed in the HV network between Locking Street substation and Wellington Street via an existing ductline. This link will remove an existing HV spur line from a dense residential urban area of the network. As the ductline will be existing by the time of these works, no other practical route has been contemplated.

Timing 2020/21

Substation LV Board Replacements (Quality)

In order to provide LV protection for distribution transformers, operational flexibility, improve SAIDI statistics and remove potential hazards in substations, LV boards are being progressively upgraded. The majority of substations have already been addressed but others still require attention.

Timing Ongoing

Emano Street North Link Box Tripping VCB (Security)

In order to improve on outage durations in this area of the network and improve overall SAIDI statistics there is a requirement to upgrade the existing non-tripping switch to a tripping type fitted with Over Current and Earth Fault protection at the above site. This item has been included in this Plan for a number of years and finally suitable vacuum circuit breakers and switches are appearing on the market. It is expected that the new technology will meet the requirements of the project.

Timing 2020/21

Abraham Heights HV Link Box (Security)

As preparation for the replacement of the HV network in the Abraham Heights area, a new HV Link Box will be installed at the Montreal Road intersection to provide a switching point for existing and new HV cables.

Timing 2018/19

Wellington Street HV Link Box (Security)

To enable more flexibility and efficiency during HV switching operations and to improve SAIDI statistics and safety, it is proposed to install a ground mounted 3-way HV link box as part of the Locking Street HV Cabling project

Timing 2018/19

Trafalgar Street HV Link Box (Safety)

This oil filled switch is one of two older units remaining on the network and is in a high foot traffic area. As suitable alternatives to oil filled switches have become available it is planned to replace the two remaining older switches with newer vacuum or SF6 units to enhance public safety in this location.

Timing 2018/19

Hathaway Terrace HV Link Box (Safety)

This oil filled switch is one of two older units remaining on the network and is in a high foot traffic area. As suitable alternatives to oil filled switches have become available it is planned to replace the two remaining older switches with newer vacuum or SF6 units to enhance public safety in this location.

Timing 2017/18

* * * * *

400V Replacement

In general 400V reinforcement applies to existing assets that are being upgraded resulting in improvements to the existing. Consideration is given in each case to alternatives but in most cases the choices are between the suppliers of a similar product. As cable routes are typically short, few variations are available for consideration and existing route is typically adopted as the most practical. A review of these projects during 2015/16 has resulted in higher priority projects being planned over years one to three. Replacement of aging cables will be an ongoing project but these will be identified and prioritised in the medium term planning cycle, therefore, works in the four to 10 year timeframe have been categorised as a cable replacement (programme)

Bridge Street East LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2016/17

Hardy Street East LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2016/17

Hardy Street West LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2017/18

Trafalgar Street Central LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2018/19

Trafalgar Street North LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2018/19

Trafalgar Street South LV Sectionalisation (Security)

Existing service boxes and tee joints are to be replaced with LV link/fuse boxes to enable the existing LV circuits in this area of the CBD network to be easily sectionalised in the event of an LV cable failure. Removal of the tee joints has the added benefit of moving the premises Network Connection Point onto the Road Reserve instead of at the Main Switch Board.

Timing 2018/19

* * * * *

Overhead to Underground

Arrow Street North - Washington Road HV/LV Conversion (Overhead to Underground)

This section of network is the only remaining aerial line on the Washington Road Feeder and being on a busy road and close into the Zone Substation puts the rest of the circuit downstream into the Port Hills and Wakefield Quay at some risk. An optional route for the replacement cable will be considered at the time of final design.

Timing 2019/20

Toi Toi Street Underground HV/LV (Overhead to Underground)

There are existing spare ducts both sides of the street over the route and some of the dwellings already have underground cables installed to them. In order to utilise the existing ductlines and avoid further aerial maintenance it is proposed to replace this section of aerial network with underground cabling. Replacing the aerial network is another option but the existence of ductlines assists in making the underground option justifiable.

Timing 2020/21

* * * * *

Opportunities for Distributed Generation

NEL will facilitate, where practical, any opportunities for distributed generation on the network.

Given the dense urban nature of the network it is almost certain that all distributed generation will be small scale solar on residential buildings or a few larger arrays on commercial buildings. Although NEL itself is not planning any distributed generation, it welcomes approaches from promoters of distributed generation that would enhance the value of operations.

SECTION 6 - Life Cycle Asset Management Planning

6.1 Introduction

NEL has adopted a Condition Driven Maintenance approach to its network operations. Condition Driven Maintenance is based on the results of risk modelling against the Asset Performance Standards. Where an asset has to be replaced, the removed asset is modelled to determine whether it is to be deployed or suitable for re-deployment elsewhere on the network. The projected Asset Maintenance expenditure breakdown is detailed below. Because the major asset groups have been divided equally to fit the audit period, the projected budget is very much cyclic and apart from major maintenance, like 33kV/11kV transformer overhauls, will remain much the same each year.

Operational Expenditure Forecast

Operational Expenditure Forecast		
Planned Maintenance		
Description	2015/16 Est	2016/17
400V Lines & Cables R & M	\$150,000	\$238,806
11kV Lines & Cables R & M	\$92,000	\$47,003
33kV Lines & Cables R & M	\$10,000	\$27,785
11kV/400V Subs R & M	\$40,000	\$92,581
33kV/11kV Subs R & M	\$6,000	\$25,602
Control Room	\$10,000	\$15,926
Tree Trimming	\$30,000	\$31,157
Other incl Fixed Contracts	\$140,000	\$111,140
Total Planned Mtce Costs	\$478,000	\$590,000
Unplanned Maintenance		
Description	2015/16 Est	2016/17
Service Fuses	\$15,000	\$12,000
S/Box Failure/Damage	\$12,000	\$12,000
400V Line /Cable Fault	\$22,000	\$60,000
11kV Line /Cable Fault	\$10,000	\$18,000
33kV Line /Cable Fault	\$5,000	\$7,200
Transformer Fault	\$12,000	\$10,800
Total Unplanned Mtce	\$76,000	\$120,000
	2015/16	2016/17
Total	\$554,000	\$710,000

The operational expenditure budget is derived based on the expected works as a result of the planned preventative maintenance programme, asset auditing and any unplanned maintenance as a result of an asset failure.

NEL uses the Electricity Distribution Services Input Methodologies Determination 2012 as a guide to life expectancy of an asset. Asset auditing and maintenance is used as a final determination as to when an asset is retired from the network. It is noted that there is a significant difference between the life expectancy between different types of cable XLPE versus PILC. A summary of the 2004 ODV Handbook asset life expectancy is included in Section 3.3.

6.2 Maintenance Inputs

The development of the plan is driven by the following key inputs:

- Planned Preventive Maintenance programme;
- Asset Auditing Programme;
- Annual Load Survey;
- Regulatory Compliance;
- Risk modelling against the Asset Performance Standards (refer Risk Management section 7).

6.3 Maintenance Types

Typically the main types of maintenance are:

- Planned Preventive Maintenance;
- Planned Maintenance;
- Unplanned Maintenance.

Planned Preventive Maintenance

Refer Network Development Planning - Planning Criteria (section 5.1).

Planned Maintenance

The Planned Maintenance works program is a result of assets modelled not meeting Asset Performance Standards. The work list is prioritised from worst score to best. Any asset meeting standard will be audited as per the auditing cycle for the asset type.

Unplanned Maintenance

Unplanned maintenance results from faults or outages where there is no prior warning of the event and may typically be caused by external forces such as storms, contractors or accidents. The emphasis is to restore power as quickly and safely as possible and for follow-up planned maintenance to restore the asset to a condition that meets the Asset Performance Standard.


6.4 Auditing and Maintenance by Asset Type

The Auditing and Planned Maintenance checks are carried out by contractors filling out pre-printed sheets with check boxes for each type of asset. On completion of the daily checks, the sheets are returned to the office for punching into the Office Management System. All assets are audited on a longer term basis but major assets receive a regular Planned Maintenance check at shorter intervals.

Poles

As at 25 February 2016, the network comprised 88% underground and 12% overhead reticulation. The overhead network consists of 872 poles.

NEL HV and LV Poles

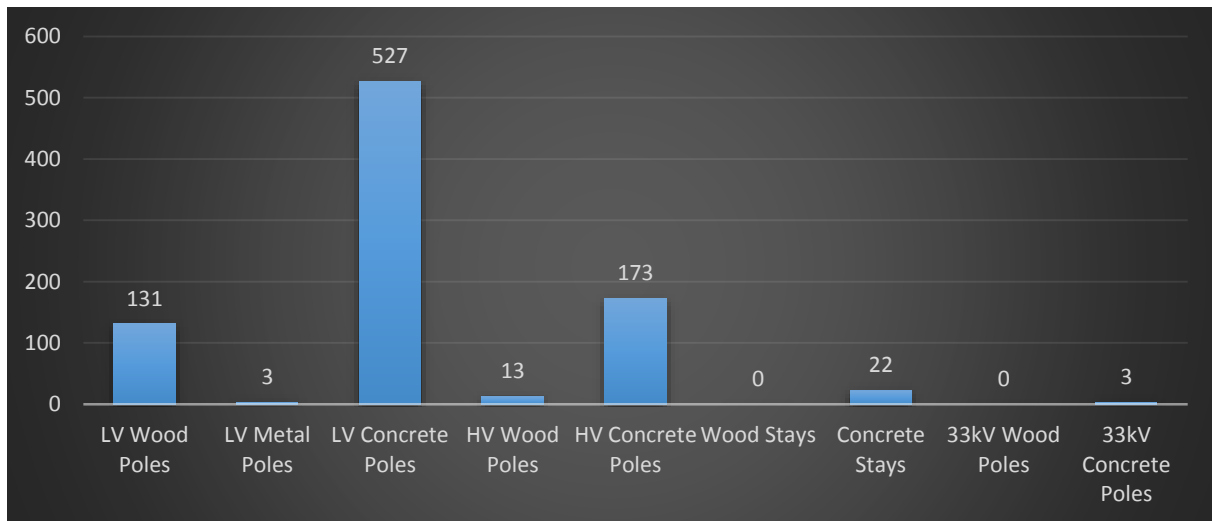

33kV Poles

NEL has removed the last of its 33kV wooden poles in recent years as part of the new 33kV feeder from Transpower's Stoke Substation project leaving only the terminal structure poles of the overhead circuit.

11kV Poles

Concrete poles are audited every five years and the connections viewed through a heat gun. The audit of the concrete pole is purely visual and covers the pole, cross-arm and fittings. Wooden poles are audited every three years and the connections viewed through a heat gun. The audit of wooden poles includes a below ground test of the pole by driving a spike and a visual inspection of the pole, cross-arms and fittings.

400V Poles

Concrete poles are audited every five years and the connections viewed through a heat gun. The audit of the concrete pole is purely visual and covers the pole, cross-arm and fittings. Wooden poles are audited every three years and the connections viewed through a heat gun. The audit of wooden poles includes a below ground test of the pole by driving a spike and a visual inspection of the pole, cross-arms and fittings.

In the event of any pole being rated at a remaining life span of less than five years, the pole will usually be replaced or the next audit will be set for a shorter period. Any resulting repair or replacement will ensure the overhead network meets standard.

Aerial Conductors

The aerial network is primarily copper conductor apart from an 11kV feeder which is steel.

NEL is supplied by Network Tasman through 7.0 kilometres of 33kV line back to Transpower's Stoke Substation. Network Tasman carries out the maintenance of the lines at NEL's cost. All of the 33kV lines are well maintained and in good condition.

The 11kV overhead network totals eight kilometres of line. This is all copper conductor apart from a 1.85 kilometre line to Fringed Hill, which is steel. Generally these lines are situated in areas that are remote or protected from the direct influence of any salt-laden wind. The most remote and rural portion of the 11kV network is the spur feeder in the Brook Valley. The Fringed Hill line is a spur feed off the Brook Valley feeder and can in certain circumstances, be exposed to falling trees and forest fires, as it runs through a pine plantation and then scrub country. In all, a total of thirteen faults have occurred on the



**Stoke-Nelson transmission line
1954**

11kV aerial network in the past five years. Three of these faults were caused by asset failures while the remaining none were caused by animal/bird strikes, adverse weather or third party interference. Measuring against the appropriate Asset Performance Standard will ensure these types of faults are kept at acceptable levels.

The 400V aerial network consists of 30 kilometres of lines, which are all copper conductors. The condition of these lines varies throughout the network and although the conductors are in sound condition, in some areas the cambric insulation is separating from the conductors. NEL's approach to this problem has been to strip the insulation off the conductors to improve the aesthetics of the lines. Historically trees have been the main source of outages on these lines but the threat from trees has been monitored and addressed much more stringently in recent years.

Tree Trimming

NEL previously trimmed trees within the limits of the law of the time, however, the new law has clarified tree owner and line company roles more specifically and although the initial trimming cost has been forced on the line companies, the ongoing cost for trimming privately owned trees will fall on the tree owner. Approved tree trimming contractor's carry out tree trimming around the lines where required. Although trees historically play only a minor part in outage statistics and the economics of trimming are probably not justified, the issue of public safety always forms a major consideration the company.

A separate database has been formed to track all details pertaining to trees which are of interest to NEL.

Aerial lines are not audited in the technical sense but any deterioration in their visual condition and the proximity to trees to the line is noted as part of the pole audits.



Trees close to powerlines Feb 2007

Underground Cables

As mentioned previously, approximately 88% of the network is underground with a total length of 296 kilometres of cable (including dedicated streetlight cable). The cable conductors are a mixture of copper and aluminium and the insulation used has been primarily paper, PVC and cross-linked polyethylene (XLPE). The underground network is in good condition and the paper insulated cables in particular have given good service. The earliest cables installed were paper insulated, but in the early 1970s PVC and XLPE became the trend and all 11kV and 400V cables installed between that time and 1997 were XLPE, when it was deemed that all new 11kV cables installed were to be paper insulated. However, as of 2015 all cables installed will be XLPE.

The earlier 33kV cable network comprising three feeders was installed between 1979 and 1987 and has given reliable service. A new 33kV feeder was installed in 2013/14. Health checks are carried out on all of the 33kV cables annually. To date no potential problems in the cables and joints have been identified.

NEL operates 74 kilometres of 11kV underground network. The conductors used have been a mixture of aluminium and copper, the preference being mainly driven by cost at the time. Industry information relating to XLPE cables resulted in NEL taking a more cautious approach to the installation, commissioning, testing and fault finding on XLPE cables, resulting in a preference for paper lead cables over a number of years. However, paper insulated cable manufacture within NZ has ceased, therefore, new works will generally utilise XLPE cables.

As with the 11kV network, the 400V cable types have changed from paper insulated to XLPE over the years. The XLPE cables have performed well on the 173 kilometres of 400V underground network and the only technical issues to be addressed have been a change to bi-metal lugs and sleeves at terminations and joints. Some early resin joints and older pitch filled joints have failed over the years but the low numbers and intermittent nature of these faults have not given any cause for alarm.

There has been a problem with aluminium sheathed cables in one area of the network which is subjected to saltwater, however further work has been carried out to identify other areas with similar cable types and environmental conditions and these cables have been found to be in good condition.

33kV Cables PD Testing

This test involves four 33kV feeder cables. To date these cables are audited by way of Partial Discharge testing every two years. Previous discharge test results are then compared to the latest results for signs of degradation and a recommendation for the next test date made.

11kV Cables PD Testing

This test involves thirteen 11kV feeders from the Zone Substation and approximately 20 other cables from the major switching stations. From time to time other random samples are tested. To date these cables are audited by way of Partial Discharge testing every two years. Previous discharge test results are then compared to the latest results for signs of degradation and a recommendation for the next test date made.

400V Cables PD Testing

These are not tested or audited in any planned programme.

33kV Zone Substation

The old NEL Zone Substation was replaced in 2013/14 with a modern fully indoor bunded substation. The building fully complies with the latest natural disaster, fire and security building codes. It is a secure environment for the operational equipment and is expected to provide long term reliable service for NEL.

Once commissioning was complete any defects were rectified during the contract defects liability period before being handed over to NEL in 2015. The previous Zone Substation weekly checks have been replaced with a monthly routine inspection. Any defects will be programmed for immediate action. Commissioning tests on all the equipment will be compared with an ongoing monitoring regime to highlight any deviation from expected performance measurements.

The existing building and control room continues to be utilised for operational purposes.

33kV/11kV Power Transformers

The new Zone Substation supplying Nelson Electricity contains three Wilson 16/24 MVA ONAF transformers.

A visual audit of the transformers is carried out as part of the substation monthly checks. Oil tests will be carried out annually.

33kV Switchgear

The new 33kV switchgear is fully enclosed and virtually maintenance free. Visual inspections will be carried out as part of the substation monthly checks.

Zone Substation 11kV switchgear

The new 11kV switchgear is fully enclosed and virtually maintenance free. Visual inspections will be carried out as part of the substation monthly checks.

Zone Substation Protection

The new zone substation protection is high speed, secure, microprocessor based relays with a number of features not previously available on older protection systems. The system is expected to reduce fault clearance times, provide detailed fault related information, improve safety and be maintenance free. Visual inspections will be carried out as part of the substation monthly checks.

11kV Auto Recloser

NEL owns only one auto recloser which is located in a rural portion of the 11kV feeder in the Brook Valley and which was replaced with a modern recloser during 2006. The recloser is monitored via the SCADA system and receives a six monthly check as part of the Planned Preventive Maintenance schedule.

11kV/400V Substations

The 11kV network supplies 198 11kV/400V distribution substations. The rating of these assets ranges from 1500kVA three phase to 5kVA single phase in capacity. All pole-mounted substations have Chance type dropout HV fuses and all ground-mounted substations are connected to a fused switch located locally or remotely. All ground-mounted substations have 400V fuses associated with them and in most cases utility boards with Maximum Demand Indicators mounted on them.



Bronte Street substation 1950 – still in use today

The enclosures for ground-mounted substations include concrete block buildings, underground concrete chambers, padmount enclosures, fibreglass covers, outdoor fenced enclosures and transformer rooms in the case of single customer substations.

The majority of the transformers were manufactured in the 1960s and 1970s. Regular monitoring, maximum demand readings and temperature checks, are carried out during Planned Preventative Maintenance. Oil testing of non hermetically sealed 11kV/400V transformer above 100kVA is carried out every five years. Over the past 10 years only three distribution transformers have failed in service. One of the failures was attributed to the substation chamber being flooded after a burst water main, one caused by an HV winding failure from a manufacturing fault and the other by loose LV connections within the transformer tank. This signifies that the transformers are in good working condition with generally unforeseen events causing failures.

The substation earths are tested to ensure that they are 10 ohms or less. Where this standard is not met work is scheduled to bring the earthing up to standard. Earths are audited as part of the Auditing Programme. If the 10 ohm standard cannot be achieved, a warning notice is placed on the equipment involved and a similar notice entered onto the asset database.

MDIs are fitted to 95% of three phase distribution transformers and provide valuable feed-back on the peaking loads. Any anomalies detected are checked by installation of a portable data logger. The half-hourly logger information provides the basis for upgrades and network reinforcement.

There are several types of Air, Oil, Vacuum and SF6 HV switches utilised on the network. They provide an interruption point between the rest of the network and the Zone Substation and are linked via alarm circuits to the Zone Substation.


At the other distribution substations a variety of oil, SF6 and air HV switches and fuses are used. These include ABB SD, Hazemeyer and Merlin Gerrin switches. The condition of these switches is regularly monitored with the six monthly Planned Preventive Maintenance cycle and five yearly testing programmes.

The 400V fusing at the substations typically utilises Jean Mueller, Weber and Effen fuse units. These are reliable and require little maintenance and are progressively replacing the older style porcelain J fuse. For installations that only require one or two LV outputs, the three-phase break version of these fuses is being used.

LV Boxes

As at 14 March 2016 NEL has 2,386 LV boxes on its network. A breakdown of box types is shown.

LV Boxes

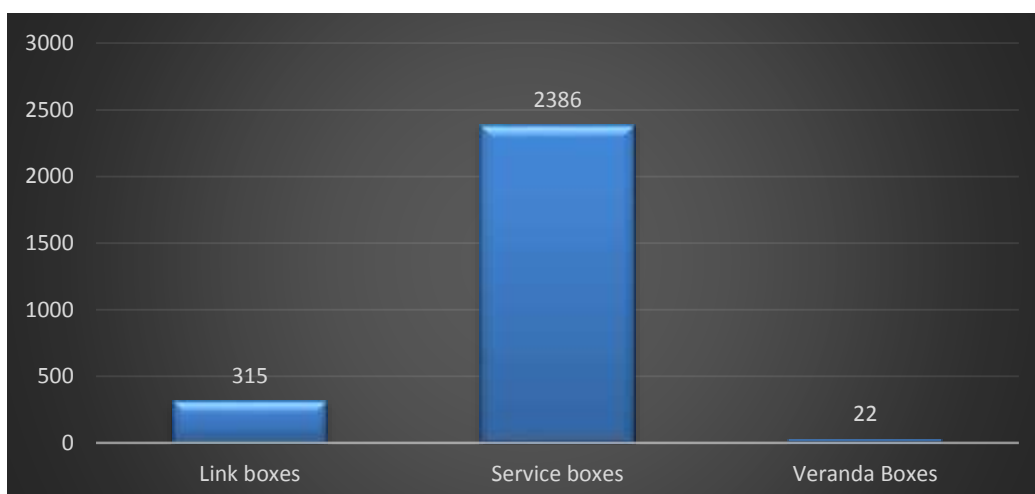

All distribution boxes including Link Boxes and Service Boxes receive a two yearly visual audit and all have a five yearly visual and heat gun audits. Consideration will be given to extending or reducing the audit cycle time depending on future asset auditing results.

During 2015, 439 LV Boxes were audited. Those that did not meet the Asset Performance Standard were either repaired or replaced where urgent or scheduled for repair or replacement according to Risk Number.

Ripple Generators

Nelson Electricity has replaced the two rotating Ripple Generators on the network with one static ripple injection plant located at the Haven Road Zone Substation.

Ripple signal tests were carried out as part the new static plant installation indicating there is good strength coverage across the network.

6.5 Network Connection Points

Single-phase residential installations are typically fused at 63 amps. With the possible introduction of new tariff structures through changes in pricing strategy, a wider range of residential and business fuses may have to be considered. These assets are included within the distribution box and pole auditing that is carried out on a regular basis.

Each time a pole fuse is changed the replacement is an HRC fuse.

In the central business district area of the network there are many cases where tee joints on 400V feeders in the road reserve feed directly to the customer's switchboard. This is of concern for network operations. These connection points are being relocated outside into Distribution Boxes as re-development occurs.

6.6 New Technology

NEL has standardised on proven technology and equipment in the construction and maintenance of the network.

As technology changes and equipment is updated, Nelson Electricity analyses the new trends for efficiency and cost effectiveness against current options/practice.

NEL utilises specialist contractors to carry out Thermovision and partial discharge testing on the network as part of the routine maintenance regime.

SECTION 7 - Non-Network Development, Maintenance and Renewal

7.1 Introduction

This section provides a summary of non-network assets. These are material assets that are necessary and used for the purpose of management of the electricity distribution network.

7.1 Non Network Asset Description

Nelson Electricity has a number of non-network assets that support the management of the network. The material assets (assets greater than book value \$5,000) are listed below:

Office Building – 63 Haven Road

Vehicles – two Toyota Ravs

7.2 Non Network Asset Development, Maintenance and Renewal Policies

NEL has three key areas of non-network asset expenditure being accommodation, vehicles and computer hardware/software. There is a practise of ensuring staff are provided with appropriate working conditions and having appropriate equipment to undertake their roles.

Non-network assets are maintained in good working order during their expected economic life. At the end of their economic life, non-network assets are replaced unless they are rendered obsolete or redundant due to a development initiative.

All expenditure has to be justified to the NEL Board.

7.3 Description of Material Capital Expenditure or Maintenance Projects

There are no large individual non-network asset capital expenditure projects or significant maintenance projects planned for the next five years.

SECTION 8 - Risk Management

8.1 Introduction

NEL places a high focus on Risk Management as the tool to an efficient, economically maintained network.

The process used for Risk Management is based on AS/NZS ISO 31000:2009. This standard is a generic guide to managing risk. NEL has taken the principals of the standard and applied them in its risk management process as it applies to the Nelson Electricity situation.

The system NEL uses is described in this section. NEL can demonstrate that its processes achieve the objectives of the standard by:

- A confident and rigorous basis for decision making and planning;
- Better identification of opportunities and threats;
- Gaining value from uncertainty and variability;
- Proactive rather than reactive management;
- More effective allocation of resources;
- Improved incident management and reduction in loss and the cost of risk;
- Improved stakeholder confidence and trust;
- Improved compliance with relevant legislation;
- Better corporate governance.

The main components of Risk Management for managing NEL are:

- Risk Modelling;
- Asset Performance Standards;
- Asset Condition Auditing.

8.2 Risk Modelling

NEL uses a Risk Modelling process to determine an asset's current and/or future suitability on the network. The Risk Modelling uses a probabilistic approach in which it uses a series of subjective and objective measures, as outlined in 7.3 and 7.4, to assess the likely condition of an asset. This has proven to be a good asset management tool in planning network changes and configurations. There is also, however, a need to include a deterministic approach as assets need to also comply with the Security of Supply Standards. If an asset doesn't meet the standard then even though it may be in good operating order, something needs to be done to make it comply.

The risk model NEL utilises was developed in-house to measure asset performance against a Performance Standard which has been formulated for each asset type. The Performance Standard has been calculated based on what is considered to be an acceptable Impact and Probability risk using criteria as described in 7.3 and 7.4. By analysing the Impact and Probability of the failure of an asset on the network, a Risk Number for that asset is calculated. The Risk Number is then compared to the Performance Standard and if it is found to be higher than the Standard then appropriate action will be taken to reduce the risk. If the Risk Number is lower than the Performance Standard then it is deemed to meet the requirements of Nelson Electricity's risk. Risk modelling is also used as an indicator as to whether any work or what type of work is to be undertaken on an asset. It also helps prioritise work.

Although Risk Modelling looks like a black and white process whereby an asset meets or fails a standard, in practise this is not quite the case. It should be noted that a Risk Model is used as a tool to help assess the condition of an asset and, although it is a good indicator, it should only be used in conjunction with good industry practise as sometimes it is possible that criteria weightings may cause slight anomalies when comparing the risk associated with each individual asset.

The charts below illustrate the Performance Standards applied to each category of an asset, based on the main headings of Impact and Probability and respective sub headings listed below.

Risk Standard For Individual 400 Volt Networks			
Restoration Time Hrs		No more than 1 - 3 hours	
No consumers affected		No more than 50 customers	
Customer Load		%of NEL's total load	
Other Party Interaction		3 (1-Excellent to 7-Bad)	
Environmental Impact		Insignificant	
Costs Due To Failure		No more than \$3000	
Fault Cause		No worse than unpredictable cause by others	
Safety		Insignificant	
Average Annual Fault Assumption		1 fault in 15 - 50 Years	
ODV Life Expectancy		No less than 5 - 10 Years	
Loading % > Full Load		No greater than full load	
Environment		No worse than moderate exposure	
Deterioration Audits		That reflect a life expectancy of at least 5 - 10 Years	
A 400V network is defined as everything beyond the 400V transformer storks.			

Risk Standard For Transformers			
Restoration Time Hrs		No more than 3 - 5 hours	
No consumers affected		No more than 100 customers	
Customer Load		% of NEL's Total Load	
Other Party Interaction		4 (1-Excellent to 7-Bad)	
Environmental Impact		insignificant	
Costs Due To Failure		No more than \$20,000	
Fault Cause		No worse thanUnpredictable cause by others	
Safety		Insignificant	
Average Annual Fault Assumption		1 fault in 15 - 50Years	
ODV Life Expectancy		5 - 10 Years	
Loading % > Full Load		No greater than full load	
Environment		No worse than minor exposure	
Deterioration Audits		That reflect a life expectancy of at least 5 - 10 Years	
This Standard applies to transformers only			

Risk Standard 11KV Networks			
Restoration Time Hrs		No more than 3 hours	
No consumers affected		No more than 800 customers	
Customer Load		% of NEL's Total Load	
Other Party Interaction		5 (1-Excellent to 7-Bad)	
Environmental Impact		insignificant	
Costs Due To Failure		No more than \$20,000	
Fault Cause		Unpredictable cause by others	
Safety		Insignificant	
Average Annual Fault Assumption		1 fault in 15 - 50 Years	
ODV Life Expectancy		10 - 15 Years	
Loading % > Full Load		No greater than full load	
Environment		No worse than minor exposure	
Deterioration Audits		That reflect a life expectancy of at least 10 - 15 Years	
This Standard applies to 11KV Networks Only			

Risk Standard 33 / 11KV Transformers			
Restoration Time Hrs		No more than 1 hour	
No consumers affected		No more than half of NEL customer base (4250)	
Customer Load		No more than 50% of NEL's Total Load	
Other Party Interaction		6 (1-Excellent to 7-Bad)	
Environmental Impact		insignificant	
Costs Due To Failure		>\$50,000	
Fault Cause		Unpredictable cause by others	
Safety		Insignificant	
Average Annual Fault Assumption		1 fault in 15 - 50Years	
ODV Life Expectancy		10 - 15 Years	
Loading % > Full Load		No greater than full load	
Environment		No worse than minor exposure	
Deterioration Audits		That reflect a life expectancy of at least 10 - 15 Years	
This Standard applies to 33KV Transformers Only			

Risk Standard 33KV Networks	
Restoration Time Hrs	Less than 1hour
No consumers affected	No more than half of NEL customer base (4250)
Customer Load	No more than 50% of NEL's Total Load
Other Party Interaction	6 (1-Excellent to 7-Bad)
Environmental Impact	insignificant
Costs Due To Failure	No more than \$20,000
Fault Cause	No worse than unpredictable cause by others
Safety	Insignificant
Average Annual Fault Assumption	1 fault in 15 - 50 Years
ODV Life Expectancy	5 - 10 Years
Loading % > Full Load	No greater than full load
Environment	No worse than minor exposure
Deterioration Audits	That reflect a life expectancy of at least 15 Years
This Standard applies to 33KV Networks Only	

Risk Standard For Disaster Recovery	
Restoration Time Hrs	15 - 24 Hours
No consumers affected	No more than 3/4 of NEL customer base (6375)
Customer Load	No more than 75% of NEL's Total Load
Other Party Interaction	7 (1-Excellent to 7-Bad)
Environmental Impact	Moderate
Costs Due To Failure	>50K
Fault Cause	Act of God
Safety	Minor
Average Annual Fault Assumption	1 fault in 100 Years
ODV Life Expectancy	10 - 15 Years
Loading % > Full Load	No greater than full load
Environment	No worse than minor exposure
Deterioration Audits	That reflect a life expectancy of 10 - 15 Years
This Standard applies to Disaster Recovery	

The Impact model addresses the operational side of risk and covers off reasonable restoration times if customers are without supply. The number and type of customers without supply will have an impact on this Standard as well as the expected customer response to an extended outage. Obviously the impact on environment is an important factor as are the consideration of costs both to business customers and NEL itself. Predictable and preventable causes are addressed along with the important issue of safety to contractors and especially to the public.

The Probability model deals with the likelihood of asset failure. The issues addressed here are any fault history which applies to the asset and the expected remaining service life based on the ODV model. The electrical loading the asset is required to carry and the environment the asset resides in will also impact on the probable failure of the asset. The life cycle of the asset, unlike the service life, is assessed based on actual physical audits and testing of assets rather than a theoretical model.

Overall it is believed that even though the Risk Model has been developed in-house, it comprehensively addresses the issues of good industry practice and accepted risk practices in the electrical distribution industry in New Zealand.

8.3 Impact

The consequences of an asset failure occurring.

Impact Variables Used for the Model

- ***Restoration Time***
The time taken to restore power by repair, replace or bypass.
- Number of Consumers Affected
- ***Customer Load***
Expressed as a percentage of Nelson Electricity's Maximum Demand.
- ***Public Response***
Ranges from excellent to bad.
- ***Failure Environmental Impact***
Reflects any adverse effects on the environment caused by a predictable asset fault.
- ***Cost Due to Failure***
Restoration costs caused by a predictable asset fault.
- ***Likely Fault Cause***
Ranges from unpredictable and unpreventable to predictable and preventable.
- ***Safety***
Covers any safety issue associated with the asset.

8.4 Probability

Asset issues that contribute towards the assessment of the probability of failure.

Probability Variables Used for the Model

- ***Fault History***
Derived from the fault history records for the specific asset type.
- ***Life Expectancy***
Derived from ODV remaining life of an asset.
- ***Loading***
Percentage of full working load of the asset.
- ***Environment***
Environment in which the asset is located.
- ***Life Cycle***
Information derived from Asset Condition Audits indicating the physical assessment of the remaining life of an asset.

Each element of Impact and Probability, as outlined above, is rated and appropriate weightings are allocated to establish relativity. The summation of impact is multiplied by the summation of probability to calculate an overall risk rating. This rating is then used as a guide to rank the performance of each individual asset, and is also used when comparing with Asset Performance Standards.

8.5 Asset Performance Standards

The Asset Performance Standards are set based on experience and knowledge of staff, standards and industry trends. The allocation of a number as a result of multiplying the Impact by Probability makes it easy to rank assets according to Risk. This is more comprehensive than the simple high/medium/low rankings that some companies use. It is accepted that there is a fine line at times when it comes to an asset meeting or failing the standard and so there is a need for judgement at times. There was, however, considerable investigation and analysis undertaken to ensure that the standards were set appropriately. It is important that the standards are reviewed at least annually to take into consideration latest good industry practise and new legal requirements. The model is similar in structure to that of other companies.

Outages on the network, in many cases based on actual historical events, have been modelled for five categories of assets as listed below:

- 33kV network;
- 33kV/11kV transformers;
- 11kV networks;
- 11kV/400V transformers;
- 400V networks.

NEL is a small network with relatively short lengths of cable and aerial between substations. The policy is to not deliberately overload cables or lines in times of emergency. Consequently NEL does not aim to operate the network in such a way as to compromise it and cause voltage problems during normal or emergency conditions. Under emergency conditions, the end of line voltage along with other conditions is monitored and if, during the event, the voltage drops below the industry standard, the supply is disconnected to the affected consumers.

Asset standards have been set for the network categories listed above that reflect a minimum acceptable level of performance. Assets are modelled against the asset standard, with the results being used to determine whether assets are compliant with the standard or require maintenance, upgrading or replacement. Modelling of all assets is an ongoing process.

Asset condition audits provide accurate information on each individual asset and its life cycle performance. The audit results are input to the Office Management System and the asset remodelled for its own asset performance ranking compared to the standard.

The assets not complying with the asset standard are prioritised by the risk assessment results and are programmed for repair or replacement.


Any asset that has a **safety issue** or **security issue** identified through the risk management process is automatically identified and repairs or replacement undertaken immediately.

Asset Performance Standards are also used for:

- Evaluating capital work;
- Modelling corrective action contingencies for the most appropriate solution for non-complying assets.

The flow chart on the following page outlines the risk management process.

Network Assets - Risk Management

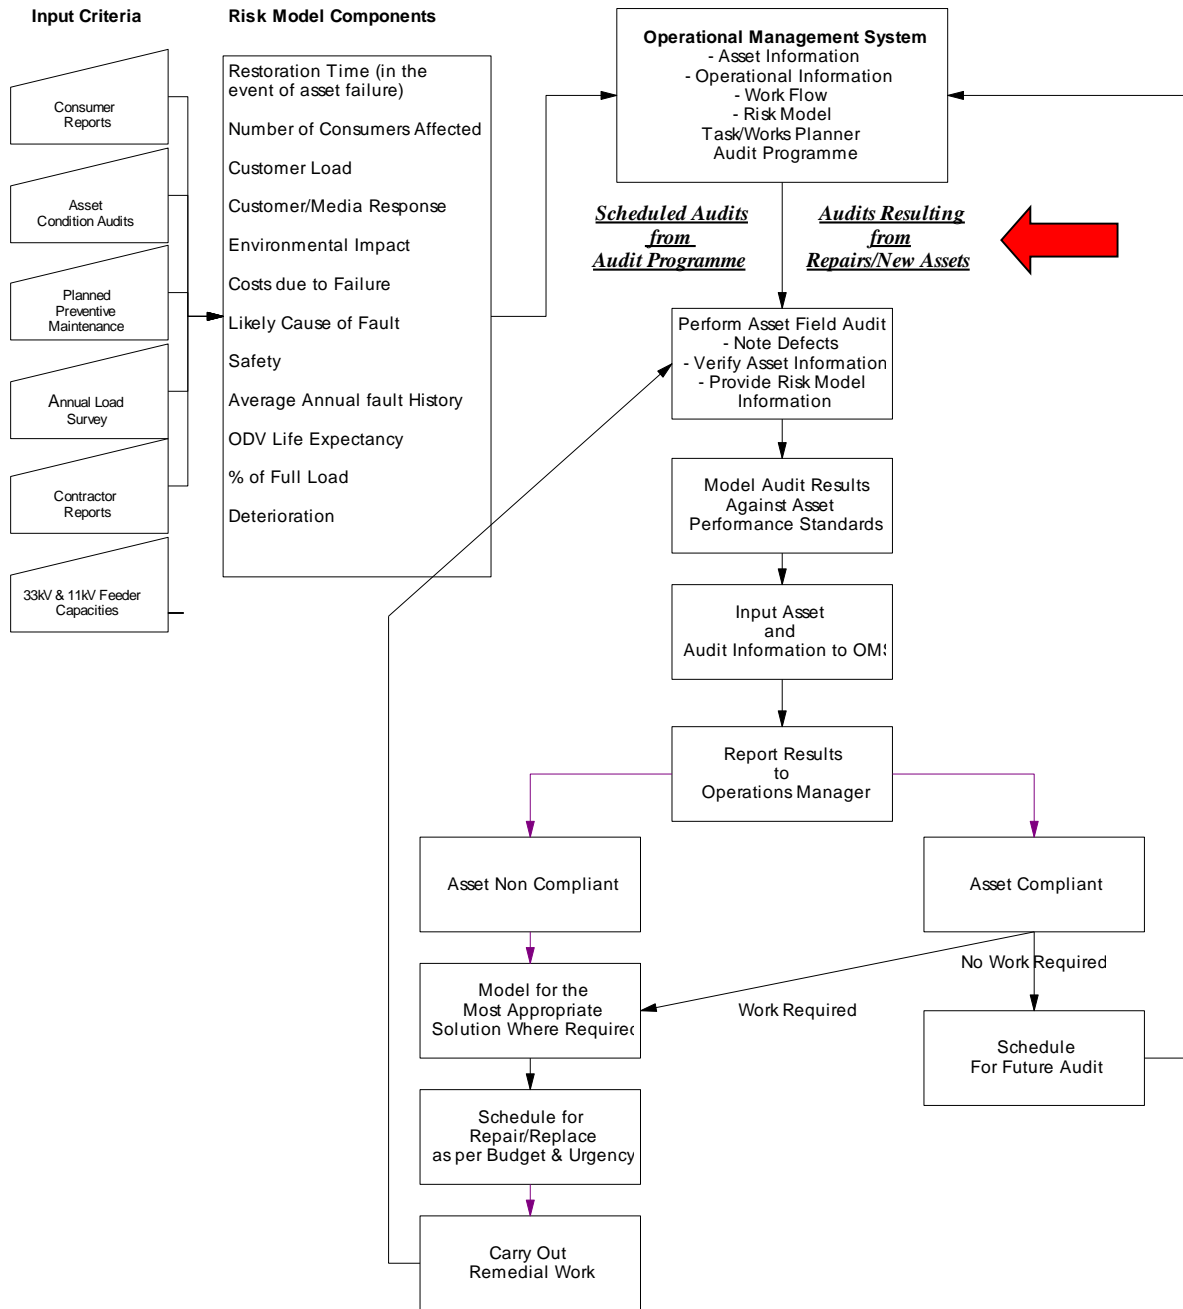

8.6 Auditing Programme

A programme has been implemented for asset condition auditing. This involves each asset being audited and specific information gathered relating to each asset. The data is risk modelled and input to the Office Management System. The content and operation of the Office Management Systems is discussed between Section 2.8 and 2.12, but in basic terms it utilises Microsoft Office software to carry out its functions. Prioritised reports generated by the System are given to the Operations Manager on a regular basis for him to analyse and schedule assets for repair or replacement. After repair or replacement the asset is again audited for its new condition and that information updated in the System.

The GIS which utilises ArcView software is discussed between Section 2.12 and 2.15, and provides a supporting role to the Office Management System as well as a key role for Faults and Operational Staff and Contractors.

An Asset Database and ICP Database also links to the GIS to provide sources of useful asset management and operational data.

As the auditing programme is undertaken on an ongoing rotational basis on above ground assets between six monthly and five yearly, the accuracy of asset information held is regarded as very accurate. The major area where completely accurate condition data is assessed more than measured is the underground cable network. Even so, partial discharge testing is carried out every two years on all 33kV feeders and key 11kV feeders (refer **Appendix A**) as well as other 11kV cables as required from time to time.

Where the age of HV cables has been assessed as a concern to future reliable service, spot checks have been made on the cables concerned by excavating down and inspecting the physical condition of the cable. The information retrieved is then recorded and filed for future reference with the asset replacement programme. If concerns still exist, a partial discharge test may be scheduled for the cable.

The information on the condition of the 400 volt network is limited. Assumptions have been made on their condition. There have been occasions where NEL has inspected cable condition when cables are exposed. It is planned that NEL will undertake more 400 volt cable testing to ensure the assumptions currently being used are still appropriate.

8.7 Risk Assessment

NEL has identified risk that can be divided into two main areas. These are Catastrophic Risk (refer **section 8.8**) and Controllable Risk (**section 8.10**).

8.8 Exposure to Natural Disasters

Catastrophic Risk

This risk typically involves the forces of nature and third party interference that can cause multiple asset failures and have serious impact on electricity supply throughout the Nelson city area. The processes for the recovery of an event of this nature are contained within the NEL Emergency Recovery Plan. That plan is reviewed annually.

The effect of the Christchurch Earthquakes has made NEL review the risks associated with any natural disaster. At the time of writing this Plan there have been some areas identified where NEL has taken these into consideration when developing this Asset Management Plan. This section will continue to be developed further as additional information is received.

Main areas being reviewed are around design standards and contingencies for safe restoration of electricity supply. Substation building strength is also a key issue being addressed.

Apart from the actual catastrophic risk, a key issue is to ensure that there are emergency communication options and the ability for staff and contractors to get to where they are needed. All staff have cellphones and handheld radios to be used in an emergency. If there is a problem in being able to get to the NEL Control Room or it is not functional, then NEL will utilise the Network Tasman Control Room.

Below are the events NEL has to consider:

- ***Earthquake*** – Nelson, by its location, is extremely susceptible to earthquake. A major fault line runs along the foot hills to the east of the city. This means that cables, lines and substations in its close vicinity as well as the whole network would be exposed during a large earthquake. The earthquakes that have occurred in Christchurch in 2010 and 2011 have further highlighted the importance of electricity supply to the community and also the slow restoration of predominantly underground networks.

NEL is continuing to review the impact of an earthquake close to the city and how it could impact on the NEL network both in asset failure as well as business continuity. Although all major assets are seismically braced, there have been some smaller assets and pieces of equipment that have been identified needing to be secured in place, eg; battery banks in some substation buildings, computers and asset spares. The work to remedy these issues has been undertaken. It is likely additional risks to the network will be identified in the coming months as a direct result of the problems and issues encountered in Christchurch.

Mitigation: Major assets are seismically braced to minimise the damage from an earthquake. Additional seismic strength assessments are being undertaken on all of NEL's substation buildings. It is expected that any issues will be factored into the Asset Management Plan and corrective work undertaken.

- ***Liquefaction*** - There is also the risk of liquefaction in the Port, Wood and Maitai River areas. Most of these areas are on reclaimed land and are identified as a risk. NEL only has 11kV and 400V assets in these areas with eight indoor 11kV/400V substations that could be affected. Most of the reticulation in these areas is underground.

Liquefaction can result in cables being stretched and pulled from their assets and, as such, there can be a lengthy period to restore electricity supply. In both the Port and Wood risk areas there are a number of backup 11kV cable options able to supply the areas. Some research work is being undertaken to see what additional measures that can be undertaken to mitigate the impact of liquefaction not only for the existing assets but for new assets installed in the areas.

Mitigation: Existing substations are built to Council standards which include minimum foundation requirements. Multiple 11kV feeders are also available into the areas. An additional study has been undertaken to identify areas of liquefaction risk to NEL. This report highlights assets more likely to suffer damage and also potentially assist NEL in the future development of the network.

- ***Tsunami*** - Being close to the sea, Nelson is also indirectly exposed to tsunami and large areas of the network, especially in the Port area, and could be inundated if a significant rise in sea level were to occur. Nelson city is protected to a degree by not only a boulder bank but also the North Island and shores of Tasman Bay due to the geographical location. The only negative is that much of the city is built close to sea level meaning the level does not have to raise much to cause damage.

The risk of a tsunami in Nelson has to be considered as a real threat. The following is a section of a release from the Nelson Tasman Emergency Management Office, 15 March 2011.

"There are three main tsunami sources for Nelson Tasman: distant earthquake sources; local earthquake sources; and other local sources (landslides, undersea slumping, volcanic activity).

Distant earthquake sources (eg; from South America or Japan) mean any tsunami generated crosses the Pacific Ocean to reach New Zealand. Realistic warning of many hours can therefore be expected for distant source tsunami.

Moreover, Tasman and Golden bays are less exposed to tsunami arriving from these directions than other parts of New Zealand. While tsunami can come into Tasman and Golden bays from these distant sources some of the wave energy is lost due to travel through Cook Strait and the nature of the geography of the bays.

Local earthquake sourced tsunami are of more concern to Tasman and Golden bays. An example would be an earthquake in the Cook Strait or an undersea slip or earthquake in the Taranaki Basin. The risk is potential for a large wave, and there is likely to be no practical warning from authorities. Such waves could move very quickly – at the speed of a jet liner.

Overall the Nelson Tasman region faces a modest tsunami risk compared to other parts of New Zealand's coastline. *Local* earthquake sources are the likely source for the largest tsunami expected in the region. Such larger tsunamis are very infrequent (ie; return period in the order of 2,500 years on average according to GNS).

Not all earthquakes result in tsunami. For example the major earthquakes of 1929 in Murchison and 1968 in Inangahua did not produce tsunami nor did the recent Christchurch earthquakes. It is when earthquakes cause displacement of the sea floor that tsunamis are generated.

There is evidence in Abel Tasman National Park and other local places of large tsunamis having occurred in the past, albeit very infrequently.”

Mitigation: The new Haven Road Zone Substation has been designed and located to minimise the impact of a tsunami. This included a raised floor for switchboards and minimum height requirement for any electrical connection.

- ***Flooding*** – Nelson is susceptible to flooding. There are areas identified by the Nelson City Council that could be inundated in the event of localised heavy rainfall. One issue for the city is that it is built close to sea level which makes it difficult for flood waters to escape to the sea at high tide.

Mitigation: Nelson City Council have, over the last 20 years, minimised the risk of flooding by improving stormwater systems, building flood dams in strategic locations and constructed the Maitai Dam. It is unlikely that Nelson Electricity would have any major consequences other than at the 400V level.

- ***Sabotage*** – NEL, being an important utility to Nelson city, is at risk of sabotage from individuals or terrorism. The likelihood of such an event causing more than minor damage is low. The two scenarios being considered are the demolition of the Zone Substation at Haven Road and 33kV feeder damage.

Mitigation: Given that Haven Road Zone Substation is critical to the supply to Nelson city, NEL will require the use of the 11kV interconnects to get limited supply from Network Tasman, if possible, until supply (temporary or permanent) is restored. The Zone Substation is monitored by First Security, security cameras and by security alarms monitored by Nelson Alarms.

In the end catastrophic risk events have to be managed as they cannot be totally eliminated.

Climate Change

With Nelson city being located close to sea level the effect of global warming and rising sea levels could in years to come have a huge impact on the network. NEL will be working with the Nelson City Council to make a risk assessment of the potential impacts.

8.9 Exposure to Natural Disasters

Transpower Grid Exit Point - Stoke

NEL takes its 33kV supply via one 33kV feeder from Transpower's Grid Exit Point and three feeders from Network Tasman's Grid Exit Point at Transpower's Stoke Substation. Although Transpower have an extensive seismic protection programme, NEL cannot comment on the likely effect of an earthquake on Transpower's transmission system and Substation at Stoke. There are some national transmission supply issues that could impact on the Nelson, Marlborough and West Coast areas in the future. Transpower have been progressing through upgrade steps to ensure these areas have an adequate transmission system.

Steps completed:

- Installed capacitors at Stoke Substation in 2005;
- Installed a third 220kV line from Islington to Kikiwa in 2006;
- Installed a second 110kV line from Stoke to Blenheim in 2006.
- Installed additional transformer capacity
- Replaced outdoor 33kV switchyard with indoor switchgear

NEL has been concerned with the transmission supply to the top of the south and has worked in with other lines companies to ensure concerns are addressed in a timely manner.

Suffice to say, there is, a continued risk to the 220kV supply from Islington to Kikiwa that crosses a significant fault line. There is the potential for a significant outage as a result of the 220kV lines being damaged in a severe earthquake. This would affect the top of the South Island including Buller. The only major generation available to the area would be via Cobb Dam which is a 30MW hydro station. In any transmission failure event NEL would work closely with Network Tasman to manage the outage and restoration.

33kV Feeder Supply

NEL is supplied by four 33kV feeders. Three feeders are aerial lines from the Grid Exit Point at Stoke to the Nelson Electricity boundary where they covert to underground cables and one is by cable directly from Stoke substation. Two of the feeders form a double circuit line and all lines are located near fault lines and so susceptible to damage in an earthquake. Earth movement from slippage or erosion is the only other natural danger to the lines. The severe weather encountered in December 2011 demonstrated this with a slip causing a tree to slide down a hill and ultimately fall onto one of the 33kV overhead lines.

Haven Road Zone Substation Building

The new Haven Road Substation building was built in 2013/14 and meets the earthquake provisions of the new standard AS/NZS 1170.

Haven Road Zone Substation 11kV Switchboard

The 11kV switchboard is a three bus sectionalised indoor type. It is not anticipated that any significant damage would occur to the switchgear during an earthquake unless there was damage to the Zone Substation building. However, if there was damage which made any switches inoperable, it is likely that some form of bypass would need to be installed.

Haven Road Zone Substation 33kV/11kV Switchyard

The Zone Substation electrical equipment is fully enclosed in the new building. It is not anticipated that any significant damage would occur to the switchgear during an earthquake unless there was damage to the Zone Substation building .

11kV/400V Substations

The 11kV/400V substations consist of a variety of kiosks, underground vaults and padmount structures as well as pole mounted types. It is expected that the ground mounted structures will withstand an earthquake but may be more susceptible to flooding and those near the tidal areas to tsunami and liquefaction. The few remaining pole mounted substations would be susceptible to earthquake.

Mitigation: The transformers in ground mounted substations have been bolted down and those below ground could be sealed against water intrusion. The pole mounted substations are being systemically installed on the ground. All substation buildings have been seismically checked and brought up to appropriate building standard.

Underground Cabling

The underground network is expected to remain intact unless there is significant ground movement in an earthquake or soil erosion in a flood or tsunami. In some areas of reclamation, liquefaction may be an issue.

Given the high proportion of the network being underground it is difficult to alter the risk profile so it becomes more of a managing of the risk. The most appropriate method is by providing alternative backup supply options.

Mitigation: Ensure that as many areas of the network as possible have an alternative route of supply by ring-feeding.

Communications/Control

It is anticipated that cellphones, which are held and operated daily by all staff, should be operational following a disaster but, as a backup, radio telephones operating via simplex would be utilised. The Zone Substation Control Room computer would enable limited computer systems to be utilised for operational purposes. It is anticipated that most operations would be controlled by the Civil Defence/Lifelines Control Centre where an NEL liaison officer would be stationed. Communications would be via cellphone or radio telephone.

Mitigation: An on-site backup generator is able to provide an electrical supply to the Control Room and essential services for operational purposes.

8.10 Exposure to Physical Risk

Controllable Risk

This is risk that is within the control of the asset owner and can be controlled by adding or removing particular assets to meet the risk standard required. The Asset Management Plan revolves primarily around this risk. NEL plans ahead and makes assessments as to when an asset needs to be replaced, upgraded or removed.

33kV Feeder Supply

Following the major 33kV feeder project NEL is now supplied by one underground and three overhead 33kV feeders. Two of the three overhead feeders are on a double circuit line at a road edge of an increasingly busy road in the Ridgeway (Stoke [Network Tasman] suburb) area. There have been two incidents in past years where cars have hit poles supporting the double circuit. In both incidents there was no damage to the line or loss of supply.

An assessment has been undertaken to forecast traffic volumes with the risk of Nelson Electricity losing supply from the double circuit leaving two 33kV feeders to supply the network with reliance of other contingencies to restore supply to the network.

Haven Road Zone Substation and 33kV/11kV Switchyard

The Zone Substation building is protected by fire and intruder alarms. The new building has been significantly hardened against intruders and sabotage from the previous outdoor substation.

11kV/400V Substations

The 11kV/400V substations consist of a variety of kiosks, underground vaults and padmount structures as well as pole mounted types. It is expected that the ground mounted structures will withstand an earthquake but are more susceptible to flooding and those near the Port to tsunami. The few remaining pole mounted substations would be susceptible to earthquake.

Mitigation: The transformers in ground mounted substations have been bolted down and those below ground could be sealed against water intrusion. The pole mounted substations are being systemically replaced on the ground.

Underground Cabling

The underground network is expected to remain intact unless there is significant ground movement in an earthquake or soil erosion in a flood or tsunami.

Mitigation: Ensure that as many areas of the network as possible have an alternative route of supply by ring-feeding.

Communications/Control

It is anticipated that cellphones, which are held and operated daily by all staff, should be operational following a disaster but, as a backup, radio telephones operating via simplex would be utilised. The Zone Substation Control Room computer would enable limited computer systems to be utilised for operational purposes. It is anticipated that most operations would be controlled by the Civil Defence Lifelines Control Centre where an NEL liaison officer would be stationed. Communications would be via cellphone or radio telephone.

Mitigation: An on-site backup generator is able to provide an electrical supply to the Control Room and essential services for operational purposes.

8.11 Emergency Plans

NEL has an Emergency Recovery Plan, which is available in electronic form or with hard copies available in-house, with individual staff, NEL control room and fault contractor. Issue is restricted to relevant Lifeline and Civil Defence groups.

The Plan includes:

- Restoration contingencies and procedures with accurate identification of risk areas in the Nelson city and on the network. An example of the type of contingency measure in place is the interconnection switches which will be used to accept supply from Network Tasman in the event of a major 33kV or 11kV feeder failure. Restoration of supply to significant customers is also addressed in the contingency measures.
- Lists detailing contractor contact details and emergency suppliers as well as lists of asset spares.
- NEL will be working closely with Network Tasman and Nelson Tasman Lifelines in the event of an emergency. NEL has identified interdependence with other Lifeline members and continues to attend Lifeline events to form working relationships with these other organisations.

Supplementary Records Information

Records information held at the main substation consist of:

- ***Hardcopy and Scanned***
Cable location plans, LV schematics, HV schematics.
- ***Computer Files***
Substation loadings, transformer sizes, cable sizes, asset locations, and AutoCad drawings. All hard copy files are scanned and stored electronically.

Because of the nature of this information it supplements rather than forms part of the Emergency Recovery Plan. All scanned data is backed up and copies kept offsite.

The Asset Performance Standards are also used to set the levels of availability of spares and resources required to recover from a disaster situation while still meeting the Standard.

Restoration contingencies and procedures are based on single event emergencies.

Document Security

In the event that the Haven Road Zone Substation was destroyed and all plans and computer information destroyed, NEL has processes in place to minimise the disruption.

Mitigation: NEL has backup copies of the following:

- Computer network file server data;
- Underground cable records;
- Field book records;
- GIS data;
- Network schematics.

Copies are stored off site and can be accessed and used in an emergency. Nelson Electricity has now completed construction of a fire-rated document storage area within the building to minimise risk of damage to network information stored in this room.

Zone Substation records, schematics and plans are drawn or have been redrawn using AutoCad. These are held on the file server and backed up daily. Older records have been captured on microfilm.

SECTION 9 - Evaluation of Performance

9.1 Evaluation of Performance

NEL network development is in line with load growth and the replacement of aged assets as detailed in this Plan and previous Plans. There are situations where some projects are brought forward and others deferred based on new information, increased growth, new developments, and finding more cost effective solutions.

Previous sections of this Plan refer to the Asset Risk Model and associated Performance Standards as the tool for measuring the reliability of asset performance. Where maintenance is required to an asset the Risk Model will assist with evaluating the most efficient and economical solution.

With continual auditing of the assets and use of the Office Management System reporting and Improvement Form, asset management and the NEL business as a whole are under continual analysis and improvement.

NEL takes into consideration comments and evaluations made in the Commerce Commission reviews into the previous Asset Management Plan. It also compares with other Electricity Distribution Business performances to assess best practise. The Asset Management Plan, when complete, is then peer reviewed by Network Tasman (as part of the engineering support agreement) and additional changes made to further improve the quality and compliance level of the document. This review is undertaken prior to director endorsement and disclosure.

9.2 Review of Progress and Gap Analysis

Financial Performance

Nelson Electricity has introduced the financial targets below and will report actual versus target.

Operational Expenditure	Industry Average 2015	2013	2014	2015	2016 Estimate	2017 Forecast	2018 Forecast	2019 Forecast	2020 Forecast	2021 Forecast
Network	\$106	\$72	\$95	\$58	\$60	\$75	\$77	\$78	\$80	\$81
Non Network	\$148	\$183	\$148	\$149	\$148	\$153	\$156	\$159	\$162	\$166
Capital Expenditure	Industry Average 2015	2013	2014	2015	2016 Estimate	2017 Forecast	2018 Forecast	2019 Forecast	2020 Forecast	2021 Forecast
Network	\$368	\$538	\$1,362	\$137	\$71	\$103	\$99	\$112	\$106	\$176
Non Network	\$25	\$7	\$8	\$1	\$5	\$10	\$10	\$11	\$11	\$11

Operational Non Network costs per ICP overall are in line with target for 2016. NEL will be aiming to keep operational costs per ICP at only increasing by 1% per year (allowing for CPI adjustments) over the planning period. This will reflect the improved efficiency of the management of the network and offsetting the increasing compliance costs associated with being a regulated business.

Operational Network costs have reduced compared to previous year and below target of \$83 per ICP by \$22. The main reasons for this are:

- Unplanned expenses are 25% lower than forecast due to lower than expected number of network faults.
- Works resulting from asset condition audits are lower in numbers for the year.

It is expected that operational network costs will fall back into line with business as usual expenditure levels of four years ago prior to the overhead line compliance work and vulnerable cables which saw expenditure exceed forecast as can be seen in the 20013 and 2014 years.

Reliability and Performance

NEL has been actively recording 33kV and 11kV outage statistics since 1994/95 and the annual figures reflect significant improvement from those of the early years. The main improvement has come in the area of the 33kV feeders where problems with cable/joint failures and contractor strikes in the 1990s have been reduced with the implementation of policy and regular contact with excavation contractors.

Network reliability has improved significantly over the last 4 years as a result of the major investment in a new zone substation and fourth 33kV feeder.

- The 2014 year was above target due to the planned change over from the old to new Zone Substation affecting all NEL customers at some point during the project.

Very few planned outages have been undertaken in the 2015/16 year as a result of the review and reprioritising of the Capital Plan. While remaining within target the SAIDI statistics are expected to rise over the next few years as the reprioritised capital plan is undertaken. Every attempt is made to minimise outage areas and durations but the work is necessary.

SAIDI

	Year End	Transpower Planned	Transpower Unplanned	Transpower Total	NEL Planned	NEL Unplanned	NEL Total	Overall SAIDI
Actual	2003	0.00	0.00	0.00	27.00	72.00	99.00	99.00
Actual	2004	0.00	0.00	0.00	7.00	46.00	53.00	53.00
Actual	2005	0.00	0.00	0.00	12.00	39.00	51.00	51.00
Actual	2006	0.00	101.00	101.00	12.00	10.00	22.00	123.00
Actual	2007	0.00	215.00	215.00	9.00	16.00	25.00	240.00
Actual	2008	0.00	0.00	0.00	5.00	12.00	17.00	17.00
Actual	2009	0.00	70.00	70.00	29.00	87.00	116.00	186.00
Actual	2010	0.00	90.00	90.00	54.00	25.00	79.00	169.00
Actual	2011	0.00	0.00	0.00	9.00	106.00	115.00	115.00
Actual	2012	0.00	0.00	0.00	9.00	54.00	63.00	63.00
Actual	2013	0.00	0.00	0.00	10.24	34.00	44.24	44.24
Actual	2014	0.00	39.59	39.59	1.77	20.61	22.38	61.97
Actual	2015	0.00	0.00	0.00	2.55	17.39	19.94	19.94
FORECAST	2016	0.00	0.00	0.00	0.57	10.37	10.94	10.94
Future Target	2017	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2018	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2019	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Future Target	2020	0.00	0.00	0.00	15.00	30.00	45.00	45.00
Industry 2015 Average								153.00


NEL will continue to work with contractors to ensure that appropriate care is taken around network assets.

It has to be noted that NEL is a small network and that any outage has a huge impact on outage statistics. There will always be annual differences and extremes. This was demonstrated in the 2012 results showing a total SAIDI of 63 minutes. One outage accounted for 55 minutes and one outage in 2013 which contributed 23 minutes of the total 34 minutes of unplanned SAIDI.

All unplanned outages will continue to be investigated and corrective procedures and actions put in place to reduce or eliminate the risk of a similar outage and reduce the impact if a similar outage does occur. Tables of all outage statistics are included in the Service Level section.

Number of Faults per 100 Kilometres of Network

The number of faults per 100 kilometres of line was on target for 2016 and significantly below the industry average of 9.2 faults per 100km of line.

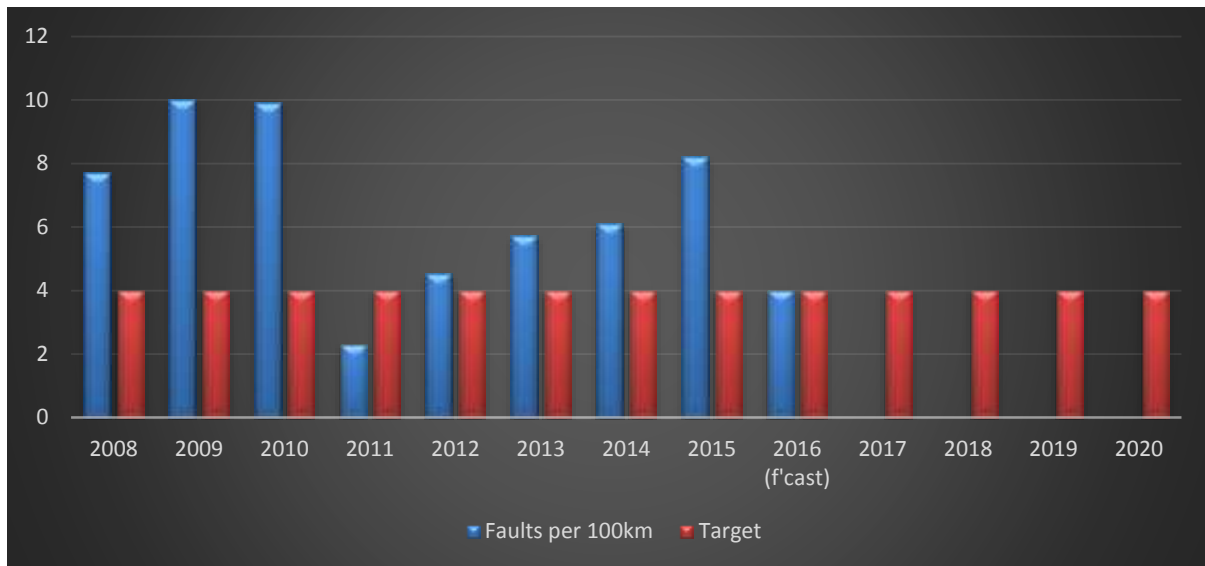

NEL is a small network and any fault has a severe impact on this. In previous years the performance levels have been affected by contractors digging up cables. An added awareness campaign on usage of cable locations and safety observers looks to have reduced the number of these types of cable faults.

The target of four faults per 100 kilometres of line is a target based on the theoretical best performance of an underground type network. It has to be noted that many faults that occur are not network related but more third party or contractor related. NEL has attempted to minimise this and will continue to educate contractors and public on electricity network risks.

Fluctuating Voltage

There were three voltage complaints received for the year. One was proven to be network related. All issues were resolved in a timely manner. The network standard was for no more than seven proven network voltage complaints received per year. Given the elevated number of complaints received during the 2009 year, NEL has been monitoring this issue closely to ensure this was not more than a statistical abnormality. The voltage complaints received and confirmed since 2009 confirm there is not a degradation of voltage on the network.

Capacity Utilisation and Load Factor

The Capacity Utilisation and Load Factors have been reducing in recent years predominantly due to the flattening of peak demand and declining kilowatt hour consumption. The changes in peak demand and consumption may see some transformer downgrades but this will most likely be through consumers with dedicated transformers requesting downsizing. It is expected that these rates will begin to recover to target levels over a length of time.

Harmonics and Interference

There have been no reported issues with harmonics in recent years.

Environmental Performance

The environmental performance for the year was satisfactory. There were no environmental incidents on the network during the year. The oil spill kits are maintained at appropriate locations and available when lifting oil filled equipment on and off trucks.

Safety Performance

There were no loss time injuries by staff or contractors working on the network. Any public safety issues with distribution assets were dealt with within the 30 minute response time.

There were no public safety or property damage events during the year.

Records

NEL is in the process of implementing a GIS and this project, although ongoing, is still under development. NEL holds a set of hard copy underground record plans of which staff and contractors rely heavily for day to day operations of the network. These records have been found to be devoid of cable sizes and depths of lay in some areas but these issues are being addressed with ongoing audits. The plans are supported by field book as-built records of the most recent network extensions. With the development of the GIS and an associated database, the physical and operational records of all assets will be linked under a single Asset Management system.

Gap Analysis Process

Gap Analysis comprises:


- Identification of the gap;
- Analysis of problems and solutions;
- Corrective/preventive actions.

The Office Management System provides the ideal tools for identifying, analysing and correcting problems within the business. All works and business tasks are programmed on a Planner, which is issued to each staff member in the last days of the month, for the following month, with copies of each to the General Manager. During the weekly staff meetings the General Manager requests updates on all tasks. Any non-conformances are recorded on the Improvement Form and discussed between the staff member and General Manager.

Contractors' works are delivered by way of the Work Permit. When the work/task is completed it may be audited, then the Work Permit is signed off. Reports are produced for management to analyse all works/tasks completed and those not completed. Likewise Improvement Form reporting is also analysed. Possible solutions are discussed and may be risk modelled then corrective/preventive measures put in place. Refer flow chart below.

System reliability targets and statistics will also be analysed regularly as programmed on the Planner. The Planner will also programme reviews of the Office Management System, Asset Management Plan and Business Plan progress. The reviews and continuous improvement strategies will be discussed at the weekly staff meetings.

NEL Staff and Contractor Work/Task Flow

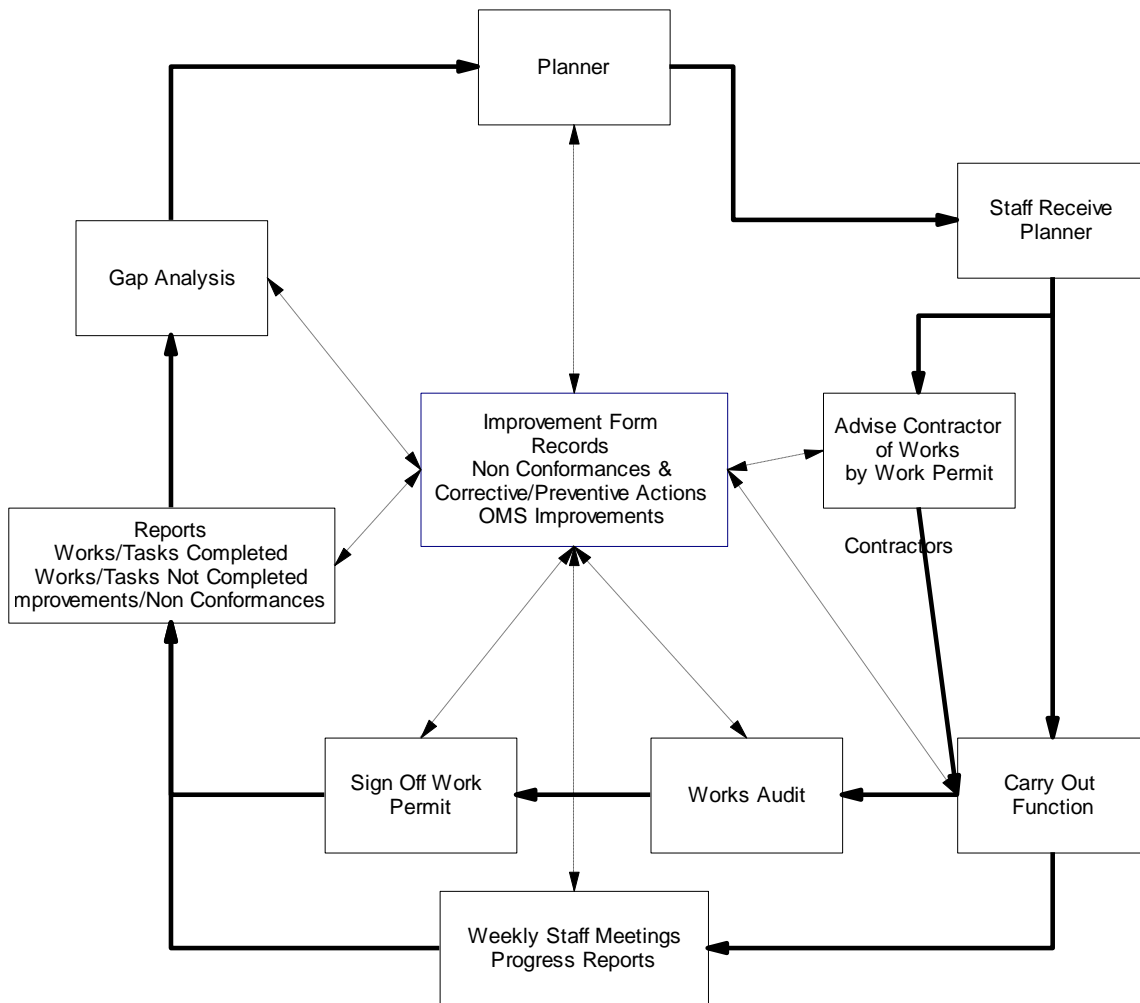

Asset Management and Planning

On an annual basis, NEL reviews its asset management processes by various means to ensure it is appropriate for the network. There are three fundamental processes undertaken to ensure that the processes used are appropriate and in line with good industry practise.

- NEL has the Asset Management Plan peer-reviewed by Network Tasman engineering staff. This process identifies, on occasion, new initiatives that may have been missed. It also ensures that the asset management processes are confirmed as appropriate.
- NEL critically reviews any Asset Management Plan reviews commissioned by the Commerce Commission. This review always highlights new areas for improvement and also helps target resources when reviewing the asset management processes.
- Monitor other network company asset management plans.

The Asset Management Plan has now been reformatted to align with the Electricity Information Disclosure Handbook. This has the benefit of the plan being easier to review by the Commission as well as simplifying the document which has become quite large with some fragmented information.

Asset Management Maturity Assessment

NEL has undertaken an asset management maturity assessment as required under the Electricity Distribution Information Disclosure Determination 2012. The accompanying Schedule 13 from the Determination is included at the back of this Asset Management Plan. The Schedule has been compiled and assessed by utilising an Independent Qualified Electrical Engineer. This provides a level of independence in the assessment.

While the 2013 assessment undertaken shows NEL has a reasonable level of maturity, there remains some areas identified which will be focussed on during the 2016 year.

Areas Identified for Improvement from the Asset Management Maturity Assessment

Q.62 and Q.64 Information Management

NEL has a GIS system and information systems which support asset management. The asset management systems are regularly reviewed to ensure the inputs, checks and outputs are appropriate and it provides the flexibility for changes of asset standards, new technologies and regulatory requirements.

Q.79 Use and Maintenance of Risk Information

NEL reviews regularly the utilisation of risk information as well as the assessment of appropriate resourcing to match the changing requirements over time.

Q.82 Legal and Other Requirements

NEL utilises a number of methods to ensure it is aware of its legal, regulatory, statutory and other asset management requirements. While this has been workable, procedures and processes need to be incorporated into the Asset Management Plan.

SECTION 10 - Expenditure Forecasts and Reconciliations

As a review of progress against the portions of the Asset Management Plan Update 2014–2024 and the Asset Management Plan Update 2015–2025, the following is the Asset Management Plan Requirement for expenditure forecasts and reconciliations.

10.1 Capital Expenditure

2014/15 Asset Management Plan- Original Budget versus Actual

Capital Expenditure	Actual 31 Mar 2015	Budget 31 Mar 2015	Variance % 31 Mar 2015
Network Capex			
Consumer connection	\$1,000		
System growth	\$783,000	\$235,000	333%
Asset replacement and renewal	\$458,000	\$520,000	88%
Asset relocations	\$7,000		
Reliability, safety and environment:	\$10,000	\$130,000	8%
	\$1,259,000	\$885,000	142%
Non-Network Capex	\$6,000	\$0	
	\$6,000	\$0	
Total Capital Expenditure	\$1,265,000	\$885,000	143%

The Board approved, in principal, the Capital Expenditure budget at the beginning of the financial year. Individual capital projects, subject to delegations of authority, require further approval by the Board. The Capital Expenditure for the 2014/15 year was above the Asset Management Plan estimate. Original estimates were \$885,000 when the end of year actual was \$1,265,000. This over-spend was mainly due to the completion of the cut-over from the old outdoor Zone Substation to the new indoor Zone Substation at Haven Road being undertaken in 2014/15 when most of this work was planned to be completed in the previous year. This additional expenditure of \$663,000 was offset by the deferral and removal of most growth related projects for the year due to flat demand and declining kWh consumption.

2015/16 Asset Management Plan – Original Estimate versus Forecast End of Year

Capital Expenditure	Forecast 31 Mar 2016	Budget 31 Mar 2016	Variance % 31 Mar 2016
Network Capex			
Consumer connection	\$1,000		
System growth	\$55,000	\$152,000	36%
Asset replacement and renewal	\$529,000	\$668,000	79%
Asset relocations			
Reliability, safety and environment:	\$40,000	\$30,000	133%
	\$625,000	\$849,000	74%
Non-Network Capex	\$25,000	\$20,000	125%
	\$25,000	\$20,000	125%
Total Capital Expenditure	\$650,000	\$869,000	75%

The forecast capital expenditure for 2015/16 will be \$650,000 which will be under the disclosed estimate in the 2015-2025 Asset Management Plan Update of \$869,000. The year-end estimate is 25% below budget due to further growth projects and renewal projects either being deferred or removed from the plan due to continued flat demand and forecast kWh consumption reduction.

10.2 Operational Expenditure

2014/15 Asset Management Plan - Forecast versus Actual

Operational Expenditure	Actual 31 Mar 2015	Budget 31 Mar 2015	Variance % 31 Mar 2015
Network Opex			
Service interruptions and emergencies	\$131,000	\$144,000	91%
Vegetation management	\$59,000	\$30,000	197%
Routine and corrective maintenance and inspection	\$280,000	\$250,000	112%
Asset replacement and renewal	\$65,000	\$375,000	17%
	\$535,000	\$799,000	67%
Non-Network Opex			
System operations and network support	\$406,000	\$258,000	157%
Business support	\$965,000	\$1,342,000	72%
	\$1,371,000	\$1,600,000	86%
Total Operational Expenditure	\$1,906,000	\$2,399,000	79%

Network Operational Expenditure for the year ending 2015 was \$535,000 which was \$264,000 under the budget of \$799,000. The significant variance was with asset replacement and renewal where only 17% of the budget was spent. The key reason for this was significant resources went into the completion of the new Zone Substation at Haven Road committing local contracting resources. There was a need to reprioritise maintenance works as a result. All urgent and safety related works were undertaken and did not compromise network security of supply.

All planned asset auditing has been completed for the year.

Non-Network Expenditure was 14% lower for the year. This was a good result given the additional workload to complete the new Zone Substation at Haven Road and the additional resources required dealing with regulatory compliance eg; The Default Price Quality Path 2015-2020 reset.

2015/16 Asset Management Plan - Forecast versus Forecast End of Year

Operational Expenditure	Estimate 31 Mar 2016	Budget 31 Mar 2016	Variance % 31 Mar 2016
Network Opex			
Service interruptions and emergencies	\$76,000	\$147,000	52%
Vegetation management	\$30,000	\$51,000	59%
Routine and corrective maintenance and inspection	\$192,000	\$228,000	84%
Asset replacement and renewal	\$256,000	\$339,000	76%
	\$554,000	\$765,000	72%

Operational Expenditure	Estimate 31 Mar 2016	Budget 31 Mar 2016	Variance % 31 Mar 2016
Non-Network Opex			
System operations and network support	\$300,000	\$263,000	114%
Business support	\$1,100,000	\$1,081,000	102%
	\$1,400,000	\$1,344,000	104%
Total Operational Expenditure	\$1,954,000	\$2,109,000	93%

Asset Management Plan forecast for the year ending 2016 is \$554,000 which is \$211,000 below the budget of \$765,000. This 28% reduction is due to less works resulting from planned preventative maintenance and asset auditing programmes. There are less assets requiring expenditure with only 8% of assets audited through the year requiring replacement or renewal expenditure. All scheduled maintenance and urgent maintenance resulting from audits is forecast to be completed where required by end of the financial year.

Reductions in vegetation management costs demonstrates that Nelson Electricity is getting on top of the “trees in lines” problem. There has also been a reduction in unplanned maintenance with a lower number of faults throughout the year.

Maintenance Initiatives

The auditing and maintenance programme, which has been continually fine-tuned, is working effectively. The main reason for its effectiveness is due to having a robust auditing programme undertaken by extremely competent people. The work that comes from the audits are prioritised and undertaken in a timely manner. The frequency of the auditing is reviewed on an annual basis to ensure NEL is in line with at least good industry practise.

There will always be modifications to the programmes and the current changes or initiatives revolve around auditing service lines on road reserve and NEL assets on private property.


APPENDICES

Appendices A-E

Audit Programme 1 April 2016 - 31 March 2026

Category	Asset Type	Audit Type	Description	Audit Frequency ID	Total No of Assets	Comments	2016/2017	2017/2018	2018/2019	2019/2020	2020/2021	2021/2022	2022/2023	2023/2024	2024/2025	2025/2026										
33 kV Networks	OCB Switch	Partial Discharge	Zone Substation	2 Yearly	4		4	1/04/2016		4	1/04/2018		4	1/04/2020		4	1/04/2022		4	1/04/2024						
33 kV Networks	OH/UG Structure	Thermal Imaging	Boundary Rd	2 Yearly	1	DELTA	1	1/04/2016		1	1/04/2018		1	1/04/2020		1	1/04/2022		1	1/04/2024						
33 kV Networks	Pole	Visual	Concrete	2 Yearly	3	DELTA		3	1/04/2017		3	1/04/2017		3	1/04/2021		3	1/04/2023		3	1/04/2025					
33 kV Networks	Zone Substation	Planned Maintenance	Checks/Cleaning	Monthly		DELTA																				
33 kV Networks	UG Cable	Partial Discharge	St Vinc / Vang / Ruth / Waimea	2 Yearly	4		4	1/04/2016		4	1/04/2018		4	1/04/2020		4	1/04/2022		4	1/04/2024						
33 kV Networks	Earths	Test	Zone Substation	5 Yearly	1				1	1/04/2018									1	1/04/2023						
33/11 kV Transformers	Transformer	Oil Sample	T1-T2-T3	Annually	3		3	1/04/2016	3	1/04/2017		3	1/04/2019	3	1/04/2020	3	1/04/2021	3	1/04/2022	1	1/04/2023	1	1/04/2024	1	1/04/2025	
33/11 kV Transformers	Transformer	Tap Change Recordings	Plan Mce	Monthly	3																					
33/11 kV Transformers	Transformer	Temperature	Plan Mce	Monthly	3																					
11kV Networks	Earths	Test	Distribution Subs	5 Yearly	197		39	1/04/2016	39	1/04/2017	39	1/04/2018	40	1/04/2019	40	1/04/2020	39	1/04/2021	39	1/04/2022	39	1/04/2023	40	1/04/2024	40	1/04/2025
11kV Networks	Earths	Visual	Distribution Subs (Plan Mce)	6 Monthly	197																					
11kV Networks	Cables (all)	Partial Discharge	Zone Substation	2 Yearly				1/04/2016			1/04/2018			1/04/2020							1/04/2024					
11kV Networks	HV Link Box	Visual	Plan Mce	6 Monthly	40																					
11kV Networks	Main Feeders	Partial Discharge	Zone Substation	2 Yearly	14		14	1/04/2016		14	1/04/2018			14	1/04/2020			14	1/04/2022			14	1/04/2024			
11kV Networks	Zone Sub OCB	Partial Discharge	11kV OCB (Zone Sub)	2 Yearly	14		14	1/04/2016		14	1/04/2018			14	1/04/2020			14	1/04/2022			14	1/04/2024			
11kV Networks	OCB Switch	Oil Sample / Earth Test / Protection Settings	HV Switches (first out subs)	2 Yearly		7 Substations	3	1/04/2016	4	1/04/2017	3	1/04/2018	4	1/04/2019	3	1/04/2020	4	1/04/2021	3	1/04/2022	4	1/04/2023	3	1/04/2024	4	1/04/2025
11kV Networks	OCB Switch	Partial Discharge	HV Switches (first out subs)	2 Yearly		7 Substations	3	1/04/2016	4	1/04/2017	3	1/04/2018	4	1/04/2019	3	1/04/2020	4	1/04/2021	3	1/04/2022	4	1/04/2023	3	1/04/2024	4	1/04/2025
11kV Networks	Pole (concrete)	Visual	includes stay poles	5 Yearly	195		39	1/04/2016	39	1/04/2017	39	1/04/2018	39	1/04/2019	39	1/04/2020	39	1/04/2021	39	1/04/2022	39	1/04/2023	39	1/04/2024	39	1/04/2025
11kV Networks	Pole (wood)	Visual/Heat Gun/UG Test	includes stay poles	3 Yearly	13		6	1/04/2016	7	1/04/2017	6	1/04/2018	7	1/04/2019	6	1/04/2020	7	1/04/2021	6	1/04/2022	7	1/04/2023	6	1/04/2024	7	1/04/2025
11kV Networks	HV Switches	Visual	Plan Mce	6 Monthly	313																					
1kV Networks	HV Switches	Oil Sample	Maintenance	5 Yearly	313		62	1/04/2016	62	1/04/2017	63	1/04/2018	63	1/04/2019	63	1/04/2020	62	1/04/2021	62	1/04/2022	63	1/04/2023	63	1/04/2024	63	1/04/2025
11kV/400V Transformers	Transformer	Oil Sample		5 Yearly	206		39	1/04/2016	39	1/04/2017	39	1/04/2018	39	1/04/2019	39	1/04/2020	39	1/04/2021	39	1/04/2022	39	1/04/2023	39	1/04/2024	39	1/04/2025
11kV/400V Transformers	Transformer	MDI Readings	Plan Mce	6 Monthly	198																					
11kV/400V Transformers	Transformer	Temperature	Plan Mce	6 Monthly	198																					
11kV/400V Transformers	Transformer	Visual	Plan Mce	6 Monthly	198																					
400V Networks	LV Link Box	Visual/Heat Gun		5 Yearly	314		62	1/04/2016	63	1/04/2017	63	1/04/2018	63	1/04/2019	63	1/04/2020	62	1/04/2021	63	1/04/2022	63	1/04/2023	63	1/04/2024	63	1/04/2025
400V Networks	Pole (wood)	Visual/Heat Gun/UG Test	includes stay poles	3 Yearly	131		26	1/04/2016	26	1/04/2017	26	1/04/2018	26	1/04/2019	27	1/04/2020	26	1/04/2021	26	1/04/2022	26	1/04/2023	26	1/04/2024	27	1/04/2025
400V Networks	Pole (concrete)	Visual	includes stay poles	5 Yearly	527		105	1/04/2016	105	1/04/2017	105	1/04/2018	106	1/04/2019	106	1/04/2020	105	1/04/2021	105	1/04/2022	105	1/04/2023	106	1/04/2024	106	1/04/2025
400V Networks	Service Box	Visual/Heat Gun		5 Yearly	2415		483	1/04/2016	483	1/04/2017	483	1/04/2018	483	1/04/2019	483	1/04/2020	483	1/04/2021	483	1/04/2022	483	1/04/2023	483	1/04/2024	483	1/04/2025
400V Networks	Link/Service Box	External Safety Audit		2 Yearly	2707		1353	1/04/2016	1354	1/04/2017	1353	1/04/2018	1354	1/04/2019	1353	1/04/2020	1354	1/04/2021	1353	1/04/2022	1354	1/04/2023	1353	1/04/2024	1354	1/04/2025
400V Networks	Sub Station	Visual	Plan Mce	6 Monthly	198																					
400V Networks	Sub Station	Hot Spots	Plan Mce	6 Monthly	198																					
400V Networks	OH Lines	Line Heights		5 Yearly	N/A	All OH Lines					1/04/2018										1/04/2023					

NELSON ELECTRICITY NETWORK AREA & 33kV CABLE ROUTES

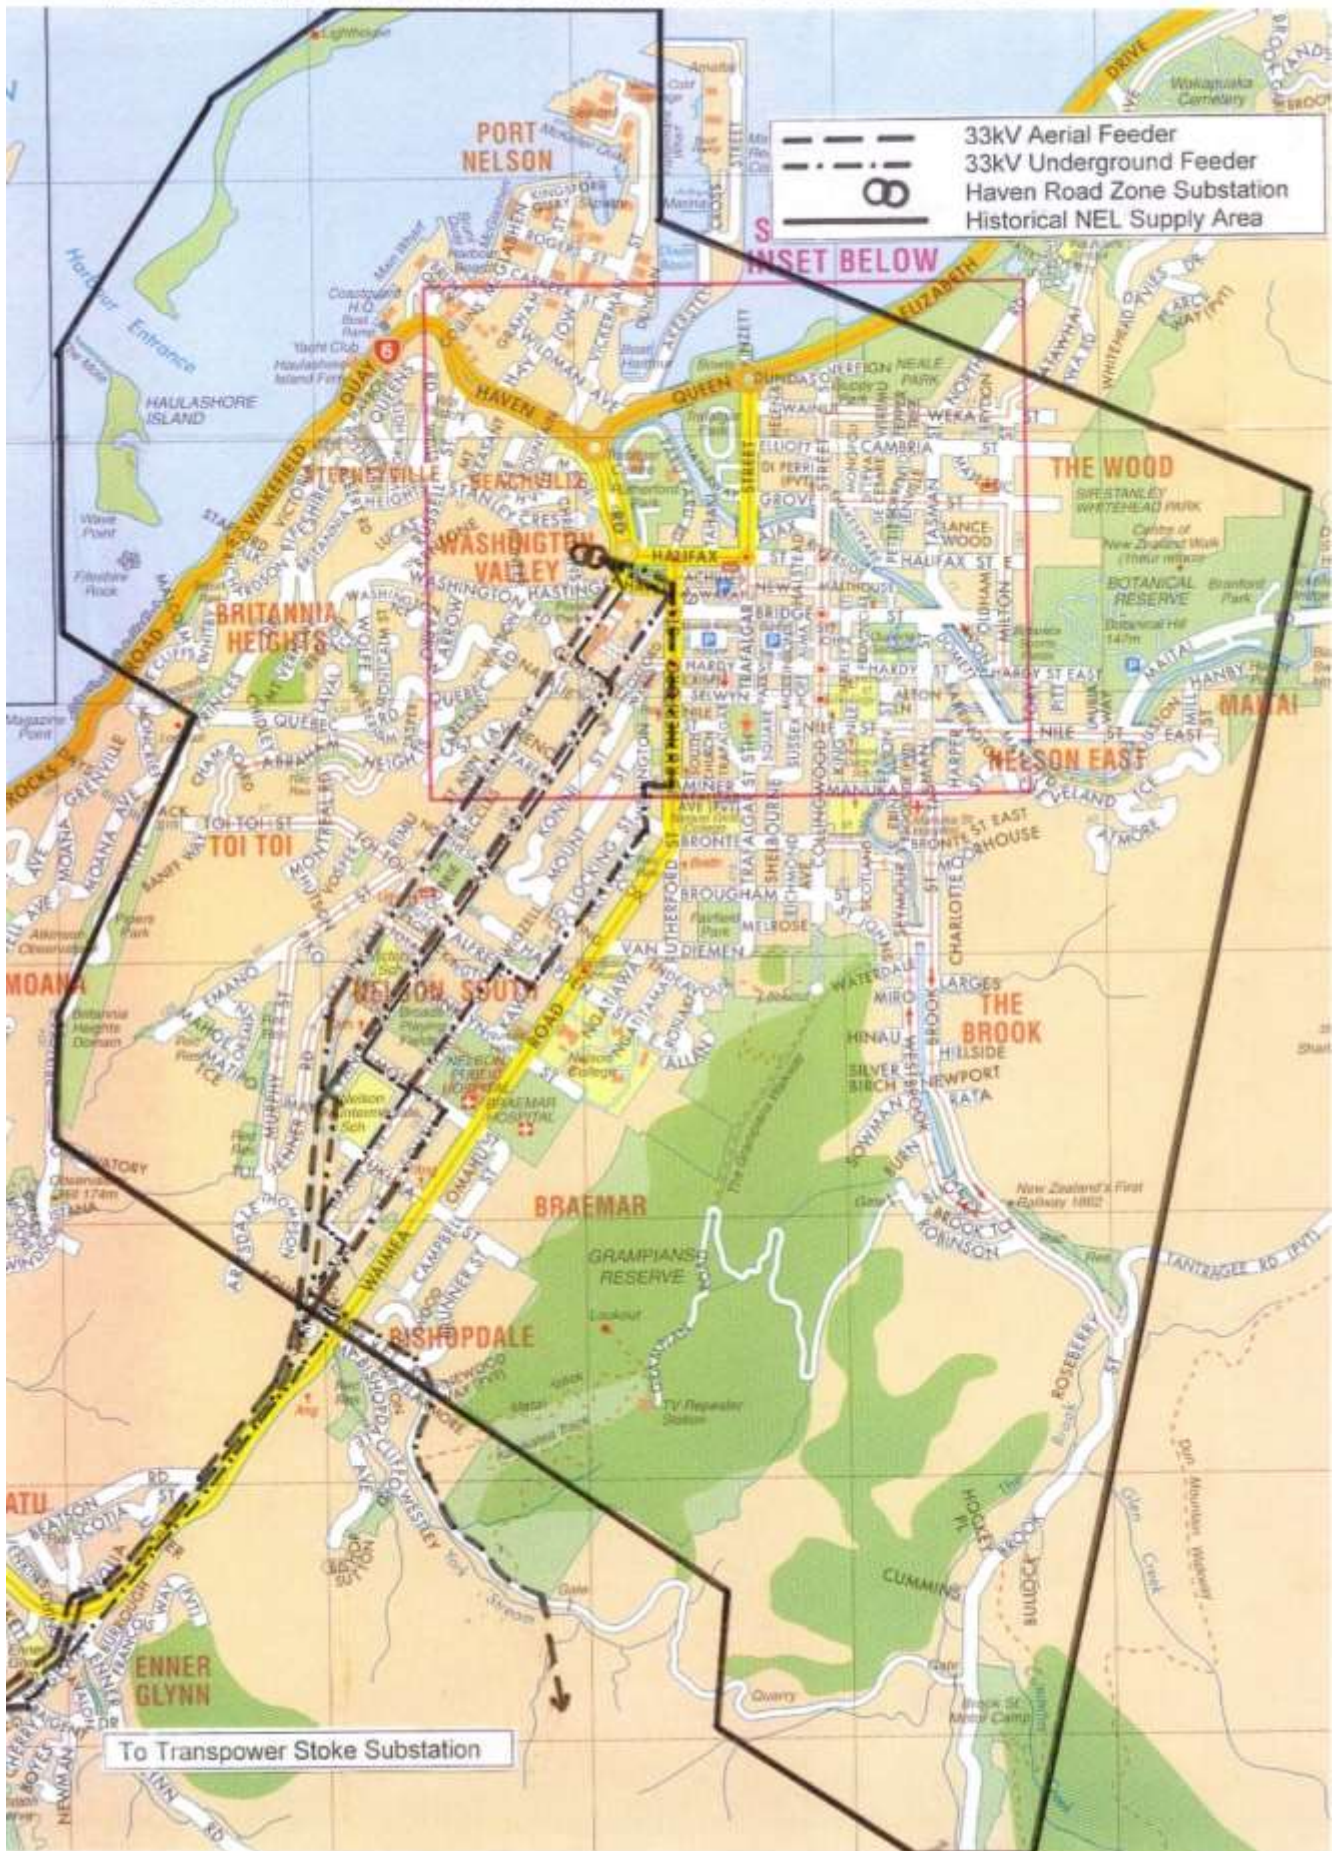


APPENDIX B continued

NEL - ELECTRICAL LV BOUNDARIES since April 2003

Location	Last Consumer
North Road (East Side)	No 38
North Road (West Side)	No 25
Atawhai Drive (East Side)	No 22
Atawhai Drive (West Side)	No 23A
Maitai Drive (North Side)	Branford Park Ablutions Block
Hanby Park (South Side)	No 26
Upper Brook Street	Brook Camp and Gibbons Quarry
Market Road (North Side)	To Pinewood Way
Waimea Road (East Side)	No 201 - Bowling Club
Waimea Road (West Side)	No 204
Boundary Road	All North Side
Kawai Street (West Side)	No 248
Princes Drive (East Side)	No 187C
Princes Drive (West Side)	No 128
The Cliffs (East Side)	No 35 and then from No 56
The Cliffs (West Side)	No 22 and then from No 53
Rocks Road (East Side)	No 455
Rocks Road (West Side)	No 350
Haulashore Island and Boulder Bank to Lighthouse	Port Area
Akersten Street	To Dixon Basin

APPENDIX C

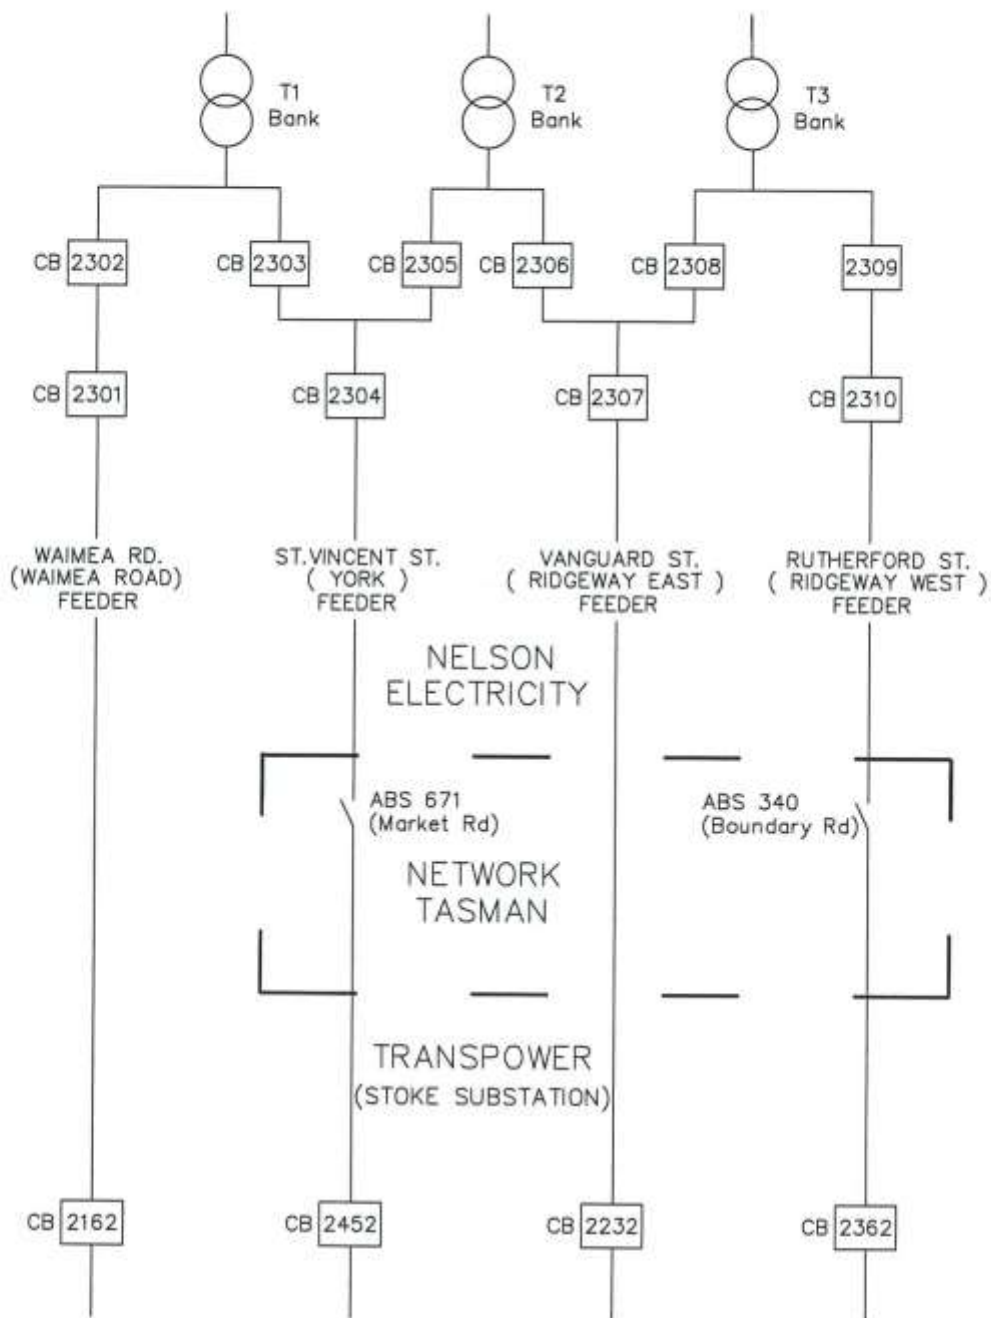

Title: DETAILS OF 33KV FEEDERS BETWEEN TRANSPOWER (STOKE SUB) & NELSON ELECTRICITY LTD SUB




63 Haven Road,
PO Box 7083, Nelson, New Zealand.
Phone (03) 546-9256, Fax (03) 546-0487

Issue	A	B	C	D	E	F	G	H	I	J	K		
Date	13.06.2014						JOB. No.			sheet			
Scale	N.T.S.									1			
Drawn	D.W.R.						DRAWING No.			of			
Designed							1339			1			
Checked							COMP. REF:						
Approved							NZED-NCC						

APPENDIX D

SECTION	DATE	REVISION	BY	DESCRIPTION	DATE	BY
101	2011	1
102
103
104
105
106
107
108
109
110

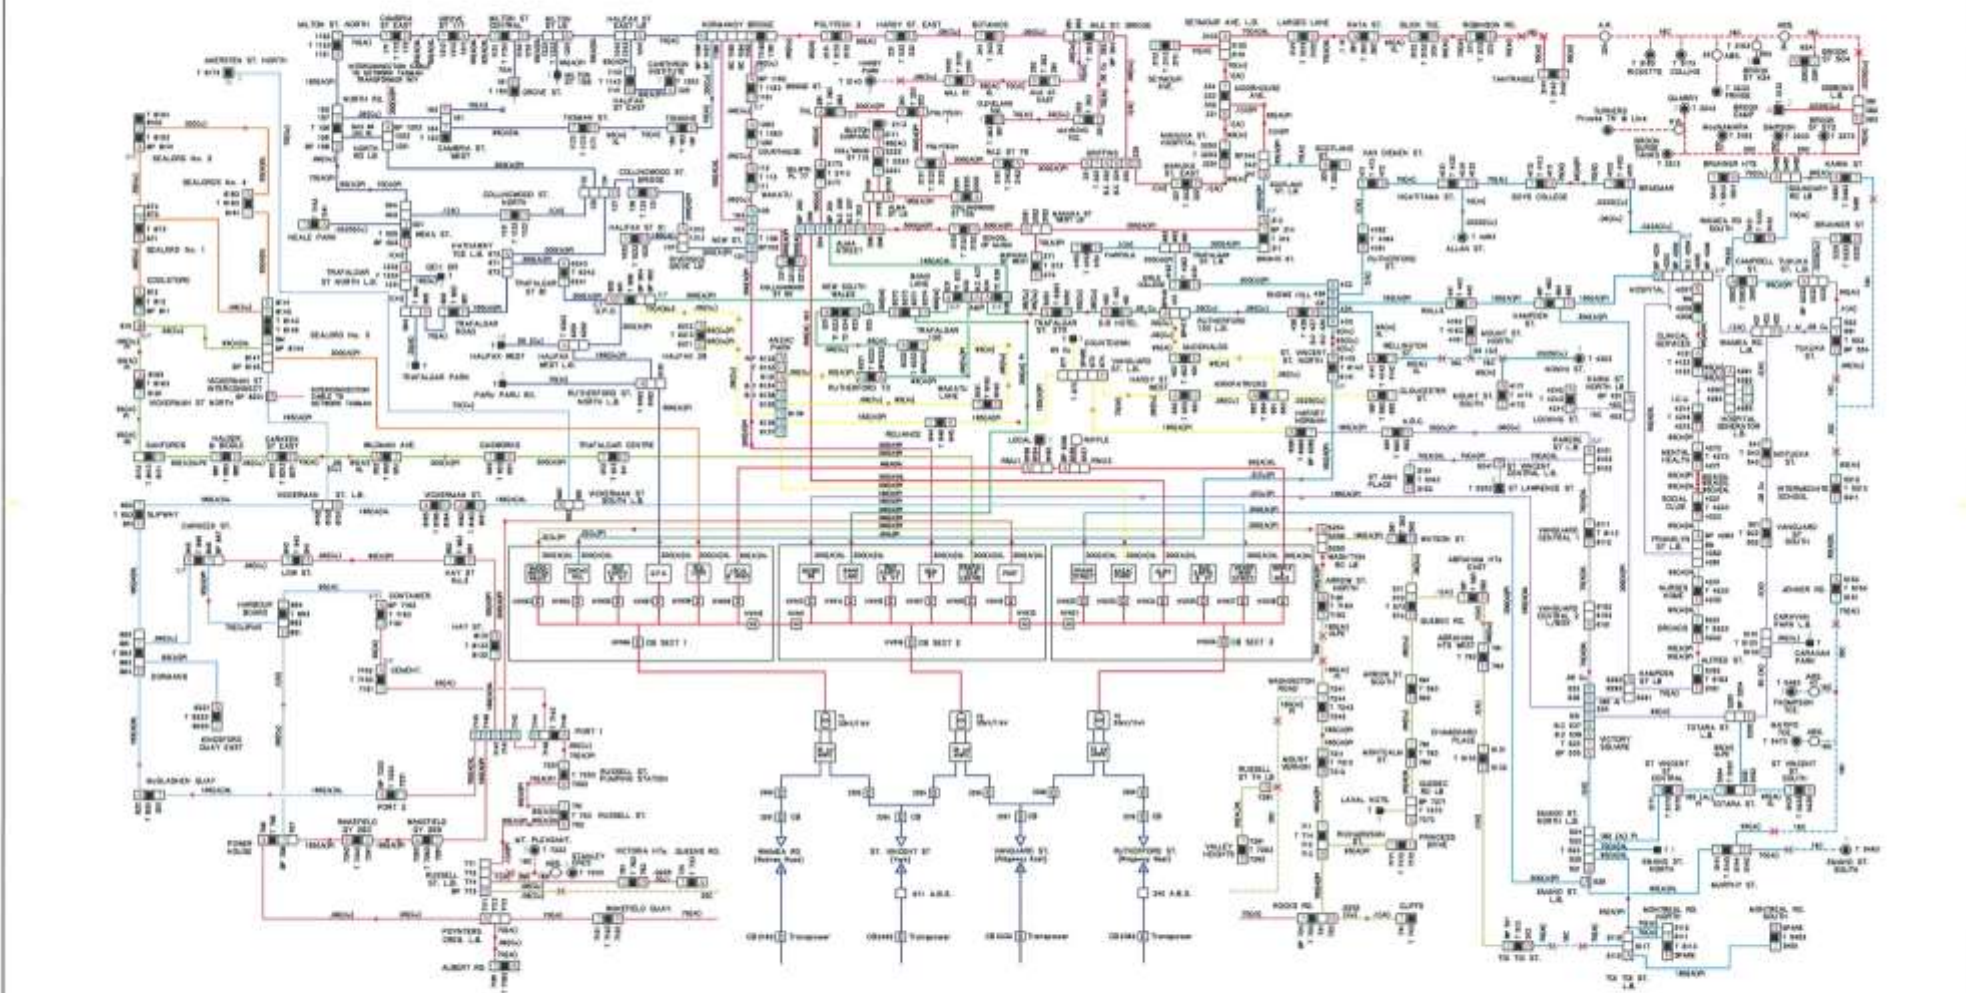

<ul style="list-style-type: none"> Line changes from LV to HV Change in cable size 125kV pole mounted transformer and switch 25kV pole mounted transformer and switch 125kV or 25kV ground transformer and switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch
CABLE CURRENT RATINGS 600V 60 AMP, 120V 100 AMP, 250V 150 AMP, 350V 200 AMP, 480V 250 AMP, 600V 300 AMP, 750V 350 AMP, 900V 400 AMP, 1200V 500 AMP	ACTUAL CURRENT RATINGS 600V 100 AMP, 120V 150 AMP, 250V 200 AMP, 350V 250 AMP, 480V 300 AMP, 600V 350 AMP, 750V 400 AMP, 900V 450 AMP, 1200V 550 AMP	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 	<ul style="list-style-type: none"> 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch 480V or 480V switch

APPENDIX E

Asset Quantities as at 31 March 2015

SCHEDULE 9a: ASSET REGISTER

This schedule requires a summary of the quantity of assets that make up the network, by asset category and asset class. All units relating to cable and line assets, that are expressed in km, refer to circuit lengths.

sch ref

sch ref	Voltage	Asset category	Asset class	Units	Items at start of year (quantity)	Items at end of year (quantity)	Net change	Data accuracy (1-4)
8	All	Overhead Line	Concrete poles / steel structure	No.	712	712	-	2
9	All	Overhead Line	Wood poles	No.	203	188	- 15	2
10	All	Overhead Line	Wood poles	No.	203	188	- 15	2
12	HV	Subtransmission Line	Subtransmission OH up to 66kV conductor	km	1	1	-	4
14	HV	Subtransmission Cable	Subtransmission UG up to 66kV (XLPE)	km	12	12	- 0	3
17	HV	Subtransmission Cable	Subtransmission UG up to 66kV (PILC)	km	6	6	-	2
23	HV	Zone substation Buildings	Zone substations up to 66kV	No.	2	1	- 1	4
28	HV	Zone substation switchgear	33kV Switch (Pole Mounted)	No.	16	-	- 16	4
30	HV	Zone substation switchgear	22/33kV CB (Indoor)	No.	10	10	-	4
31	HV	Zone substation switchgear	22/33kV CB (Outdoor)	No.	3	-	- 3	4
32	HV	Zone substation switchgear	3.3/6.6/11/22kV CB (ground mounted)	No.	41	26	- 15	4
33	HV	Zone substation switchgear	3.3/6.6/11/22kV CB (pole mounted)	No.	2	-	- 2	4
34	HV	Zone Substation Transformer	Zone Substation Transformers	No.	10	3	- 7	4
35	HV	Distribution Line	Distribution OH Open Wire Conductor	km	6	6	- 0	2
37	HV	Distribution Line	SWER conductor	km	2	2	- 0	2
38	HV	Distribution Cable	Distribution UG XLPE or PVC	km	23	23	- 0	2
39	HV	Distribution Cable	Distribution UG PILC	km	51	51	- 0	2
41	HV	Distribution switchgear	3.3/6.6/11/22kV CB (pole mounted) - reclosers and sectionalisers	No.	1	1	-	4
42	HV	Distribution switchgear	3.3/6.6/11/22kV CB (Indoor)	No.	41	41	-	3
43	HV	Distribution switchgear	3.3/6.6/11/22kV Switches and fuses (pole mounted)	No.	25	25	-	3
44	HV	Distribution switchgear	3.3/6.6/11/22kV Switch (ground mounted) - except RMU	No.	46	47	1	2
45	HV	Distribution switchgear	3.3/6.6/11/22kV RMU	No.	261	261	-	2
46	HV	Distribution Transformer	Pole Mounted Transformer	No.	18	18	-	3
47	HV	Distribution Transformer	Ground Mounted Transformer	No.	180	181	1	3
49	HV	Distribution Substations	Ground Mounted Substation Housing	No.	181	182	1	2
50	LV	LV Line	LV OH Conductor	km	23	23	- 0	2
51	LV	LV Cable	LV UG Cable	km	173	173	- 0	2
52	LV	LV Street lighting	LV OH/UG Streetlight circuit	km	71	71	- 0	2
53	LV	Connections	OH/UG consumer service connections	No.	9,173	9,213	40	3
54	All	Protection	Protection relays (electromechanical, solid state and numeric)	No.	90	75	- 15	3
55	All	SCADA and communications	SCADA and communications equipment operating as a single system	Lot	1	1	-	4
56	All	Capacitor Banks	Capacitors including controls	No	1	-	- 1	4
57	All	Load Control	Centralised plant	Lot	3	1	- 2	4

Regulatory Asset Base Value as at 31 March 2015

4(vii): Disclosure by Asset Category

(\$000 unless otherwise specified)

	Subtransmission lines	Subtransmission cables	Zone substations	Distribution and LV lines	Distribution and LV cables	Distribution substations and transformers	Distribution switchgear	Other network assets	Non-network assets	Total
Total opening RAB value	35	5,732	9,952	524	16,444	3,459	2,351	3,398	307	42,203
<i>less</i> Total depreciation	6	151	241	26	630	127	115	92	42	1,430
<i>plus</i> Total revaluations	0	5	8	0	14	3	2	3	0	35
<i>plus</i> Assets commissioned	70	46	674	23	89	59	16	111	5	1,093
<i>less</i> Asset disposals	-	-	232	-	-	-	-	-	-	232
<i>plus</i> Lost and found assets adjustment	-	-	-	-	-	-	-	-	-	-
<i>plus</i> Adjustment resulting from asset allocation										-
<i>plus</i> Asset category transfers										-
Total closing RAB value	99	5,632	10,161	521	15,917	3,394	2,254	3,420	270	41,669
Asset Life										
Weighted average remaining asset life	-	38.1	26.7	26.1	25.4	24.5	16.5	23.1	1.6	(years)
Weighted average expected total asset life	60.0	50.4	42.9	56.5	54.4	54.8	40.0	44.2	7.4	(years)

INFORMATION DISCLOSURE COMPLIANCE SCHEDULES (11-13)

SCHEDULE 11a: REPORT ON FORECAST CAPITAL EXPENDITURE

SCHEDULE 11b: REPORT ON FORECAST OPERATIONAL EXPENDITURE

SCHEDULE 12a: REPORT ON ASSET CONDITION

SCHEDULE 12b: REPORT ON FORECAST CAPACITY

SCHEDULE 12c: REPORT ON FORECAST NETWORK DEMAND

SCHEDULE 12d: REPORT FORECAST INTERRUPTIONS AND DURATION

SCHEDULE 13: REPORT ON ASSET MANAGEMENT MATURITY

SCHEDULE 11a: REPORT ON FORECAST CAPITAL EXPENDITURE

This schedule requires a breakdown of forecast expenditure on assets for the current disclosure year and a 10 year planning period. The forecasts should be consistent with the supporting information set out in the AMP. The forecast is to be expressed in both constant price and nominal dollar terms. Also required is a forecast of the value of commissioned assets (i.e., the value of RAB additions)

EDBs must provide explanatory comment on the difference between constant price and nominal dollar forecasts of expenditure on assets in Schedule 14a (Mandatory Explanatory Notes). This information is not part of audited disclosure information.

sch ref

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5	CY+6	CY+7	CY+8	CY+9	CY+10
11a(i): Expenditure on Assets Forecast	\$000 (in nominal dollars)										
Consumer connection	1	-	-	-	-	-	-	-	-	-	-
System growth	55	184	197	189	155	156	158	160	162	165	167
Asset replacement and renewal	529	535	611	576	753	1,137	1,132	1,170	1,322	1,107	1,450
Asset relocations	-	30	-	-	-	-	-	-	54	-	-
Reliability, safety and environment:											
Quality of supply	-	120	30	117	-	260	-	-	-	-	-
Legislative and regulatory	-	-	15	-	-	-	-	-	-	-	-
Other reliability, safety and environment	40	85	73	184	-	52	504	384	200	510	112
Total reliability, safety and environment	40	205	118	301	-	312	504	384	200	510	112
Expenditure on network assets	625	954	926	1,066	908	1,605	1,794	1,714	1,739	1,782	1,729
Expenditure on non-network assets	25	98	63	22	43	84	65	45	24	90	47
Expenditure on assets	650	1,052	989	1,088	951	1,690	1,859	1,759	1,763	1,872	1,776
plus Cost of financing											
less Value of capital contributions		12									
plus Value of vested assets											
Capital expenditure forecast	650	1,040	989	1,088	951	1,690	1,859	1,759	1,763	1,872	1,776
Assets commissioned	650	1,040	989	1,088	951	1,690	1,859	1,759	1,763	1,872	1,776
	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5	CY+6	CY+7	CY+8	CY+9	CY+10
	\$000 (in constant prices)										
Consumer connection	1	-	-	-	-	-	-	-	-	-	-
System growth	55	184	195	185	150	150	150	150	150	150	150
Asset replacement and renewal	529	535	605	565	731	1,093	1,077	1,097	1,221	1,007	1,300
Asset relocations	-	30	-	-	-	-	-	-	-	-	-
Reliability, safety and environment:											
Quality of supply	-	120	30	115	-	250	-	-	-	-	-
Legislative and regulatory	-	-	15	-	-	-	-	-	-	-	-
Other reliability, safety and environment	40	85	72	180	-	50	480	360	185	464	100
Total reliability, safety and environment	40	205	117	295	-	300	480	360	185	464	100
Expenditure on network assets	625	954	917	1,045	881	1,543	1,707	1,607	1,556	1,621	1,550
Expenditure on non-network assets	25	98	62	22	42	81	62	42	22	82	42
Expenditure on assets	650	1,052	979	1,067	923	1,624	1,769	1,649	1,578	1,703	1,592
Subcomponents of expenditure on assets (where known)											
Energy efficiency and demand side management, reduction of energy losses											
Overhead to underground conversion					120	120					
Research and development											
	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5	CY+6	CY+7	CY+8	CY+9	CY+10
Difference between nominal and constant price forecasts	\$000										
Consumer connection	-	-	-	-	-	-	-	-	-	-	-
System growth	-	-	2	4	5	6	8	10	12	15	17
Asset replacement and renewal	-	-	6	11	22	44	55	73	101	100	150
Asset relocations	-	-	-	-	-	-	-	-	54	-	-
Reliability, safety and environment:											
Quality of supply	-	-	0	2	-	10	-	-	-	-	-
Legislative and regulatory	-	-	0	-	-	-	-	-	-	-	-

61	Other reliability, safety and environment	-	-	1	4	-	2	24	24	15	46	12
62	Total reliability, safety and environment	-	-	1	6	-	12	24	24	15	46	12
63	Expenditure on network assets	-	-	9	21	27	63	87	107	183	161	179
64	Expenditure on non-network assets	-	-	1	0	1	3	3	3	2	8	5
65	Expenditure on assets	-	-	10	21	28	66	90	110	185	169	184

67 Current Year CY CY+1 CY+2 CY+3 CY+4 CY+5

68 **11a(ii): Consumer Connection**

Consumer types defined by EDB*		5000 (in constant prices)					
69	Group 2	1					
70	[EDB consumer type]						
71	[EDB consumer type]						
72	[EDB consumer type]						
73	[EDB consumer type]						
74	[EDB consumer type]						
75	*include additional rows if needed						
76	Consumer connection expenditure	1	-	-	-	-	-
77	less Capital contributions funding consumer connection						
78	Consumer connection less capital contributions	1	-	-	-	-	-

79 **11a(iii): System Growth**

80	Subtransmission		-	-	-	-	-
81	Zone substations		-	-	-	-	-
82	Distribution and LV lines		-	-	-	-	-
83	Distribution and LV cables		-	10	-	-	-
84	Distribution substations and transformers	55	84	85	85	50	50
85	Distribution switchgear		-	-	-	-	-
86	Other network assets		100	100	100	100	100
87	System growth expenditure	55	184	195	185	150	150
88	less Capital contributions funding system growth						
89	System growth less capital contributions	55	184	195	185	150	150

90 Current Year CY CY+1 CY+2 CY+3 CY+4 CY+5

91 **11a(iv): Asset Replacement and Renewal**

Asset Replacement and Renewal		5000 (in constant prices)					
94	Subtransmission		-	-	-	-	-
95	Zone substations		-	-	-	-	-
96	Distribution and LV lines		-	-	-	-	-
97	Distribution and LV cables	150	435	440	385	551	843
98	Distribution substations and transformers	250	-	-	-	-	-
99	Distribution switchgear	20	-	15	30	30	30
100	Other network assets	109	100	150	150	150	220
101	Asset replacement and renewal expenditure	529	535	605	565	731	1,093
102	less Capital contributions funding asset replacement and renewal						
103	Asset replacement and renewal less capital contributions	529	535	605	565	731	1,093

104 Current Year CY CY+1 CY+2 CY+3 CY+4 CY+5

105 **11a(v): Asset Relocations**

Project or programme*		5000 (in constant prices)					
109							
110							
111							
112							
113							
114	*include additional rows if needed						
115	All other project or programmes - asset relocations		30				
116	Asset relocations expenditure	-	30	-	-	-	-
117	less Capital contributions funding asset relocations						
118	Asset relocations less capital contributions	-	30	-	-	-	-

119

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
11a(vi):Quality of Supply						
<i>Project or programme*</i>	\$000 (in constant prices)					
<i>*include additional rows if needed</i>						
All other projects or programmes - quality of supply		120	30	115		250
Quality of supply expenditure		120	30	115	-	250
less Capital contributions funding quality of supply						
Quality of supply less capital contributions		120	30	115	-	250

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
11a(vii): Legislative and Regulatory						
<i>Project or programme*</i>	\$000 (in constant prices)					
<i>*include additional rows if needed</i>						
All other projects or programmes - legislative and regulatory			15			
Legislative and regulatory expenditure		-	15	-	-	-
less Capital contributions funding legislative and regulatory						
Legislative and regulatory less capital contributions		-	15	-	-	-

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
11a(viii): Other Reliability, Safety and Environment						
<i>Project or programme*</i>	\$000 (in constant prices)					
<i>*include additional rows if needed</i>						
All other projects or programmes - other reliability, safety and environment	40	85	72	180		50
Other reliability, safety and environment expenditure	40	85	72	180	-	50
less Capital contributions funding other reliability, safety and environment						
Other reliability, safety and environment less capital contributions	40	85	72	180	-	50

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
11a(ix): Non-Network Assets						
Routine expenditure	\$000 (in constant prices)					
<i>Project or programme*</i>						
Purchase of New Vehicles		59			-	59
Computers		17			-	20
Computer Network File Server			40			
Office Equipment		2	2	2	2	2
Misc		20	20	20	20	20
<i>*include additional rows if needed</i>						
All other projects or programmes - routine expenditure	25					
Routine expenditure	25	98	62	22	42	81

177	Atypical expenditure						
178	Project or programme*						
179	[Description of material project or programme]						
180	[Description of material project or programme]						
181	[Description of material project or programme]						
182	[Description of material project or programme]						
183	[Description of material project or programme]						
184	*include additional rows if needed						
185	All other projects or programmes - atypical expenditure						
186	Atypical expenditure						
187							
188	Expenditure on non-network assets	25	98	62	22	42	81

SCHEDULE 11b: REPORT ON FORECAST OPERATIONAL EXPENDITURE

This schedule requires a breakdown of forecast operational expenditure for the disclosure year and a 10 year planning period. The forecasts should be consistent with the supporting information set out in the AMP. The forecast is to be expressed in both constant price and nominal dollar terms. EDBs must provide explanatory comment on the difference between constant price and nominal dollar operational expenditure forecasts in Schedule 14a (Mandatory Explanatory Notes). This information is not part of audited disclosure information.

sch ref

	Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5	CY+6	CY+7	CY+8	CY+9	CY+10
Operational Expenditure Forecast											
\$000 (in nominal dollars)											
Service interruptions and emergencies	76	120	121	122	124	125	125	127	129	131	133
Vegetation management	30	31	31	32	32	32	32	33	33	34	34
Routine and corrective maintenance and inspection	192	230	232	235	237	239	239	243	247	250	254
Asset replacement and renewal	256	329	332	336	339	342	342	347	353	358	363
Network Opex	554	710	717	724	732	739	739	750	761	773	784
System operations and network support	300	250	253	255	258	260	260	264	268	272	276
Business support	1,100	1,150	1,162	1,173	1,185	1,197	1,197	1,215	1,233	1,251	1,270
Non-network opex	1,400	1,400	1,414	1,428	1,442	1,457	1,457	1,479	1,501	1,523	1,546
Operational expenditure	1,954	2,110	2,131	2,153	2,174	2,196	2,196	2,229	2,262	2,296	2,331
\$000 (in constant prices)											
Service interruptions and emergencies	76	120	120	120	120	120	120	120	120	120	120
Vegetation management	30	31	31	31	31	31	31	31	31	31	31
Routine and corrective maintenance and inspection	192	230	230	230	230	230	230	230	230	230	230
Asset replacement and renewal	256	329	329	329	329	329	329	329	329	329	329
Network Opex	554	710	710	710	710	710	710	710	710	710	710
System operations and network support	300	250	250	250	250	250	250	250	250	250	250
Business support	1,100	1,150	1,150	1,150	1,150	1,150	1,150	1,150	1,150	1,150	1,150
Non-network opex	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400
Operational expenditure	1,954	2,110	2,110	2,110	2,110	2,110	2,110	2,110	2,110	2,110	2,110
Subcomponents of operational expenditure (where known)											
Energy efficiency and demand side management, reduction of energy losses											
Direct billing*											
Research and Development											
Insurance											
* Direct billing expenditure by suppliers that direct bill the majority of their consumers											
Difference between nominal and real forecasts											
\$000											
Service interruptions and emergencies	-	-	1	2	4	5	5	7	9	11	13
Vegetation management	-	-	0	1	1	1	1	2	2	3	3
Routine and corrective maintenance and inspection	-	-	2	5	7	9	9	13	17	20	24
Asset replacement and renewal	-	-	3	7	10	13	13	18	24	29	34
Network Opex	-	-	7	14	22	29	29	40	51	63	74
System operations and network support	-	-	3	5	8	10	10	14	18	22	26
Business support	-	-	12	23	35	47	47	65	83	101	120
Non-network opex	-	-	14	28	42	57	57	79	101	123	146
Operational expenditure	-	-	21	42	64	86	86	119	152	186	220

SCHEDULE 12a: REPORT ON ASSET CONDITION

This schedule requires a breakdown of asset condition by asset class as at the start of the forecast year. The data accuracy assessment relates to the percentage values disclosed in the asset condition columns. Also required is a forecast of the percentage of units to be replaced in the next 5 years. All information should be consistent with the information provided in the AMP and the expenditure on assets forecast in Schedule 11a. All units relating to cable and line assets, that are expressed in km, refer to circuit lengths.

sch ref	Voltage	Asset category	Asset class	Units	Asset condition at start of planning period (percentage of units by grade)						Data accuracy (1-4)	% of asset forecast to be replaced in next 5 years
					Grade 1	Grade 2	Grade 3	Grade 4	Grade unknown			
7							80.00%	20.00%			4	1.00%
8						60.00%	20.00%	20.00%			4	1.00%
9												
10	All	Overhead Line	Concrete poles / steel structure	No.			80.00%	20.00%			4	1.00%
11	All	Overhead Line	Wood poles	No.		60.00%	20.00%	20.00%			4	1.00%
12	All	Overhead Line	Other pole types	No.						N/A		
13	HV	Subtransmission Line	Subtransmission OH up to 66kV conductor	km						N/A		-
14	HV	Subtransmission Line	Subtransmission OH 110kV+ conductor	km						N/A		-
15	HV	Subtransmission Cable	Subtransmission UG up to 66kV (XLPE)	km			100.00%				2	-
16	HV	Subtransmission Cable	Subtransmission UG up to 66kV (Oil pressurised)	km						N/A		-
17	HV	Subtransmission Cable	Subtransmission UG up to 66kV (Gas pressurised)	km						N/A		-
18	HV	Subtransmission Cable	Subtransmission UG up to 66kV (PILC)	km			100.00%				2	-
19	HV	Subtransmission Cable	Subtransmission UG 110kV+ (XLPE)	km						N/A		-
20	HV	Subtransmission Cable	Subtransmission UG 110kV+ (Oil pressurised)	km						N/A		-
21	HV	Subtransmission Cable	Subtransmission UG 110kV+ (Gas Pressurised)	km						N/A		-
22	HV	Subtransmission Cable	Subtransmission UG 110kV+ (PILC)	km						N/A		-
23	HV	Subtransmission Cable	Subtransmission submarine cable	km						N/A		-
24	HV	Zone substation Buildings	Zone substations up to 66kV	No.				100.00%			4	-
25	HV	Zone substation Buildings	Zone substations 110kV+	No.						N/A		-
26	HV	Zone substation switchgear	22/33kV CB (Indoor)	No.						N/A		-
27	HV	Zone substation switchgear	22/33kV CB (Outdoor)	No.						N/A		-
28	HV	Zone substation switchgear	33kV Switch (Ground Mounted)	No.				100.00%			4	-
29	HV	Zone substation switchgear	33kV Switch (Pole Mounted)	No.						N/A		-
30	HV	Zone substation switchgear	33kV RMU	No.						N/A		-
31	HV	Zone substation switchgear	50/66/110kV CB (Indoor)	No.						N/A		-
32	HV	Zone substation switchgear	50/66/110kV CB (Outdoor)	No.						N/A		-
33	HV	Zone substation switchgear	3.3/6.6/11/22kV CB (ground mounted)	No.				100.00%			4	-
34	HV	Zone substation switchgear	3.3/6.6/11/22kV CB (pole mounted)	No.						N/A		-
42												

Asset condition at start of planning period (percentage of units by grade)

43	Voltage	Asset category	Asset class	Units	Grade 1	Grade 2	Grade 3	Grade 4	Grade unknown	Data accuracy (1-4)	% of asset forecast to be replaced in next 5 years
44	HV	Zone Substation Transformer	Zone Substation Transformers	No.				100.00%		4	
45	HV	Distribution Line	Distribution OH Open Wire Conductor	km			90.00%	10.00%		3	5.00%
46	HV	Distribution Line	Distribution OH Aerial Cable Conductor	km					N/A		
47	HV	Distribution Line	SWER conductor	km			100.00%			3	-
48	HV	Distribution Cable	Distribution UG XLPE or PVC	km			90.00%	10.00%		2	-
49	HV	Distribution Cable	Distribution UG PILC	km			60.00%	40.00%		2	7.00%
50	HV	Distribution Cable	Distribution Submarine Cable	km					N/A		
51	HV	Distribution switchgear	3.3/6.6/11/22kV CB (pole mounted) - reclosers and sectionalisers	No.			100.00%			4	-
52	HV	Distribution switchgear	3.3/6.6/11/22kV CB (Indoor)	No.		23.00%	64.00%	13.00%		3	-
53	HV	Distribution switchgear	3.3/6.6/11/22kV Switches and fuses (pole mounted)	No.				100.00%		3	-
54	HV	Distribution switchgear	3.3/6.6/11/22kV Switch (ground mounted) - except RMU	No.				100.00%		3	-
55	HV	Distribution switchgear	3.3/6.6/11/22kV RMU	No.		1.00%	49.00%	50.00%		3	4.00%
56	HV	Distribution Transformer	Pole Mounted Transformer	No.			40.00%	60.00%		3	20.00%
57	HV	Distribution Transformer	Ground Mounted Transformer	No.		10.00%	75.00%	15.00%		3	4.00%
58	HV	Distribution Transformer	Voltage regulators	No.					N/A		
59	HV	Distribution Substations	Ground Mounted Substation Housing	No.			80.00%	20.00%		3	2.00%
60	LV	LV Line	LV OH Conductor	km			100.00%			3	2.00%
61	LV	LV Cable	LV UG Cable	km		20.00%	60.00%	20.00%		2	0.50%
62	LV	LV Streetlighting	LV OH/UG Streetlight circuit	km		30.00%	60.00%	10.00%		2	-
63	LV	Connections	OH/UG consumer service connections	No.			60.00%	40.00%		3	-
64	All	Protection	Protection relays (electromechanical, solid state and numeric)	No.			10.00%	90.00%		3	2.00%
65	All	SCADA and communications	SCADA and communications equipment operating as a single system	Lot			10.00%	90.00%		3	-
66	All	Capacitor Banks	Capacitors including controls	No.					N/A		
67	All	Load Control	Centralised plant	Lot				100.00%		4	
68	All	Load Control	Relays	No.					N/A		
69	All	Civils	Cable Tunnels	km					N/A		

SCHEDULE 12b: REPORT ON FORECAST CAPACITY

This schedule requires a breakdown of current and forecast capacity and utilisation for each zone substation and current distribution transformer capacity. The data provided should be consistent with the information provided in the AMP. Information provided in this table should relate to the operation of

sch ref

12b(i): System Growth - Zone Substations

	Current Peak Load (MVA)	Installed Firm Capacity (MVA)	Security of Supply Classification (type)	Transfer Capacity (MVA)	Utilisation of Installed Firm Capacity %	Installed Firm Capacity +5 years (MVA)	Utilisation of Installed Firm Capacity + 5yrs %	Installed Firm Capacity Constraint +5 years (cause)	Explanation
Existing Zone Substations									
[Zone Substation_01]	34	48	N-1	4	71%	48	71%	No constraint within +5 years	
[Zone Substation_02]					-			[Select one]	
[Zone Substation_03]					-			[Select one]	
[Zone Substation_04]					-			[Select one]	
[Zone Substation_05]					-			[Select one]	
[Zone Substation_06]					-			[Select one]	
[Zone Substation_07]					-			[Select one]	
[Zone Substation_08]					-			[Select one]	
[Zone Substation_09]					-			[Select one]	
[Zone Substation_10]					-			[Select one]	
[Zone Substation_11]					-			[Select one]	
[Zone Substation_12]					-			[Select one]	
[Zone Substation_13]					-			[Select one]	
[Zone Substation_14]					-			[Select one]	
[Zone Substation_15]					-			[Select one]	
[Zone Substation_16]					-			[Select one]	
[Zone Substation_17]					-			[Select one]	
[Zone Substation_18]					-			[Select one]	
[Zone Substation_19]					-			[Select one]	
[Zone Substation_20]					-			[Select one]	

¹ Extend forecast capacity table as necessary to disclose all capacity by each zone substation

SCHEDULE 12C: REPORT ON FORECAST NETWORK DEMAND

This schedule requires a forecast of new connections (by consumer type), peak demand and energy volumes for the disclosure year and a 5 year planning period. The forecasts should be consistent with the supporting information set out in the AMP as well as the assumptions used in developing the expenditure forecasts in Schedule 11a and Schedule 11b and the capacity and utilisation forecasts in Schedule 12b.

sch ref

		Number of connections					
		Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
7	12c(i): Consumer Connections						
8	Number of ICPs connected in year by consumer type						
9							
10							
11	Consumer types defined by EDB*						
12	Load Group 0 (Unmetered and Builders Temporary)	49	50	50	50	50	50
13	Load Group 1 (Low User)	3,455	3,667	3,867	4,067	4,267	4,467
14	Load Group 2 (Mass Market - Residential)	4,204	4,009	3,854	3,698	3,543	3,387
15	Load Group 2 (Mass Market - Business)	1,398	1,403	1,408	1,413	1,418	1,423
16	Load Group 3 (Time of Use)	93	95	95	96	96	97
17	Connections total	9,199	9,224	9,274	9,324	9,374	9,424
18	*include additional rows if needed						
19	Distributed generation						
20	Number of connections	72	97	137	187	267	377
21	Capacity of distributed generation installed in year (MVA)	2.3	2.4	2.5	2.6	2.9	3.2
22	12c(ii) System Demand						
23							
24	Maximum coincident system demand (MW)						
25	GXP demand	33	33	33	33	33	33
26	plus Distributed generation output at HV and above	-	-	-	-	-	-
27	Maximum coincident system demand	33	33	33	33	33	33
28	less Net transfers to (from) other EDBs at HV and above						
29	Demand on system for supply to consumers' connection points	33	33	33	33	33	33
30	Electricity volumes carried (GWh)						
31	Electricity supplied from GXPs	144	143	141	139	137	136
32	less Electricity exports to GXPs	-	-	-	-	-	-
33	plus Electricity supplied from distributed generation	0	0	1	1	1	2
34	less Net electricity supplied to (from) other EDBs	-	-	-	-	-	-
35	Electricity entering system for supply to ICPs	144	143	142	140	139	137
36	less Total energy delivered to ICPs	139	138	136	135	133	132
37	Losses	5	5	5	5	5	5
38							
39	Load factor	50%	49%	49%	48%	48%	47%
40	Loss ratio	3.7%	3.8%	3.8%	3.8%	3.8%	3.8%

Company Name

Nelson Electricity Ltd

AMP Planning Period

1 April 2016 - 31 March 2026

Network / Sub-network Name

SCHEDULE 12d: REPORT FORECAST INTERRUPTIONS AND DURATION

This schedule requires a forecast of SAIFI and SAIDI for disclosure and a 5 year planning period. The forecasts should be consistent with the supporting information set out in the AMP as well as the assumed impact of planned and unplanned SAIFI and SAIDI on the

sch ref			Current Year CY	CY+1	CY+2	CY+3	CY+4	CY+5
		for year ended	31 Mar 15	31 Mar 16	31 Mar 17	31 Mar 18	31 Mar 19	31 Mar 20
8								
9								
10	SAIDI							
11	Class B (planned interruptions on the network)		0.6	15.0	15.0	15.0	15.0	15.0
12	Class C (unplanned interruptions on the network)		10.4	30.0	30.0	30.0	30.0	30.0
13	SAIFI							
14	Class B (planned interruptions on the network)		0.00	0.30	0.30	0.30	0.30	0.30
15	Class C (unplanned interruptions on the network)		0.22	0.60	0.60	0.60	0.60	0.60

SCHEDULE 13: REPORT ON ASSET MANAGEMENT MATURITY

This schedule requires information on the EDB'S self-assessment of the maturity of its asset management practices .

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
3	Asset management policy	To what extent has an asset management policy been documented, authorised and communicated?	2	The AMP sets out a broad description of Objectives and Processes which could be considered to embody policy.	The AMP contains a written AM Policy which is also on the website. DELTA the mani electrical contractor to NEL is made aware of NEL's long-term asset plans.	Widely used AM practice standards require an organisation to document, authorise and communicate its asset management policy (eg, as required in PAS 55 para 4.2 i). A key pre-requisite of any robust policy is that the organisation's top management must be seen to endorse and fully support it. Also vital to the effective implementation of the policy, is to tell the appropriate people of its content and their obligations under it. Where an organisation outsources some of its asset-related activities, then these people and their organisations must equally be made aware of the policy's content. Also, there may be other stakeholders, such as regulatory authorities and shareholders who should be made aware of it.	Top management. The management team that has overall responsibility for asset management.	The organisation's asset management policy, its organisational strategic plan, documents indicating how the asset management policy was based upon the needs of the organisation and evidence of communication.
10	Asset management strategy	What has the organisation done to ensure that its asset management strategy is consistent with other appropriate organisational policies and strategies, and the needs of stakeholders?	3	Section 4.10 of the AMP records a major customer face to face survey in which the 20 largest customers expressed a preference to pay about the same to receive about the same reliability. This view also supported by a mass market telephone survey of 200 consumers. The projected constant SAIDI reflects this preference. Work streams such as the PSMS are further evidence of alignment to stated goals and wider stakeholder requirements.	Customer surveys are a key input to the AM Process, which matches reliability and hence work to customer preferences to have about the same reliability.	In setting an organisation's asset management strategy, it is important that it is consistent with any other policies and strategies that the organisation has and has taken into account the requirements of relevant stakeholders. This question examines to what extent the asset management strategy is consistent with other organisational policies and strategies (eg, as required by PAS 55 para 4.3.1 b) and has taken account of stakeholder requirements as required by PAS 55 para 4.3.1 c). Generally, this will take into account the same policies, strategies and stakeholder requirements as covered in drafting the asset management policy but at a greater level of detail.	Top management. The organisation's strategic planning team. The management team that has overall responsibility for asset management.	The organisation's asset management strategy document and other related organisational policies and strategies. Other than the organisation's strategic plan, these could include those relating to health and safety, environmental, etc. Results of stakeholder consultation.
11	Asset management strategy	In what way does the organisation's asset management strategy take account of the lifecycle of the assets, asset types and asset systems over which the organisation has stewardship?	3	Oil Tests, Earth Tests and Megger Test records have been inspected.	All assets are inspected on a regular basis reflecting their criticality. Returned inspection data is recorded and outlying data is marked for intervention. Inspection check sheets are amended when new assets are added or removed. Safety bulletins such as EEA notices are circulated to all staff and trigger a review of NEL's assets. Urgent action will be taken if an asset is considered to be in a dangerous / unsafe condition.	Good asset stewardship is the hallmark of an organisation compliant with widely used AM standards. A key component of this is the need to take account of the lifecycle of the assets, asset types and asset systems. (For example, this requirement is recognised in 4.3.1 d) of PAS 55). This question explores what an organisation has done to take lifecycle into account in its asset management strategy.	Top management. People in the organisation with expert knowledge of the assets, asset types, asset systems and their associated life-cycles. The management team that has overall responsibility for asset management. Those responsible for developing and adopting methods and processes used in asset management	The organisation's documented asset management strategy and supporting working documents.
26	Asset management plan(s)	How does the organisation establish and document its asset management plan(s) across the life cycle activities of its assets and asset systems?	3	The Network Extension Design & Construction Standards manual has been inspected, and it is confirmed that this embodies typical power engineering standards and principles.	Policies, Standards etc are in place for all lifecycle phases. These are controlled documents for which variations to scope, quality, materials etc must be approved by NEL. The asset database generates lifecycle activities as new assets are added.	The asset management strategy need to be translated into practical plan(s) so that all parties know how the objectives will be achieved. The development of plan(s) will need to identify the specific tasks and activities required to optimize costs, risks and performance of the assets and/or asset system(s), when they are to be carried out and the resources required.	The management team with overall responsibility for the asset management system. Operations, maintenance and engineering managers.	The organisation's asset management plan(s).

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
3	Asset management policy	To what extent has an asset management policy been documented, authorised and communicated?	The organisation does not have a documented asset management policy.	The organisation has an asset management policy, but it has not been authorised by top management, or it is not influencing the management of the assets.	The organisation has an asset management policy, which has been authorised by top management, but it has had limited circulation. It may be in use to influence development of strategy and planning but its effect is limited.	The asset management policy is authorised by top management, is widely and effectively communicated to all relevant employees and stakeholders, and used to make these persons aware of their asset related obligations.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
10	Asset management strategy	What has the organisation done to ensure that its asset management strategy is consistent with other appropriate organisational policies and strategies, and the needs of stakeholders?	The organisation has not considered the need to ensure that its asset management strategy is appropriately aligned with the organisation's other organisational policies and strategies or with stakeholder requirements. OR The organisation does not have an asset management strategy.	The need to align the asset management strategy with other organisational policies and strategies as well as stakeholder requirements is understood and work has started to identify the linkages or to incorporate them in the drafting of asset management strategy.	Some of the linkages between the long-term asset management strategy and other organisational policies, strategies and stakeholder requirements are defined but the work is fairly well advanced but still incomplete.	All linkages are in place and evidence is available to demonstrate that, where appropriate, the organisation's asset management strategy is consistent with its other organisational policies and strategies. The organisation has also identified and considered the requirements of relevant stakeholders.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
11	Asset management strategy	In what way does the organisation's asset management strategy take account of the lifecycle of the assets, asset types and asset systems over which the organisation has stewardship?	The organisation has not considered the need to ensure that its asset management strategy is produced with due regard to the lifecycle of the assets, asset types or asset systems that it manages. OR The organisation does not have an asset management strategy.	The need is understood, and the organisation is drafting its asset management strategy to address the lifecycle of its assets, asset types and asset systems.	The long-term asset management strategy takes account of the lifecycle of some, but not all, of its assets, asset types and asset systems.	The asset management strategy takes account of the lifecycle of all of its assets, asset types and asset systems.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
26	Asset management plan(s)	How does the organisation establish and document its asset management plan(s) across the life cycle activities of its assets and asset systems?	The organisation does not have an identifiable asset management plan(s) covering asset systems and critical assets.	The organisation has asset management plan(s) but they are not aligned with the asset management strategy and objectives and do not take into consideration the full asset life cycle (including asset creation, acquisition, enhancement, utilisation, maintenance decommissioning and disposal).	The organisation is in the process of putting in place comprehensive, documented asset management plan(s) that cover all life cycle activities, clearly aligned to asset management objectives and the asset management strategy.	Asset management plan(s) are established, documented, implemented and maintained for asset systems and critical assets to achieve the asset management strategy and asset management objectives across all life cycle phases.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
27	Asset management plan(s)	How has the organisation communicated its plan(s) to all relevant parties to a level of detail appropriate to the receiver's role in their delivery?	3	Section 5.4 of the AMP sets out the 10 year indicative work program that includes the scope and timing projects. The OpEx is presented in Section 6.1.	DELTA the key electrical contractor are given the AMP which includes a 10 year work program, it is not clear that other electrical contractors read the AMP. Detailed work programs are based on asset inspection results and provided to DELTA at least 1 month ahead.	Plans will be ineffective unless they are communicated to all those, including contracted suppliers and those who undertake enabling function(s). The plan(s) need to be communicated in a way that is relevant to those who need to use them.	The management team with overall responsibility for the asset management system. Delivery functions and suppliers.	Distribution lists for plan(s). Documents derived from plan(s) which detail the receivers role in plan delivery. Evidence of communication.
29	Asset management plan(s)	How are designated responsibilities for delivery of asset plan actions documented?	3	Section 2.6 of the AMP describes each NEL staff members role in detail. The AMP also sets out the Board and General Manager's delegated authorities.	The AMP describes AM responsibilities, and that Job Descriptions also include key AM responsibilities. NEL also has established delegated authorities.	The implementation of asset management plan(s) relies on (1) actions being clearly identified, (2) an owner allocated and (3) that owner having sufficient delegated responsibility and authority to carry out the work required. It also requires alignment of actions across the organisation. This question explores how well the plan(s) set out responsibility for delivery of asset plan actions.	The management team with overall responsibility for the asset management system. Operations, maintenance and engineering managers. If appropriate, the performance management team.	The organisation's asset management plan(s). Documentation defining roles and responsibilities of individuals and organisational departments.
31	Asset management plan(s)	What has the organisation done to ensure that appropriate arrangements are made available for the efficient and cost effective implementation of the plan(s)? (Note this is about resources and enabling support)	2	There is no evidence that resources are inadequate eg. increasing backlogs of work.	There is no sign that NEL's engineering resources are inadequate. Additional engineering expertise is available from Network Tasman when or if required. There is some flexibility with planned work if contractors need to focus on emergency work. Engineering succession planning is a key issue for NEL given the low number of staff, Network Tasman provide a back up resource if required. There is a contestible contracting model working with NEL, this is working	It is essential that the plan(s) are realistic and can be implemented, which requires appropriate resources to be available and enabling mechanisms in place. This question explores how well this is achieved. The plan(s) not only need to consider the resources directly required and timescales, but also the enabling activities, including for example, training requirements, supply chain capability and procurement timescales.	The management team with overall responsibility for the asset management system. Operations, maintenance and engineering managers. If appropriate, the performance management team. Where appropriate the procurement team and service providers working on the organisation's asset-related activities.	The organisation's asset management plan(s). Documented processes and procedures for the delivery of the asset management plan.
33	Contingency planning	What plan(s) and procedure(s) does the organisation have for identifying and responding to incidents and emergency situations and ensuring continuity of critical asset management activities?	3	The Emergency Recovery Plan is consistent with other EDB's Plans.	An Emergency Recovery Plan is in place. This plan identifies the additional field service resources that are available. Alignment with NTL and the NCC has been confirmed. NEL is an active participant in Lifelines and so will have access to all necessary resources if required in an emergency situation.	Widely used AM practice standards require that an organisation has plan(s) to identify and respond to emergency situations. Emergency plan(s) should outline the actions to be taken to respond to specified emergency situations and ensure continuity of critical asset management activities including the communication to, and involvement of, external agencies. This question assesses if, and how well, these plan(s) triggered, implemented and resolved in the event of an incident. The plan(s) should be appropriate to the level of risk as determined by the organisation's risk assessment methodology. It is also a requirement that relevant personnel are competent and trained.	The manager with responsibility for developing emergency plan(s). The organisation's risk assessment team. People with designated duties within the plan(s) and procedure(s) for dealing with incidents and emergency situations.	The organisation's plan(s) and procedure(s) for dealing with emergencies. The organisation's risk assessments and risk registers.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
27	Asset management plan(s)	How has the organisation communicated its plan(s) to all relevant parties to a level of detail appropriate to the receiver's role in their delivery?	The organisation does not have plan(s) or their distribution is limited to the authors.	The plan(s) are communicated to some of those responsible for delivery of the plan(s). OR Communicated to those responsible for delivery is either irregular or ad-hoc.	The plan(s) are communicated to most of those responsible for delivery but there are weaknesses in identifying relevant parties resulting in incomplete or inappropriate communication. The organisation recognises improvement is needed as is working towards resolution.	The plan(s) are communicated to all relevant employees, stakeholders and contracted service providers to a level of detail appropriate to their participation or business interests in the delivery of the plan(s) and there is confirmation that they are being used effectively.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
29	Asset management plan(s)	How are designated responsibilities for delivery of asset plan actions documented?	The organisation has not documented responsibilities for delivery of asset plan actions.	Asset management plan(s) inconsistently document responsibilities for delivery of plan actions and activities and/or responsibilities and authorities for implementation inadequate and/or delegation level inadequate to ensure effective delivery and/or contain misalignments with organisational accountability.	Asset management plan(s) consistently document responsibilities for the delivery of actions but responsibility/authority levels are inappropriate/ inadequate, and/or there are misalignments within the organisation.	Asset management plan(s) consistently document responsibilities for the delivery actions and there is adequate detail to enable delivery of actions. Designated responsibility and authority for achievement of asset plan actions is appropriate.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
31	Asset management plan(s)	What has the organisation done to ensure that appropriate arrangements are made available for the efficient and cost effective implementation of the plan(s)? (Note this is about resources and enabling support)	The organisation has not considered the arrangements needed for the effective implementation of plan(s).	The organisation recognises the need to ensure appropriate arrangements are in place for implementation of asset management plan(s) and is in the process of determining an appropriate approach for achieving this.	The organisation has arrangements in place for the implementation of asset management plan(s) but the arrangements are not yet adequately efficient and/or effective. The organisation is working to resolve existing weaknesses.	The organisation's arrangements fully cover all the requirements for the efficient and cost effective implementation of asset management plan(s) and realistically address the resources and timescales required, and any changes needed to functional policies, standards, processes and the asset management information system.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
33	Contingency planning	What plan(s) and procedure(s) does the organisation have for identifying and responding to incidents and emergency situations and ensuring continuity of critical asset management activities?	The organisation has not considered the need to establish plan(s) and procedure(s) to identify and respond to incidents and emergency situations.	The organisation has some ad-hoc arrangements to deal with incidents and emergency situations, but these have been developed on a reactive basis in response to specific events that have occurred in the past.	Most credible incidents and emergency situations are identified. Either appropriate plan(s) and procedure(s) are incomplete for critical activities or they are inadequate. Training/ external alignment may be incomplete.	Appropriate emergency plan(s) and procedure(s) are in place to respond to credible incidents and manage continuity of critical asset management activities consistent with policies and asset management objectives. Training and external agency alignment is in place.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
37	Structure, authority and responsibilities	What has the organisation done to appoint member(s) of its management team to be responsible for ensuring that the organisation's assets deliver the requirements of the asset management strategy, objectives and plan(s)?	3	Section 2.6 of the AMP records the General Manager's responsibilities and authorities.	P.Goodall, the General Manager has been appointed to manage NEL's daily activities under the delegated authority of the Board.	In order to ensure that the organisation's assets and asset systems deliver the requirements of the asset management policy, strategy and objectives responsibilities need to be allocated to appropriate people who have the necessary authority to fulfil their responsibilities. (This question, relates to the organisation's assets eg, para b), s 4.4.1 of PAS 55, making it therefore distinct from the requirement contained in para a), s 4.4.1 of PAS 55).	Top management. People with management responsibility for the delivery of asset management policy, strategy, objectives and plan(s). People working on asset-related activities.	Evidence that managers with responsibility for the delivery of asset management policy, strategy, objectives and plan(s) have been appointed and have assumed their responsibilities. Evidence may include the organisation's documents relating to its asset management system, organisational charts, job descriptions of post-holders, annual targets/objectives and personal development plan(s) of post-holders as appropriate.
40	Structure, authority and responsibilities	What evidence can the organisation's top management provide to demonstrate that sufficient resources are available for asset management?	3	Discussions with P.Goodall indicated that there is no clear evidence of under-staffing either within NEL or within DELTA the key electrical contractor, as measured by an increasing backlog of work not done. This is notwithstanding a constant minor backlog of work (eg. wet day jobs) and an acceptance of some flexibility with field crews (eg. pulling staff off planned maintenance during big storms).	There are no backlogs of engineering or planning work, inspections or maintenance. Although the minor CapEx budget is under spent (genuine reasons such as deferral of growth related projects due to declining consumption and flat peak demand) there is no evidence that asset condition is declining. The AMP anticipates increasing renewals in 4 years, however no firm resourcing plans are in place yet.	Optimal asset management requires top management to ensure sufficient resources are available. In this context the term 'resources' includes manpower, materials, funding and service provider support.	Top management. The management team that has overall responsibility for asset management. Risk management team. The organisation's managers involved in day-to-day supervision of asset-related activities, such as frontline managers, engineers, foremen and chargehands as appropriate.	Evidence demonstrating that asset management plan(s) and/or the process(es) for asset management plan implementation consider the provision of adequate resources in both the short and long term. Resources include funding, materials, equipment, services provided by third parties and personnel (internal and service providers) with appropriate skills competencies and knowledge.
42	Structure, authority and responsibilities	To what degree does the organisation's top management communicate the importance of meeting its asset management requirements?	3	Section 2.6 of the AMP records that the Board meeting agenda includes outage data, safety performance, works performance and financial performance.	The requirement to report SAIDI, OpEx and Capex to the Board places a continual emphasis on AM outcomes. In a very small company such as NEL, events such as outages or asset failures involve all 4 staff. All field services contracts require the contractor to guarantee their work for 5 years, emphasising the importance that NEL places on supply reliability.	Widely used AM practice standards require an organisation to communicate the importance of meeting its asset management requirements such that personnel fully understand, take ownership of, and are fully engaged in the delivery of the asset management requirements (eg, PAS 55 s 4.4.1 g).	Top management. The management team that has overall responsibility for asset management. People involved in the delivery of the asset management requirements.	Evidence of such activities as road shows, written bulletins, workshops, team talks and management walk-about would assist an organisation to demonstrate it is meeting this requirement of PAS 55.
45	Outsourcing of asset management activities	Where the organisation has outsourced some of its asset management activities, how has it ensured that appropriate controls are in place to ensure the compliant delivery of its organisational strategic plan, and its asset management policy and strategy?	3	The Network Extension Design & Construction Standards manual has been inspected. A tender RFP for a new 11kV substation was inspected, and confirmed as embodying suitable controls such as references to NEL's design and construction standards, the NCC street works standards, as-built requirements etc.	NEL controls work quality using the Design Standards Manual, Construction Standards Manual and various maintenance procedures. Minor works contractors complete a check-list of key safety and quality items for each job, and Operations Manager audits a sample of those check-lists. The major project completion check-list includes a range of safety and quality items to be signed off by Network Manager. There have been instances of errors eg. NCC have not advised NEL of altered road configuration (DELTA has amended its cable location policy) eg. a contractor installed NTL's fuse configurations in pillar boxes (corrected at contractors expense). P.Goodall indicated that the DELTA contract includes some processes for ordering re-work of sub-standard work.	Where an organisation chooses to outsource some of its asset management activities, the organisation must ensure that these outsourced process(es) are under appropriate control to ensure that all the requirements of widely used AM standards (eg, PAS 55) are in place, and the asset management policy, strategy objectives and plan(s) are delivered. This includes ensuring capabilities and resources across a time span aligned to life cycle management. The organisation must put arrangements in place to control the outsourced activities, whether it be to external providers or to other in-house departments. This question explores what the organisation does in this regard.	Top management. The management team that has overall responsibility for asset management. The manager(s) responsible for the monitoring and management of the outsourced activities. People involved with the procurement of outsourced activities. The people within the organisations that are performing the outsourced activities. The people impacted by the outsourced activity.	The organisation's arrangements that detail the compliance required of the outsourced activities. For example, this this could form part of a contract or service level agreement between the organisation and the suppliers of its outsourced activities. Evidence that the organisation has demonstrated to itself that it has assurance of compliance of outsourced activities.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
37	Structure, authority and responsibilities	What has the organisation done to appoint member(s) of its management team to be responsible for ensuring that the organisation's assets deliver the requirements of the asset management strategy, objectives and plan(s)?	Top management has not considered the need to appoint a person or persons to ensure that the organisation's assets deliver the requirements of the asset management strategy, objectives and plan(s).	Top management understands the need to appoint a person or persons to ensure that the organisation's assets deliver the requirements of the asset management strategy, objectives and plan(s).	Top management has appointed an appropriate people to ensure the assets deliver the requirements of the asset management strategy, objectives and plan(s) but their areas of responsibility are not fully defined and/or they have insufficient delegated authority to fully execute their responsibilities.	The appointed person or persons have full responsibility for ensuring that the organisation's assets deliver the requirements of the asset management strategy, objectives and plan(s). They have been given the necessary authority to achieve this.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
40	Structure, authority and responsibilities	What evidence can the organisation's top management provide to demonstrate that sufficient resources are available for asset management?	The organisation's top management has not considered the resources required to deliver asset management.	The organisations top management understands the need for sufficient resources but there are no effective mechanisms in place to ensure this is the case.	A process exists for determining what resources are required for its asset management activities and in most cases these are available but in some instances resources remain insufficient.	An effective process exists for determining the resources needed for asset management and sufficient resources are available. It can be demonstrated that resources are matched to asset management requirements.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
42	Structure, authority and responsibilities	To what degree does the organisation's top management communicate the importance of meeting its asset management requirements?	The organisation's top management has not considered the need to communicate the importance of meeting asset management requirements.	The organisations top management understands the need to communicate the importance of meeting its asset management requirements but does not do so.	Top management communicates the importance of meeting its asset management requirements but only to parts of the organisation.	Top management communicates the importance of meeting its asset management requirements to all relevant parts of the organisation.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
45	Outsourcing of asset management activities	Where the organisation has outsourced some of its asset management activities, how has it ensured that appropriate controls are in place to ensure the compliant delivery of its organisational strategic plan, and its asset management policy and strategy?	The organisation has not considered the need to put controls in place.	The organisation controls its outsourced activities on an ad-hoc basis, with little regard for ensuring for the compliant delivery of the organisational strategic plan and/or its asset management policy and strategy.	Controls systematically considered but currently only provide for the compliant delivery of some, but not all, aspects of the organisational strategic plan and/or its asset management policy and strategy. Gaps exist.	Evidence exists to demonstrate that outsourced activities are appropriately controlled to provide for the compliant delivery of the organisational strategic plan, asset management policy and strategy, and that these controls are integrated into the asset management system	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
48	Training, awareness and competence	How does the organisation develop plan(s) for the human resources required to undertake asset management activities - including the development and delivery of asset management strategy, process(es), objectives and plan(s)?	2		Succession issues are certainly discussed at board and staff level, and have been raised in annual performance reports. Succession management is difficult given the low number of staff, and in the event of any shortcomings due to an unexpected change, depending on the expertise requirement either shareholder will assist with provision of the required resource.	There is a need for an organisation to demonstrate that it has considered what resources are required to develop and implement its asset management system. There is also a need for the organisation to demonstrate that it has assessed what development plan(s) are required to provide its human resources with the skills and competencies to develop and implement its asset management systems. The timescales over which the plan(s) are relevant should be commensurate with the planning horizons within the asset management strategy considers e.g. if the asset management strategy considers 5, 10 and 15 year time scales then the human resources development plan(s) should align with these. Resources include both 'in house' and external resources who undertake asset management activities.	Senior management responsible for agreement of plan(s). Managers responsible for developing asset management strategy and plan(s). Managers with responsibility for development and recruitment of staff (including HR functions). Staff responsible for training. Procurement officers. Contracted service providers.	Evidence of analysis of future work load plan(s) in terms of human resources. Document(s) containing analysis of the organisation's own direct resources and contractors resource capability over suitable timescales. Evidence, such as minutes of meetings, that suitable management forums are monitoring human resource development plan(s). Training plan(s), personal development plan(s), contract and service level agreements.
49	Training, awareness and competence	How does the organisation identify competency requirements and then plan, provide and record the training necessary to achieve the competencies?	3	Contractor safety training and authorisation records have been inspected.	Field services safety training and competencies are done to a very high level. External contractors including DELTA have to provide evidence of individual staff training and competency. Relevant courses are attended by NEL staff, 2 staff attend the annual EEA conference. New assets include a demonstration by the supplier, and NEL will compile operating instructions. The AMP anticipates an increased number of field services contractors will be required in the medium-to-long term, and that the required competencies will be available as the network ages.	Widely used AM standards require that organisations to undertake a systematic identification of the asset management awareness and competencies required at each level and function within the organisation. Once identified the training required to provide the necessary competencies should be planned for delivery in a timely and systematic way. Any training provided must be recorded and maintained in a suitable format. Where an organisation has contracted service providers in place then it should have a means to demonstrate that this requirement is being met for their employees. (eg, PAS 55 refers to frameworks suitable for identifying competency requirements).	Senior management responsible for agreement of plan(s). Managers responsible for developing asset management strategy and plan(s). Managers with responsibility for development and recruitment of staff (including HR functions). Staff responsible for training. Procurement officers. Contracted service providers.	Evidence of an established and applied competency requirements assessment process and plan(s) in place to deliver the required training. Evidence that the training programme is part of a wider, co-ordinated asset management activities training and competency programme. Evidence that training activities are recorded and that records are readily available (for both direct and contracted service provider staff) e.g. via organisation wide information system or local records database.
50	Training, awareness and competence	How does the organization ensure that persons under its direct control undertaking asset management related activities have an appropriate level of competence in terms of education, training or experience?	3	A tender request for construction of an 11kV substation has been inspected, and clearly sets out that only AHC authorised contractors can bid for the work. DELTA's responses to the Faults and the Preventive Maintenance tenders have been inspected, and clearly state DELTA's health and safety policies.	NEL has tight controls to ensure that only AHC approved contractors can access, operate or work on the network. Specialist resources such as civil works would be sub-contracted by the lead AHC approved electrical contractor, however NEL's tender documents specify that relevant safety and design codes must be met.	A critical success factor for the effective development and implementation of an asset management system is the competence of persons undertaking these activities. organisations should have effective means in place for ensuring the competence of employees to carry out their designated asset management function(s). Where an organisation has contracted service providers undertaking elements of its asset management system then the organisation shall assure itself that the outsourced service provider also has suitable arrangements in place to manage the competencies of its employees. The organisation should ensure that the individual and corporate competencies it requires are in place and actively monitor, develop and maintain an appropriate balance of these competencies.	Managers, supervisors, persons responsible for developing training programmes. Staff responsible for procurement and service agreements. HR staff and those responsible for recruitment.	Evidence of a competency assessment framework that aligns with established frameworks such as the asset management Competencies Requirements Framework (Version 2.0); National Occupational Standards for Management and Leadership; UK Standard for Professional Engineering Competence, Engineering Council, 2005.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
48	Training, awareness and competence	How does the organisation develop plan(s) for the human resources required to undertake asset management activities - including the development and delivery of asset management strategy, process(es), objectives and plan(s)?	The organisation has not recognised the need for assessing human resources requirements to develop and implement its asset management system.	The organisation has recognised the need to assess its human resources requirements and to develop a plan(s). There is limited recognition of the need to align these with the development and implementation of its asset management system.	The organisation has developed a strategic approach to aligning competencies and human resources to the asset management system including the asset management plan but the work is incomplete or has not been consistently implemented.	The organisation can demonstrate that plan(s) are in place and effective in matching competencies and capabilities to the asset management system including the plan for both internal and contracted activities. Plans are reviewed integral to asset management system process(es).	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
49	Training, awareness and competence	How does the organisation identify competency requirements and then plan, provide and record the training necessary to achieve the competencies?	The organisation does not have any means in place to identify competency requirements.	The organisation has recognised the need to identify competency requirements and then plan, provide and record the training necessary to achieve the competencies.	The organisation is the process of identifying competency requirements aligned to the asset management plan(s) and then plan, provide and record appropriate training. It is incomplete or inconsistently applied.	Competency requirements are in place and aligned with asset management plan(s). Plans are in place and effective in providing the training necessary to achieve the competencies. A structured means of recording the competencies achieved is in place.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
50	Training, awareness and competence	How does the organization ensure that persons under its direct control undertaking asset management related activities have an appropriate level of competence in terms of education, training or experience?	The organization has not recognised the need to assess the competence of person(s) undertaking asset management related activities.	Competency of staff undertaking asset management related activities is not managed or assessed in a structured way, other than formal requirements for legal compliance and safety management.	The organization is in the process of putting in place a means for assessing the competence of person(s) involved in asset management activities including contractors. There are gaps and inconsistencies.	Competency requirements are identified and assessed for all persons carrying out asset management related activities - internal and contracted. Requirements are reviewed and staff reassessed at appropriate intervals aligned to asset management requirements.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/documented Information
53	Communication, participation and consultation	How does the organisation ensure that pertinent asset management information is effectively communicated to and from employees and other stakeholders, including contracted service providers?	3	Asset audit reports examinations and asset checks in the field are undertaken to ensure consistency between asset audit results. Any inconsistencies are relayed back to relevant parties. Weekly meetings with DELTA to discuss any issues.	Asset inspection check sheets are systematically completed and passed back to NEL from DELTA for data entry and action. The works auditing program results in a comprehensive report that may result in targeted inspections. It is noted that changing pole inspectors resulted in a different threshold being adopted and a consequent increase in pole maintenance - this was a key reason for adopting a 2nd tier of close-in inspections before ordering replacement.	Widely used AM practice standards require that pertinent asset management information is effectively communicated to and from employees and other stakeholders including contracted service providers. Pertinent information refers to information required in order to effectively and efficiently comply with and deliver asset management strategy, plan(s) and objectives. This will include for example the communication of the asset management policy, asset performance information, and planning information as appropriate to contractors.	Top management and senior management representative(s), employee's representative(s), employee's trade union representative(s); contracted service provider management and employee representative(s); representative(s) from the organisation's Health, Safety and Environmental team. Key stakeholder representative(s).	Asset management policy statement prominently displayed on notice boards, intranet and internet; use of organisation's website for displaying asset performance data; evidence of formal briefings to employees, stakeholders and contracted service providers; evidence of inclusion of asset management issues in team meetings and contracted service provider contract meetings; newsletters, etc.
59	Asset Management System documentation	What documentation has the organisation established to describe the main elements of its asset management system and interactions between them?	3	Sections 2.8 to 2.15 of the AMP describe the key AM systems, the data contained and typical user requirements.		Widely used AM practice standards require an organisation maintain up to date documentation that ensures that its asset management systems (ie, the systems the organisation has in place to meet the standards) can be understood, communicated and operated. (eg, s 4.5 of PAS 55 requires the maintenance of up to date documentation of the asset management system requirements specified throughout s 4 of PAS 55).	The management team that has overall responsibility for asset management. Managers engaged in asset management activities.	The documented information describing the main elements of the asset management system (process(es) and their interaction.
62	Information management	What has the organisation done to determine what its asset management information system(s) should contain in order to support its asset management system?	1		There is a small number of assets (about 2% by number) where the data requirements are not yet accurately reflected in NEL's data environment. It is noted that most of the checks are generic, and that there may be instances where a check sheet needs to be amended eg. where vacuum needs to be checked rather than oil level - a degree of common sense is used by the contractor and sheet amended where issue identified. NEL does not believe that any critical safety or asset integrity issues are being overlooked as a result of this.	Effective asset management requires appropriate information to be available. Widely used AM standards therefore require the organisation to identify the asset management information it requires in order to support its asset management system. Some of the information required may be held by suppliers. The maintenance and development of asset management information systems is a poorly understood specialist activity that is akin to IT management but different from IT management. This group of questions provides some indications as to whether the capability is available and applied. Note: To be effective, an asset information management system requires the mobilisation of technology, people and process(es) that create, secure, make available and destroy the information required to support the asset management system.	The organisation's strategic planning team. The management team that has overall responsibility for asset management. Information management team. Operations, maintenance and engineering managers	Details of the process the organisation has employed to determine what its asset information system should contain in order to support its asset management system. Evidence that this has been effectively implemented.
63	Information management	How does the organisation maintain its asset management information system(s) and ensure that the data held within it (them) is of the requisite quality and accuracy and is consistent?	3	The document control system has been inspected on a previous occasion. The RFP for the DELTA has been inspected, and confirmed that it requires fault data and as-builts to be returned to NEL.	The Business Systems Manager manages the document control system which requires approval to amend policies, standards etc. The Business Systems Manager confirmed that she follows up incomplete or doubtful inspection check-sheets with the contractor. The RFP for the DELTA contract specified that information feedback to NEL is a key aspect of the contract. It is noted that a change of pole inspector lead to an increased number of defects being reported, and this was addressed by inserting a 2nd tier of close-in inspections before ordering replacement.	The response to the questions is progressive. A higher scale cannot be awarded without achieving the requirements of the lower scale. This question explores how the organisation ensures that information management meets widely used AM practice requirements (eg, s 4.4.6 (a), (c) and (d) of PAS 55).	The management team that has overall responsibility for asset management. Users of the organisational information systems.	The asset management information system, together with the policies, procedure(s), improvement initiatives and audits regarding information controls.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
53	Communication , participation and consultation	How does the organisation ensure that pertinent asset management information is effectively communicated to and from employees and other stakeholders, including contracted service providers?	The organisation has not recognised the need to formally communicate any asset management information.	There is evidence that the pertinent asset management information to be shared along with those to share it with is being determined.	The organisation has determined pertinent information and relevant parties. Some effective two way communication is in place but as yet not all relevant parties are clear on their roles and responsibilities with respect to asset management information.	Two way communication is in place between all relevant parties, ensuring that information is effectively communicated to match the requirements of asset management strategy, plan(s) and process(es). Pertinent asset information requirements are regularly reviewed.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
59	Asset Management System documentation	What documentation has the organisation established to describe the main elements of its asset management system and interactions between them?	The organisation has not established documentation that describes the main elements of the asset management system.	The organisation is aware of the need to put documentation in place and is in the process of determining how to document the main elements of its asset management system.	The organisation is in the process of documenting its asset management system and has documentation in place that describes some, but not all, of the main elements of its asset management system and their interaction.	The organisation has established documentation that comprehensively describes all the main elements of its asset management system and the interactions between them. The documentation is kept up to date.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
62	Information management	What has the organisation done to determine what its asset management information system(s) should contain in order to support its asset management system?	The organisation has not considered what asset management information is required.	The organisation is aware of the need to determine in a structured manner what its asset information system should contain in order to support its asset management system and is in the process of deciding how to do this.	The organisation has developed a structured process to determine what its asset information system should contain in order to support its asset management system and has commenced implementation of the process.	The organisation has determined what its asset information system should contain in order to support its asset management system. The requirements relate to the whole life cycle and cover information originating from both internal and external sources.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
63	Information management	How does the organisation maintain its asset management information system(s) and ensure that the data held within it (them) is of the requisite quality and accuracy and is consistent?	There are no formal controls in place or controls are extremely limited in scope and/or effectiveness.	The organisation is aware of the need for effective controls and is in the process of developing an appropriate control process(es).	The organisation has developed a controls that will ensure the data held is of the requisite quality and accuracy and is consistent and is in the process of implementing them.	The organisation has effective controls in place that ensure the data held is of the requisite quality and accuracy and is consistent. The controls are regularly reviewed and improved where necessary.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
64	Information management	How has the organisation's ensured its asset management information system is relevant to its needs?	2		NEL has standardised assets, and over time the AM IS needs have become well aligned. NEL does recognise that new or different types of assets (but not new classes of assets) are being introduced due to technology changes, supplier obsolescence etc. NEL recognises that its processes for amending lifecycle procedures are informal, and that while manageable with the small numbers of new assets at present, this should be looked at for the future.	Widely used AM standards need not be prescriptive about the form of the asset management information system, but simply require that the asset management information system is appropriate to the organisations needs, can be effectively used and can supply information which is consistent and of the requisite quality and accuracy.	The organisation's strategic planning team. The management team that has overall responsibility for asset management. Information management team. Users of the organisational information systems.	The documented process the organisation employs to ensure its asset management information system aligns with its asset management requirements. Minutes of information systems review meetings involving users.
69	Risk management process(es)	How has the organisation documented process(es) and/or procedure(s) for the identification and assessment of asset and asset management related risks throughout the asset life cycle?	3	NEL's valid PSMS certificate has been inspected. The Network Extension Design & Construction Standards have been inspected, and confirmed as embodying standards that minimise safety and reliability risks. Commissioning sheets have been inspected.	Asset integrity risks are addressed thru' the Design Standards Manual and the Construction Standards Manual eg. NEL did not use 11kV XLPE cable due to bad experiences with water treeing, this is new being reviewed given the assurances of the new XLPE type cable. The asset inspection process is used to minimise the risks to public safety and supply interruption, and the insertion of a 2nd tier of close-in inspections provides additional assurance. There are also post-completion inspections of all new connection points (fuses and pillars) and a sample of maintenance work. The review of numbers of pole defects and the subsequent insertion of close-in inspections is evidence that data consistency issues are considered.	Risk management is an important foundation for proactive asset management. Its overall purpose is to understand the cause, effect and likelihood of adverse events occurring, to optimally manage such risks to an acceptable level, and to provide an audit trail for the management of risks. Widely used standards require the organisation to have process(es) and/or procedure(s) in place that set out how the organisation identifies and assesses asset and asset management related risks. The risks have to be considered across the four phases of the asset lifecycle (eg, para 4.3.3 of PAS 55).	The top management team in conjunction with the organisation's senior risk management representatives. There may also be input from the organisation's Safety, Health and Environment team. Staff who carry out risk identification and assessment.	The organisation's risk management framework and/or evidence of specific process(es) and/or procedure(s) that deal with risk control mechanisms. Evidence that the process(es) and/or procedure(s) are implemented across the business and maintained. Evidence of agendas and minutes from risk management meetings. Evidence of feedback in to process(es) and/or procedure(s) as a result of incident investigation(s). Risk registers and assessments.
79	Use and maintenance of asset risk information	How does the organisation ensure that the results of risk assessments provide input into the identification of adequate resources and training and competency needs?	1		The number and nature of network defects is stable, and that the current number and competency mix is sufficient. NEL acknowledges that as certain asset classes eg. 11kV cables transition into end-of-life, that field services numbers and competencies may need to increase.	Widely used AM standards require that the output from risk assessments are considered and that adequate resource (including staff) and training is identified to match the requirements. It is a further requirement that the effects of the control measures are considered, as there may be implications in resources and training required to achieve other objectives.	Staff responsible for risk assessment and those responsible for developing and approving resource and training plan(s). There may also be input from the organisation's Safety, Health and Environment team.	The organisations risk management framework. The organisation's resourcing plan(s) and training and competency plan(s). The organisation should be able to demonstrate appropriate linkages between the content of resource plan(s) and training and competency plan(s) to the risk assessments and risk control measures that have been developed.
82	Legal and other requirements	What procedure does the organisation have to identify and provide access to its legal, regulatory, statutory and other asset management requirements, and how is requirements incorporated into the asset management system?	2		P.Goodall indicated that NEL has a general awareness of primary legislative and regulatory requirements, but only some systematic analysis. NEL does rely on external advice including comprehensive advice from both shareholders as part of their management agreements.	In order for an organisation to comply with its legal, regulatory, statutory and other asset management requirements, the organisation first needs to ensure that it knows what they are (eg, PAS 55 specifies this in s 4.4.8). It is necessary to have systematic and auditable mechanisms in place to identify new and changing requirements. Widely used AM standards also require that requirements are incorporated into the asset management system (e.g. procedure(s) and process(es))	Top management. The organisations regulatory team. The organisation's legal team or advisors. The management team with overall responsibility for the asset management system. The organisation's health and safety team or advisors. The organisation's policy making team.	The organisational processes and procedures for ensuring information of this type is identified, made accessible to those requiring the information and is incorporated into asset management strategy and objectives

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
64	Information management	How has the organisation's ensured its asset management information system is relevant to its needs?	The organisation has not considered the need to determine the relevance of its management information system. At present there are major gaps between what the information system provides and the organisations needs.	The organisation understands the need to ensure its asset management information system is relevant to its needs and is determining an appropriate means by which it will achieve this. At present there are significant gaps between what the information system provides and the organisations needs.	The organisation has developed and is implementing a process to ensure its asset management information system is relevant to its needs. Gaps between what the information system provides and the organisations needs have been identified and action is being taken to close them.	The organisation's asset management information system aligns with its asset management requirements. Users can confirm that it is relevant to their needs.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
69	Risk management process(es)	How has the organisation documented process(es) and/or procedure(s) for the identification and assessment of asset and asset management related risks throughout the asset life cycle?	The organisation has not considered the need to document process(es) and/or procedure(s) for the identification and assessment of asset and asset management related risks throughout the asset life cycle.	The organisation is aware of the need to document the management of asset related risk across the asset lifecycle. The organisation has plan(s) to formally document all relevant process(es) and procedure(s) or has already commenced this activity.	The organisation is in the process of documenting the identification and assessment of asset related risk across the asset lifecycle but it is incomplete or there are inconsistencies between approaches and a lack of integration.	Identification and assessment of asset related risk across the asset lifecycle is fully documented. The organisation can demonstrate that appropriate documented mechanisms are integrated across life cycle phases and are being consistently applied.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
79	Use and maintenance of asset risk information	How does the organisation ensure that the results of risk assessments provide input into the identification of adequate resources and training and competency needs?	The organisation has not considered the need to conduct risk assessments.	The organisation is aware of the need to consider the results of risk assessments and effects of risk control measures to provide input into reviews of resources, training and competency needs. Current input is typically ad-hoc and reactive.	The organisation is in the process ensuring that outputs of risk assessment are included in developing requirements for resources and training. The implementation is incomplete and there are gaps and inconsistencies.	Outputs from risk assessments are consistently and systematically used as inputs to develop resources, training and competency requirements. Examples and evidence is available.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
82	Legal and other requirements	What procedure does the organisation have to identify and provide access to its legal, regulatory, statutory and other asset management requirements, and how is requirements incorporated into the asset management system?	The organisation has not considered the need to identify its legal, regulatory, statutory and other asset management requirements.	The organisation identifies some its legal, regulatory, statutory and other asset management requirements, but this is done in an ad-hoc manner in the absence of a procedure.	The organisation has procedure(s) to identify its legal, regulatory, statutory and other asset management requirements, but the information is not kept up to date, inadequate or inconsistently managed.	Evidence exists to demonstrate that the organisation's legal, regulatory, statutory and other asset management requirements are identified and kept up to date. Systematic mechanisms for identifying relevant legal and statutory requirements.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
88	Life Cycle Activities	How does the organisation establish implement and maintain process(es) for the implementation of its asset management plan(s) and control of activities across the creation, acquisition or enhancement of assets. This includes design, modification, procurement, construction and commissioning activities?	3	The Network Extension Design & Construction Standards manual has been inspected. This manual is referred to in the RFP for construction of an 11kV substation. The document control system has been inspected on a previous occasion.	Contracting out of field services was a major driver for compiling detailed standards and procedures. This occurred against a slowly evolving industry background that included issues such as worker safety, public safety, increasing pressure for supply continuity, reporting etc. These policies and standards are now mature and are controlled by a document management system.	Life cycle activities are about the implementation of asset management plan(s) i.e. they are the "doing" phase. They need to be done effectively and well in order for asset management to have any practical meaning. As a consequence, widely used standards (eg, PAS 55 s 4.5.1) require organisations to have in place appropriate process(es) and procedure(s) for the implementation of asset management plan(s) and control of lifecycle activities. This question explores those aspects relevant to asset creation.	Asset managers, design staff, construction staff and project managers from other impacted areas of the business, e.g. Procurement	Documented process(es) and procedure(s) which are relevant to demonstrating the effective management and control of life cycle activities during asset creation, acquisition, enhancement including design, modification, procurement, construction and commissioning.
91	Life Cycle Activities	How does the organisation ensure that process(es) and/or procedure(s) for the implementation of asset management plan(s) and control of activities during maintenance (and inspection) of assets are sufficient to ensure activities are carried out under specified conditions, are consistent with asset management strategy and control cost, risk and performance?	3	The Network Extension Design & Construction Standards manual has been inspected. This manual is referred to in the RFP for construction of an 11kV substation. The RFP for the Preventive Maintenance contract has been inspected, and confirmed that NEL's objectives of safety and supply continuity are embodied in the contract. The RFP also includes various check sheets that are aligned to asset condition, safety and reliability objectives.	AM processes and activities are controlled thru' the use of standards such as Design Standards Manual, the Construction Standards Manual, maintenance procedures, inspection check sheets etc. These standards reflect asset integrity and cost drivers, and are themselves controlled thru' a document control system. These asset quality, safety and reliability requirements are reflected in field services contracts.	Having documented process(es) which ensure the asset management plan(s) are implemented in accordance with any specified conditions, in a manner consistent with the asset management policy, strategy and objectives and in such a way that cost, risk and asset system performance are appropriately controlled is critical. They are an essential part of turning intention into action (eg, as required by PAS 55 s 4.5.1).	Asset managers, operations managers, maintenance managers and project managers from other impacted areas of the business	Documented procedure for review. Documented procedure for audit of process delivery. Records of previous audits, improvement actions and documented confirmation that actions have been carried out.
95	Performance and condition monitoring	How does the organisation measure the performance and condition of its assets?	3	Asset inspection check sheets have been inspected. The NEL Board reports include reporting of SAIDI and key works.	Asset condition is routinely assessed by ground-level inspections with a 2nd tier of close-in inspections if asset condition is in doubt. All major assets such as transformer kiosks are inspected every 6 months. This includes MDI and voltage readings to ensure that overloading is not occurring. Key performance measures that are reported on monthly to the General Manager include SAIDI, number of faults, description of faults causing more than 1 SAIDI minute, physical progress of CapEx works, financial performance of CapEx works, and	Widely used AM standards require that organisations establish implement and maintain procedure(s) to monitor and measure the performance and/or condition of assets and asset systems. They further set out requirements in some detail for reactive and proactive monitoring, and leading/lagging performance indicators together with the monitoring or results to provide input to corrective actions and continual improvement. There is an expectation that performance and condition monitoring will provide input to improving asset management strategy, objectives and plan(s).	A broad cross-section of the people involved in the organisation's asset-related activities from data input to decision-makers, i.e. an end-to end assessment. This should include contactors and other relevant third parties as appropriate.	Functional policy and/or strategy documents for performance or condition monitoring and measurement. The organisation's performance monitoring frameworks, balanced scorecards etc. Evidence of the reviews of any appropriate performance indicators and the action lists resulting from these reviews. Reports and trend analysis using performance and condition information. Evidence of the use of performance and condition information shaping improvements and supporting asset management strategy, objectives and plan(s).
99	Investigation of asset-related failures, incidents and nonconformities	How does the organisation ensure responsibility and the authority for the handling, investigation and mitigation of asset-related failures, incidents and emergency situations and non conformances is clear, unambiguous, understood and communicated?	3	Pg 2 of the Emergency Recovery Plan describes the authorities and duties for civil emergency situations. This is also described in Section 8.11 of the AMP.	Asset failures are investigated. Actions taken may include inspection of similar assets (eg. Andelect RMU's), redesign of assets (eg. underground transformer vaults), amending standards to ensure problematic asset configurations are avoided.	Widely used AM standards require that the organisation establishes implements and maintains process(es) for the handling and investigation of failures incidents and non-conformities for assets and sets down a number of expectations. Specifically this question examines the requirement to define clearly responsibilities and authorities for these activities, and communicate these unambiguously to relevant people including external stakeholders if appropriate.	The organisation's safety and environment management team. The team with overall responsibility for the management of the assets. People who have appointed roles within the asset-related investigation procedure, from those who carry out the investigations to senior management who review the recommendations. Operational controllers responsible for managing the asset base under fault conditions and maintaining services to consumers. Contractors and other third parties as appropriate.	Process(es) and procedure(s) for the handling, investigation and mitigation of asset-related failures, incidents and emergency situations and non conformances. Documentation of assigned responsibilities and authority to employees. Job Descriptions, Audit reports. Common communication systems i.e. all Job Descriptions on Internet etc.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
88	Life Cycle Activities	How does the organisation establish implement and maintain process(es) for the implementation of its asset management plan(s) and control of activities across the creation, acquisition or enhancement of assets. This includes design, modification, procurement, construction and commissioning activities?	The organisation does not have process(es) in place to manage and control the implementation of asset management plan(s) during activities related to asset creation including design, modification, procurement, construction and commissioning.	The organisation is aware of the need to have process(es) and procedure(s) in place to manage and control the implementation of asset management plan(s) during activities related to asset creation including design, modification, procurement, construction and commissioning but currently do not have these in place (note: procedure(s) may exist but they are inconsistent/incomplete).	The organisation is in the process of putting in place process(es) and procedure(s) to manage and control the implementation of asset management plan(s) during activities related to asset creation including design, modification, procurement, construction and commissioning. Gaps and inconsistencies are being addressed.	Effective process(es) and procedure(s) are in place to manage and control the implementation of asset management plan(s) during activities related to asset creation including design, modification, procurement, construction and commissioning.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
91	Life Cycle Activities	How does the organisation ensure that process(es) and/or procedure(s) for the implementation of asset management plan(s) and control of activities during maintenance (and inspection) of assets are sufficient to ensure activities are carried out under specified conditions, are consistent with asset management strategy and control cost, risk and performance?	The organisation does not have process(es)/procedure(s) in place to control or manage the implementation of asset management plan(s) during this life cycle phase.	The organisation is aware of the need to have process(es) and procedure(s) in place to manage and control the implementation of asset management plan(s) during this life cycle phase but currently do not have these in place and/or there is no mechanism for confirming they are effective and where needed modifying them.	The organisation is in the process of putting in place process(es) and procedure(s) to manage and control the implementation of asset management plan(s) during this life cycle phase. They include a process for confirming the process(es)/procedure(s) are effective and if necessary carrying out modifications.	The organisation has in place process(es) and procedure(s) to manage and control the implementation of asset management plan(s) during this life cycle phase. They include a process, which is itself regularly reviewed to ensure it is effective, for confirming the process(es)/procedure(s) are effective and if necessary carrying out modifications.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
95	Performance and condition monitoring	How does the organisation measure the performance and condition of its assets?	The organisation has not considered how to monitor the performance and condition of its assets.	The organisation recognises the need for monitoring asset performance but has not developed a coherent approach. Measures are incomplete, predominantly reactive and lagging. There is no linkage to asset management objectives.	The organisation is developing coherent asset performance monitoring linked to asset management objectives. Reactive and proactive measures are in place. Use is being made of leading indicators and analysis. Gaps and inconsistencies remain.	Consistent asset performance monitoring linked to asset management objectives is in place and universally used including reactive and proactive measures. Data quality management and review process are appropriate. Evidence of leading indicators and analysis.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
99	Investigation of asset-related failures, incidents and nonconformities	How does the organisation ensure responsibility and the authority for the handling, investigation and mitigation of asset-related failures, incidents and emergency situations and non conformances is clear, unambiguous, understood and communicated?	The organisation has not considered the need to define the appropriate responsibilities and the authorities.	The organisation understands the requirements and is in the process of determining how to define them.	The organisation are in the process of defining the responsibilities and authorities with evidence. Alternatively there are some gaps or inconsistencies in the identified responsibilities/authorities.	The organisation have defined the appropriate responsibilities and authorities and evidence is available to show that these are applied across the business and kept up to date.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.

Question No.	Function	Question	Score	Evidence—Summary	User Guidance	Why	Who	Record/document Information
105	Audit	What has the organisation done to establish procedure(s) for the audit of its asset management system (process(es))?	3	The TELARC assessment report of the SMS dated 21st December 2011 was inspected. An ESS audit report from December 2010 was also inspected.	AM policies and procedures have been reviewed as part of the SMS compilation, and then the SMS audit. NEL's policies and assets have been inspected by Energy Safety. The AMP has been prepared by experienced staff and is regularly reviewed by NTL and is assessed by the Commerce Commission.	This question seeks to explore what the organisation has done to comply with the standard practice AM audit requirements (eg, the associated requirements of PAS 55 s 4.6.4 and its linkages to s 4.7).	The management team responsible for its asset management procedure(s). The team with overall responsibility for the management of the assets. Audit teams, together with key staff responsible for asset management. For example, Asset Management Director, Engineering Director. People with responsibility for carrying out risk assessments	The organisation's asset-related audit procedure(s). The organisation's methodology(s) by which it determined the scope and frequency of the audits and the criteria by which it identified the appropriate audit personnel. Audit schedules, reports etc. Evidence of the procedure(s) by which the audit results are presented, together with any subsequent communications. The risk assessment schedule or risk registers.
109	Corrective & Preventative action	How does the organisation instigate appropriate corrective and/or preventive actions to eliminate or prevent the causes of identified poor performance and non conformance?	3	The Network Extension Design & Construction Standards manual has been inspected. Commissioning sheets have been examined.	Standards and procedures are used to build appropriate levels of safety and reliability into assets, that works are inspected after completion, that as-builts are received, and that asset inspections result in prioritised remedial work.	Having investigated asset related failures, incidents and non-conformances, and taken action to mitigate their consequences, an organisation is required to implement preventative and corrective actions to address root causes. Incident and failure investigations are only useful if appropriate actions are taken as a result to assess changes to a business's risk profile and ensure that appropriate arrangements are in place should a recurrence of the incident happen. Widely used AM standards also require that necessary changes arising from preventive or corrective action are made to the asset management system.	The management team responsible for its asset management procedure(s). The team with overall responsibility for the management of the assets. Audit and incident investigation teams. Staff responsible for planning and managing corrective and preventive actions.	Analysis records, meeting notes and minutes, modification records. Asset management plan(s), investigation reports, audit reports, improvement programmes and projects. Recorded changes to asset management procedure(s) and process(es). Condition and performance reviews. Maintenance reviews
113	Continual Improvement	How does the organisation achieve continual improvement in the optimal combination of costs, asset related risks and the performance and condition of assets and asset systems across the whole life cycle?	3	Close-in inspection reports were examined and there is process for scoping the close-in inspection based on the routine inspection results.	The 2 shareholders maintain a keen interest in continually optimising costs, asset inspection processes are amended eg. insertion of a 2nd tier of close-in inspections. NEL recognises that many of its processes appear optimal and it is not clear that the incremental benefits of process improvement will outweigh the incremental costs.	Widely used AM standards have requirements to establish, implement and maintain process(es)/procedure(s) for identifying, assessing, prioritising and implementing actions to achieve continual improvement. Specifically there is a requirement to demonstrate continual improvement in optimisation of cost risk and performance/condition of assets across the life cycle. This question explores an organisation's capabilities in this area—looking for systematic improvement mechanisms rather than reviews and audit (which are separately examined).	The top management of the organisation. The manager/team responsible for managing the organisation's asset management system, including its continual improvement. Managers responsible for policy development and implementation.	Records showing systematic exploration of improvement. Evidence of new techniques being explored and implemented. Changes in procedure(s) and process(es) reflecting improved use of optimisation tools/techniques and available information. Evidence of working parties and research.
115	Continual Improvement	How does the organisation seek and acquire knowledge about new asset management related technology and practices, and evaluate their potential benefit to the organisation?	3	NEL staff attend relevant courses, magazine articles are noted, involvement in EEA working parties, use of independent consultants, and advice from NTL.	NEL staff attend relevant courses, magazine articles are noted, involvement in EEA working parties, use of independent consultants, and advice from NTL.	One important aspect of continual improvement is where an organisation looks beyond its existing boundaries and knowledge base to look at what 'new things are on the market'. These new things can include equipment, process(es), tools, etc. An organisation which does this (eg, by the PAS 55 s 4.6 standards) will be able to demonstrate that it continually seeks to expand its knowledge of all things affecting its asset management approach and capabilities. The organisation will be able to demonstrate that it identifies any such opportunities to improve, evaluates them for suitability to its own organisation and implements them as appropriate. This question explores an organisation's approach to this activity.	The top management of the organisation. The manager/team responsible for managing the organisation's asset management system, including its continual improvement. People who monitor the various items that require monitoring for 'change'. People that implement changes to the organisation's policy, strategy, etc. People within an organisation with responsibility for investigating, evaluating, recommending and implementing new tools and techniques, etc.	Research and development projects and records, benchmarking and participation knowledge exchange professional forums. Evidence of correspondence relating to knowledge acquisition. Examples of change implementation and evaluation of new tools, and techniques linked to asset management strategy and objectives.

Question No.	Function	Question	Maturity Level 0	Maturity Level 1	Maturity Level 2	Maturity Level 3	Maturity Level 4
105	Audit	What has the organisation done to establish procedure(s) for the audit of its asset management system (process(es))?	The organisation has not recognised the need to establish procedure(s) for the audit of its asset management system.	The organisation understands the need for audit procedure(s) and is determining the appropriate scope, frequency and methodology(s).	The organisation is establishing its audit procedure(s) but they do not yet cover all the appropriate asset-related activities.	The organisation can demonstrate that its audit procedure(s) cover all the appropriate asset-related activities and the associated reporting of audit results. Audits are to an appropriate level of detail and consistently managed.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
109	Corrective & Preventative action	How does the organisation instigate appropriate corrective and/or preventive actions to eliminate or prevent the causes of identified poor performance and non conformance?	The organisation does not recognise the need to have systematic approaches to instigating corrective or preventive actions.	The organisation recognises the need to have systematic approaches to instigating corrective or preventive actions. There is ad-hoc implementation for corrective actions to address failures of assets but not the asset management system.	The need is recognized for systematic instigation of preventive and corrective actions to address root causes of non compliance or incidents identified by investigations, compliance evaluation or audit. It is only partially or inconsistently in place.	Mechanisms are consistently in place and effective for the systematic instigation of preventive and corrective actions to address root causes of non compliance or incidents identified by investigations, compliance evaluation or audit.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
113	Continual Improvement	How does the organisation achieve continual improvement in the optimal combination of costs, asset related risks and the performance and condition of assets and asset systems across the whole life cycle?	The organisation does not consider continual improvement of these factors to be a requirement, or has not considered the issue.	A Continual Improvement ethos is recognised as beneficial, however it has just been started, and or covers partially the asset drivers.	Continuous improvement process(es) are set out and include consideration of cost risk, performance and condition for assets managed across the whole life cycle but it is not yet being systematically applied.	There is evidence to show that continuous improvement process(es) which include consideration of cost risk, performance and condition for assets managed across the whole life cycle are being systematically applied.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.
115	Continual Improvement	How does the organisation seek and acquire knowledge about new asset management related technology and practices, and evaluate their potential benefit to the organisation?	The organisation makes no attempt to seek knowledge about new asset management related technology or practices.	The organisation is inward looking, however it recognises that asset management is not sector specific and other sectors have developed good practice and new ideas that could apply. Ad-hoc approach.	The organisation has initiated asset management communication within sector to share and, or identify 'new' to sector asset management practices and seeks to evaluate them.	The organisation actively engages internally and externally with other asset management practitioners, professional bodies and relevant conferences. Actively investigates and evaluates new practices and evolves its asset management activities using appropriate developments.	The organisation's process(es) surpass the standard required to comply with requirements set out in a recognised standard. The assessor is advised to note in the Evidence section why this is the case and the evidence seen.